



GROUND THAWING BLANKETS


Don't let the inconvenience of snow, ice, and frozen ground slow down your operations. The high-watt density in Powerblanket Ground Thawing Blankets help tackle the difficulty of thawing ground in harsh climates, thawing 12-18 inches of ground per day.

MONEY SAVED

Walsh Construction saved more than \$5.43 for every \$1.00 spent on Powerblanket® heating blankets during a wintertime cold weather concrete job. They calculated this based on cost of labor and materials to build and move heated enclosures along two-and-one-half miles of a concrete canal wall built for the Illinois Waterway.

WHY CHOOSE POWERBLANKET GROUND THAWING BLANKETS?

- High watt density thaws frozen ground
- Quickly remove frost prior to concrete pour
- Melt snow and ice from roofs, walkways, and construction areas
- Easily installed and removed
- Provides higher heat control when combined with a thermostatic controller
- Saves time, money, and labor

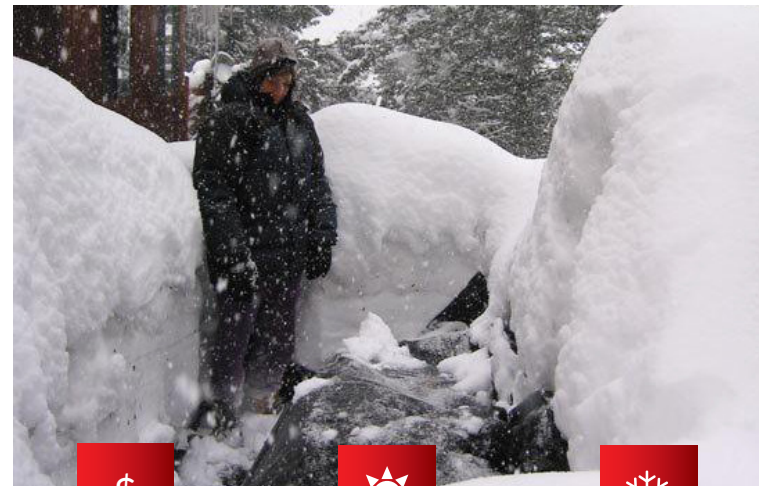

SAVE TIME
& MONEY



THAW 12"-18"
OF GROUND
PER DAY



EXTEND
WORKING
SEASON



WANT GREATER PEACE OF MIND?
Try Powerblanket with Beacon Controllers

powerblanket®
GROUND THAWING HEATERS

Product Category	Model #	Temperature Control	Heated Dimensions	Finished Dimensions	Heated Area	Plug Type	AC Voltage	Nominal Power	Nominal Amperage	Approximate Weight/ Mass
GROUND THAWING BLANKETS	EH0509	Internal Preset	5' x 9' / 1.52m x 2.7m	6' x 10' / 1.83m x 3.0m	45 sq ft / 4.2 sq m	20 AMP Plug	120V	1650W	13.8A	25 lbs / 11 kg
	EH0325	Internal Preset	3' x 25' / 0.91m x 7.6m	4' x 26' / 1.22m x 7.9m	75 sq ft / 7.0 sq m	30 AMP Plug, L5-30P	120V	2750W	22.9A	38 lbs / 17 kg
	EH0310	Internal Preset	3' x 10' / 0.91m x 3.0m	4' x 11' / 1.22m x 3.4m	30 sq ft / 2.8 sq m	15 AMP Plug	120V	1100W	9.17A	15 lbs / 7 kg
	EH0304	Internal Preset	3' x 4' / 0.91m x 1.22m	4' x 5' / 1.22m x 1.52m	12 sq ft / 1.11 sq m	15 AMP Plug	120V	400W	3.33A	6 lbs / 3 kg
	EH0202	Internal Preset	1.85' x 1.85' / 0.57m x 0.57m	2' x 2' / 0.61m x 0.61m	3.4 sq ft / 0.32 sq m	15 AMP Plug	120V	95W	0.79A	3 lbs / 1.5 kg

READY TO SHIP



TIME SAVED

"Your blankets are absolutely excellent. Thanks to the Powerblankets® we were able to quickly thaw the ground and complete our job. In fact, we estimate a savings of 10 hours per site equaling a savings of \$5,000 already. Calculating this to our thousands of sites, the savings is huge! We are excited about the time and money Powerblanket has saved us and look forward to future savings."

Kim Herman OSP/COEI Operations Manager Precision Utilities Group

PHONE: 844.773.6169
 FAX: 866.245.9483
 EMAIL: INFO@POWERBLANKET.COM
 3130 SOUTH 1030 WEST, SUITE 1
 SALT LAKE CITY, UT 84119

WWW.POWERBLANKET.COM