


Aug.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

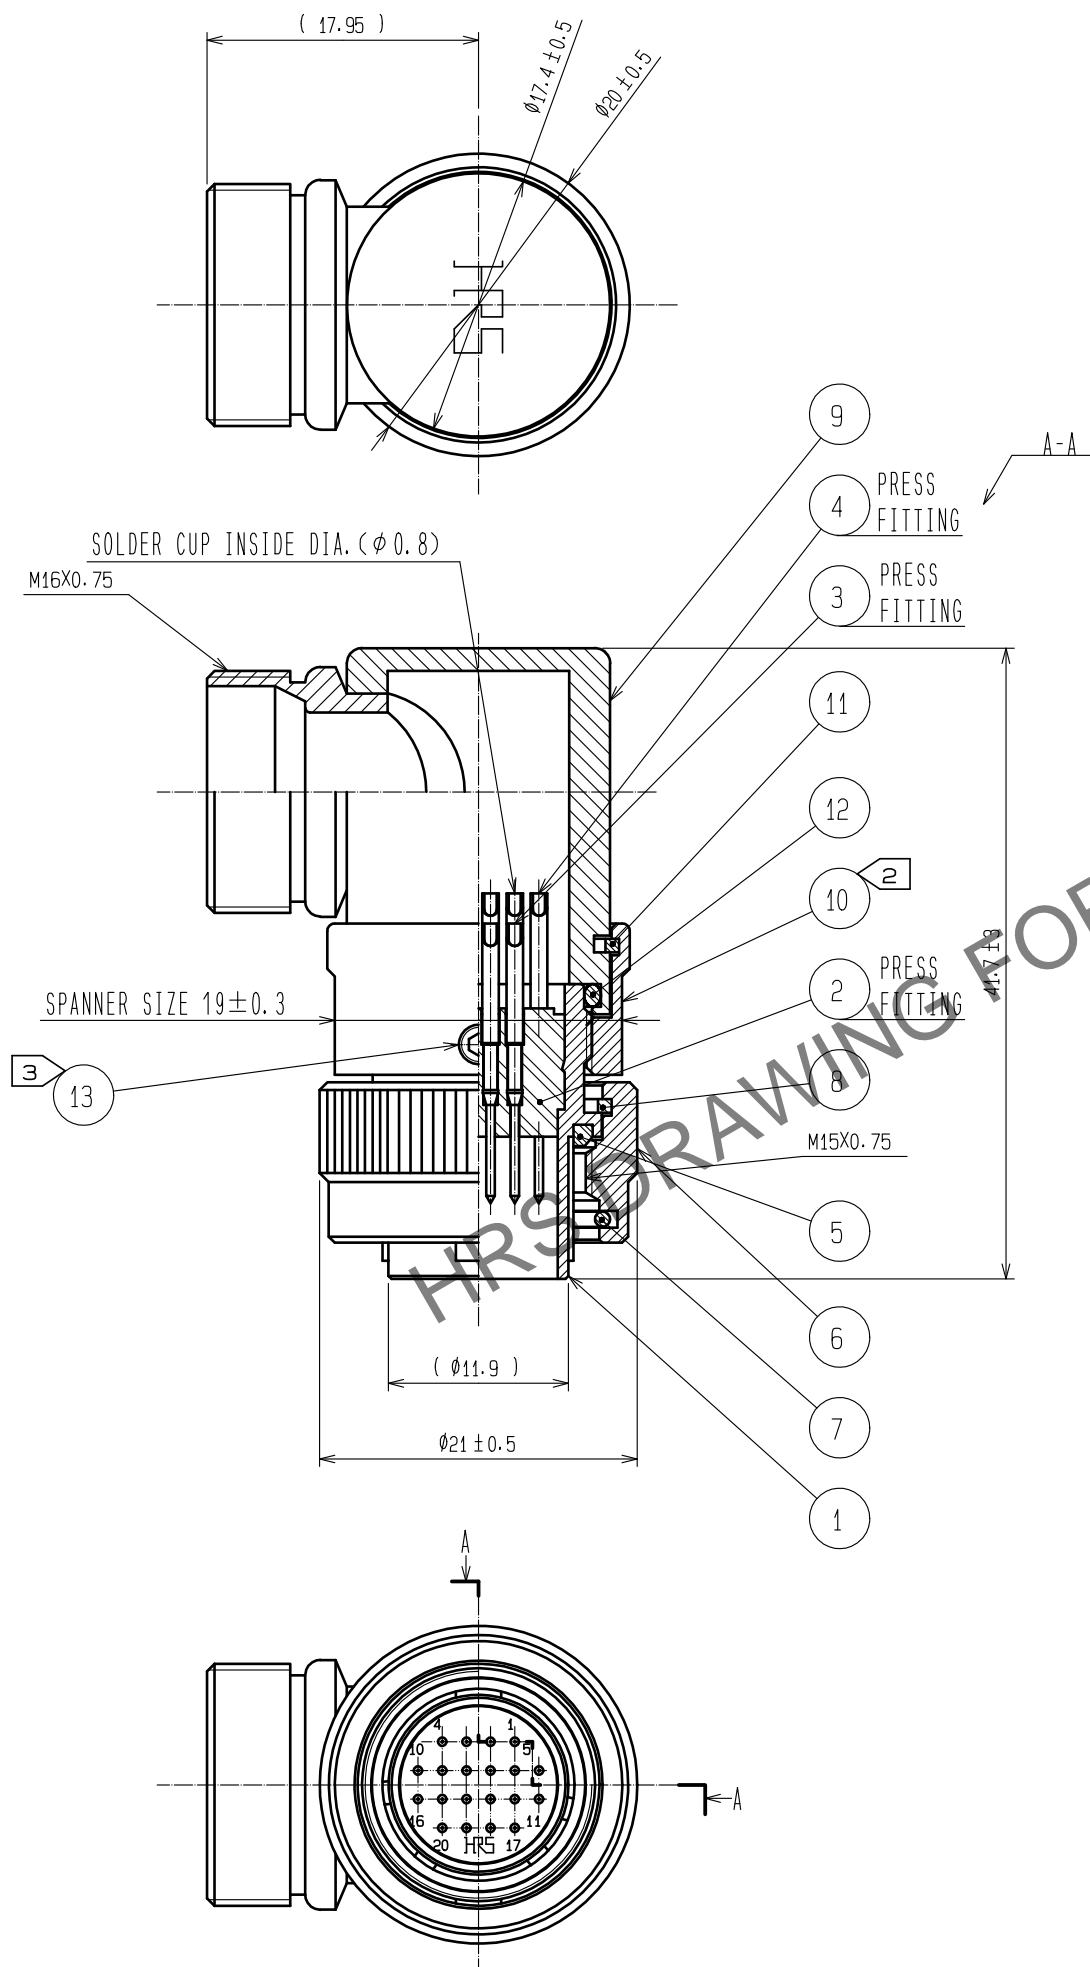

- NOTES
- ONE EXAMPLE OF THE ROTATION OF REF. NO. ①, ⑨ AND ⑩ IS SHOWN.
 - THE RECOMMENDED CLAMP TORQUE REF. NO. ⑩: 3 TO 4 N · m.
LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ⑩ FROM LOOSENING.
 - ACRISSE FLATS HEXAGON HEAD OF REF. NO. ⑬: 1.27
THE RECOMMENDED CLAMP TORQUE REF. NO. ⑬: 0.3 TO 0.4 N · m
LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ⑬ FROM LOOSENING.
 - THIS PRODUCT TO BE USED WITH CABLECLAMP, JR13WCC-*(72)
* DESIGNATE DIAMETER OF APPLICABLE CABLE.
LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT FROM LOOSENING.
 - THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER,
DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.

7	STEEL	NICKEL PLATING			
6	BRASS	NICKEL PLATING	13	STEEL	JISB1177 HEAGON SOCKET SET SCREW M2. 6×0. 45×2
5	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)	12	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
4	BRASS	SILVER PLATING 2 μm min.	11	PHOSPHOR BRONZE	NICKEL PLATING
3	BRASS	SILVER PLATING 2 μm min.	10	BRASS	NICKEL PLATING
2	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0	9	BRASS	NICKEL PLATING
1	ZINC ALLOY	NICKEL PLATING	8	PHOSPHOR BRONZE	NICKEL PLATING
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED	HY. KOBAYASHI	18.02.22	DRAWING NO. EDC-113405-31-00		
		CHECKED	HY. KOBAYASHI	18.02.22	PART NO. HR22-12WTL P-20P(31)		
		DESIGNED	HY. KISHI	18.02.21	CODE NO. CL122-0054-5-31		
		DRAWN	MK. INOUE	18.02.06	1/		