


Aug.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

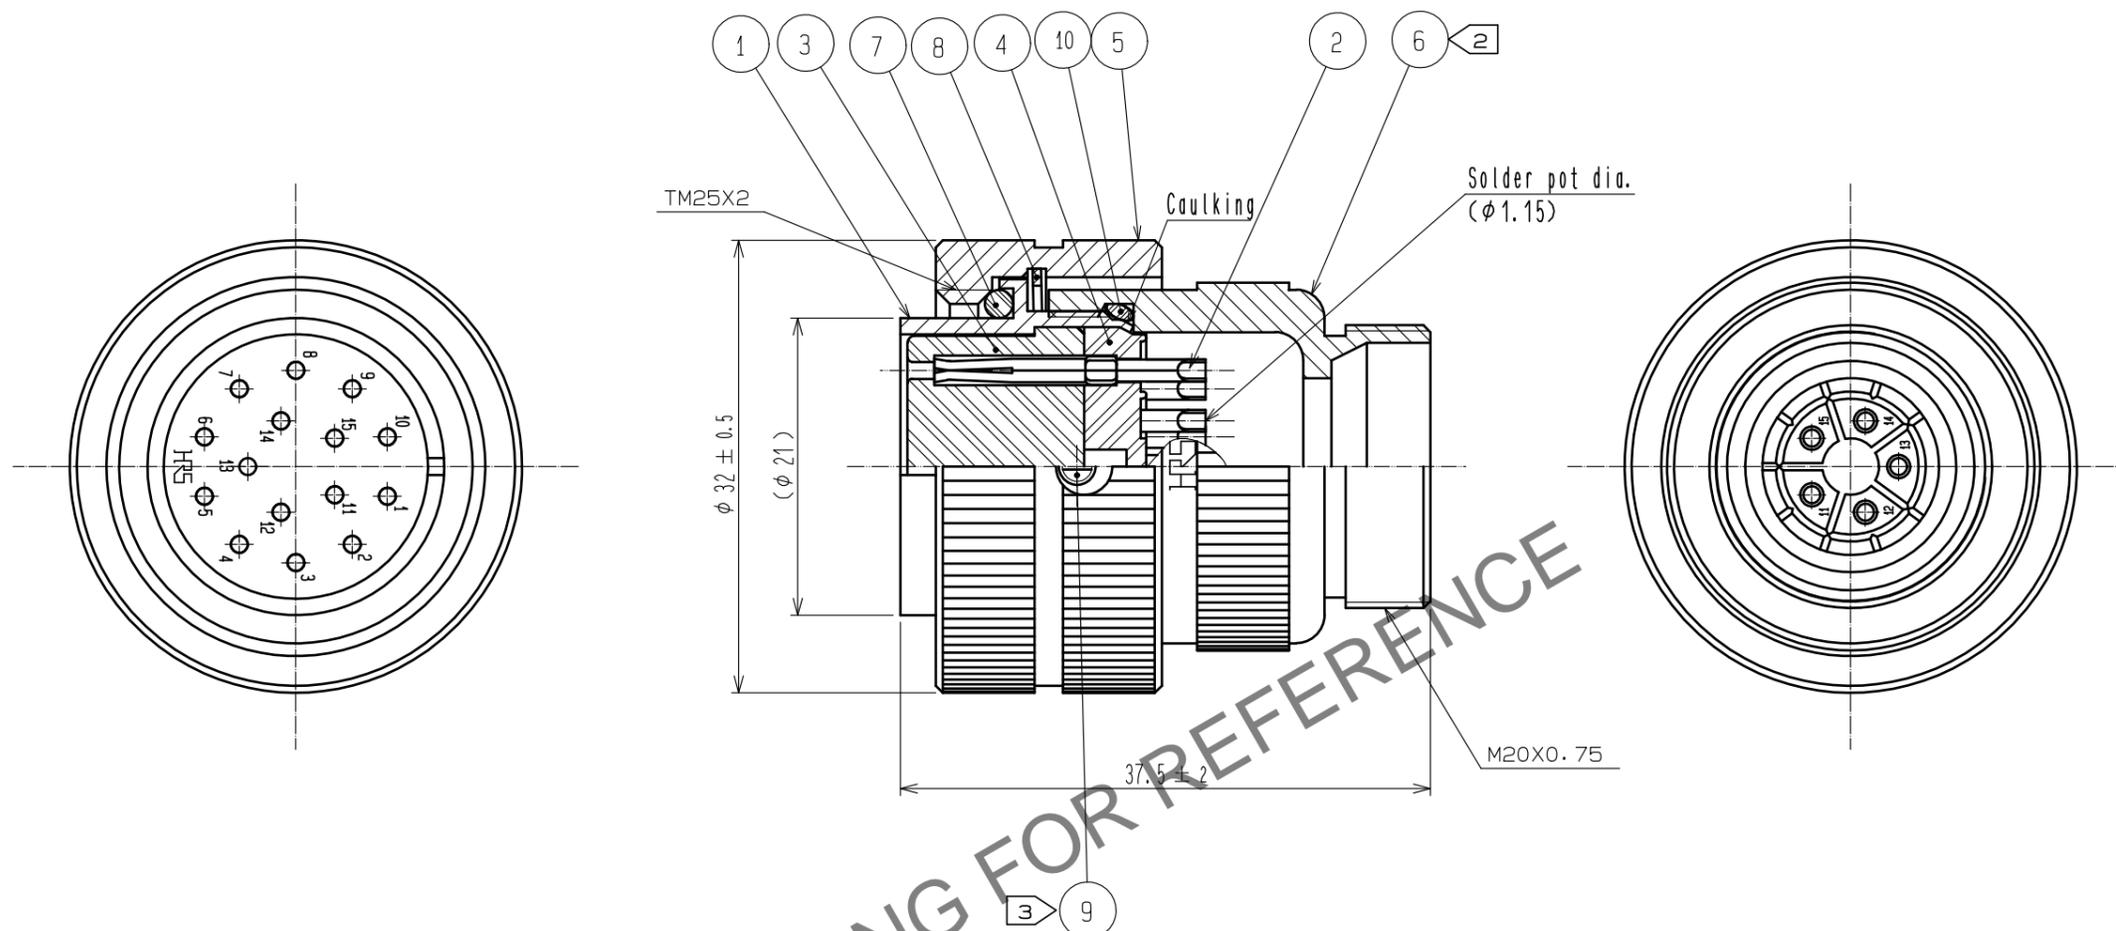

HRS DRAWING FOR REFERENCE

- Notes
- 1 One example of the rotation of ref. No. ⑥ to ref. No. ① is shown.
 - ② The recommended clamp torque of ref. No. ⑥ : 2 to 3 N·m.
 - ③ The recommended clamp torque of ref. No. ⑨ : 0.2 to 0.3 N·m.
 LOCTITE 263, HENKEL JAPAN or equivalent is recommended to prevent ref. No. ⑥ and ref. No. ⑧ from loosening.
 - 4 This products to be used with cable clamp RM21WTP-CP※(71)
 ※ designate diameter of applicable cable.
 - 5 The cable pull and twisting strength and other characteristics may differ, depending on the cable structure.
 Please confirm before the use.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
5	BRASS	NICKEL PLATING	10	CHLOROPRENE RUBBER	(BLACK)
4	PPS	(BLACK) UL94V-0	9	BRASS	NICKEL PLATING
3	PPS	(BLACK) UL94V-0	8	PHOSPHOR BRONZE	NICKEL PLATING
2	COPPER ALLOY	SILVER PLATING 5 μm.	7	CHLOROPRENE RUBBER	(BLACK)
1	BRASS	NICKEL PLATING	6	BRASS	NICKEL PLATING

UNITS mm			SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI	18.02.22	DRAWING NO.	EDC-110102-31-00			
		CHECKED : HY. KOBAYASHI	18.02.22	PART NO.	RM21WTP-15S(31)			
		DESIGNED : HY. KISHI	18.02.22	CODE NO.	CL109-1401-2-31			
		DRAWN : MK. INOUE	18.02.08		1/1			