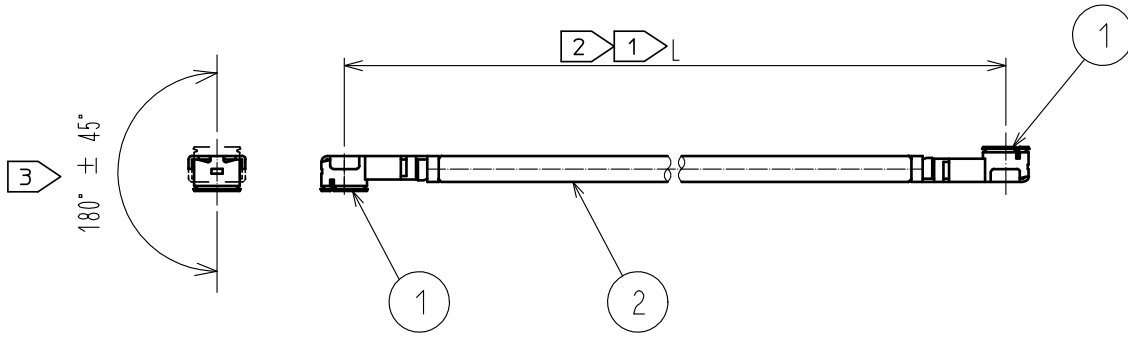
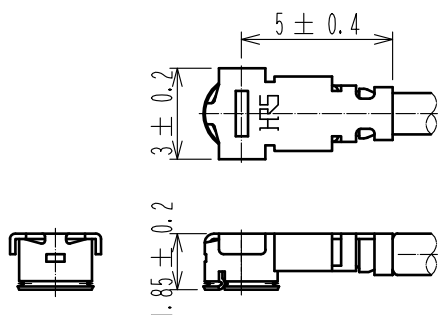




1		2		3		4											
																	
				<table border="1"><thead><tr><th>Part No.</th><th>Cable color</th></tr></thead><tbody><tr><td>~088*1T~</td><td>GRAY</td></tr><tr><td>~088*2T~</td><td>BLACK</td></tr></tbody></table>				Part No.	Cable color	~088*1T~	GRAY	~088*2T~	BLACK				
Part No.	Cable color																
~088*1T~	GRAY																
~088*2T~	BLACK																
<p>NOTE ① We indicate the length of the harness on the last of product name, 'L' part.</p> <p>② Tolerance for [L]</p> <table border="1"><thead><tr><th>Length L [mm]</th><th>Tolerance [mm]</th></tr></thead><tbody><tr><td>$35 \leq L \leq 200$</td><td>± 4</td></tr><tr><td>$200 < L \leq 500$</td><td>± 8</td></tr><tr><td>$500 < L \leq 1000$</td><td>± 12</td></tr><tr><td>$1000 < L$</td><td>$\pm 1.5\%$</td></tr></tbody></table> <p>③ Connector rotation angle is within ± 45 degree from the above image. For long length in the case of $L > 500$, the angle is optional.</p> <p>4. Specifications are subject to change without notice.</p> <p>【 DIMENSIONS OF CONNECTOR 】</p> 								Length L [mm]	Tolerance [mm]	$35 \leq L \leq 200$	± 4	$200 < L \leq 500$	± 8	$500 < L \leq 1000$	± 12	$1000 < L$	$\pm 1.5\%$
Length L [mm]	Tolerance [mm]																
$35 \leq L \leq 200$	± 4																
$200 < L \leq 500$	± 8																
$500 < L \leq 1000$	± 12																
$1000 < L$	$\pm 1.5\%$																
1 U. FL-LP-088HF(06)		CL331-0560-8-06		2 1.37 Dia. coaxial cable		HALOGEN FREE											
NO.	PART NO.	CODE NO.		NO.	PART NO.												
UNITS mm		SCALE FREE	COUNT ① 1	DESCRIPTION OF REVISIONS DIS-D-00003261		DESIGNED MS. MATSUMOTO	CHECKED MT. KANEKO	DATE 18. 06. 21									
 HIROSE ELECTRIC CO., LTD.		APPROVED	・NK. NINOMIYA	17. 12. 01	DRAWING NO.												
		CHECKED	・MT. KANEKO	17. 12. 01	PART NO. U. FL-2LPHF6-088* *T-AC-L ①												
		DESIGNED	・MS. MATSUMOTO	17. 12. 01	CODE NO.												
		DRAWN	・MS. MATSUMOTO	17. 12. 01	① 1/1												
FORM HC0011-5-51		2		3		4											