INDUCTORS

Inductors for power circuits Wound ferrite LTF-D series (for automotive)





FEATURES

O Magnetic shield type wound inductor for power circuits.

○ This is a low-profile product with a height of 2.2mm.

○ Operating temperature range: -40 to +150°C (including self-temperature rise)

Compliant with AEC-Q200

APPLICATION

O Automotive-related equipment (Car navigation, car audio, electronic power steering, headlights, other) O Application guides: Automotive (xEV), Car Infotainment

PART NUMBER CONSTRUCTION



CHARACTERISTICS SPECIFICATION TABLE

L		Measuring frequency	DC resistance		Rated current*		Part No.
					Isat	Itemp	
(µH)	Tolerance	(MHz)	(Ω)max.	(Ω)typ.	(A)max.	(A)typ.	
1.2	±30 %	1	0.028	0.023	2.80	3.30	LTF4022T-1R2N-D
1.8	±30%	1	0.034	0.028	2.40	3.00	LTF4022T-1R8N-D
2.2	±30%	1	0.041	0.036	2.00	2.60	LTF4022T-2R2N-D
3.3	±30%	1	0.064	0.056	1.60	2.10	LTF4022T-3R3N-D
4.7	±30%	1	0.090	0.077	1.30	1.80	LTF4022T-4R7N-D
6.8	±30 %	1	0.14	0.11	1.10	1.50	LTF4022T-6R8N-D
10	±20%	1	0.19	0.16	0.95	1.2	LTF4022T-100M-D
22	±20%	1	0.37	0.32	0.66	0.88	LTF4022T-220M-D
33	±20%	1	0.56	0.48	0.52	0.72	LTF4022T-330M-D
47	±20%	1	0.76	0.66	0.46	0.59	LTF4022T-470M-D
56	±20%	1	0.87	0.75	0.41	0.56	LTF4022T-560M-D

* Rated current(max.): smaller value of either Isat or Itemp.

Isat: When based on the inductance change rate (30% below the initial value)

Itemp: When based on the temperature increase (temperature increase of 40°C by self heating)

Measurement equipment

Product No.	Manufacturer
4294A	Keysight Technologies
VP-2941A	Panasonic
4285A+42841A+42842C	Keysight Technologies
	4294A VP-2941A


* Equivalent measurement equipment may be used.



Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading. (1/4)20180921


LTF4022-D type

L FREQUENCY CHARACTERISTICS

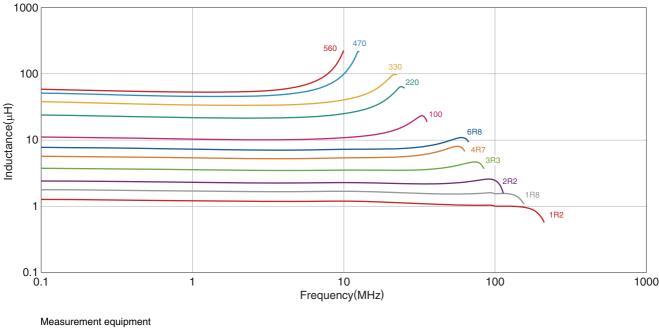

Product No.	Manufacturer	
4294A	Keysight Technologies	
* Equivalent measurement equipment may be used.		

■ INDUCTANCE VS. DC BIAS CHARACTERISTICS

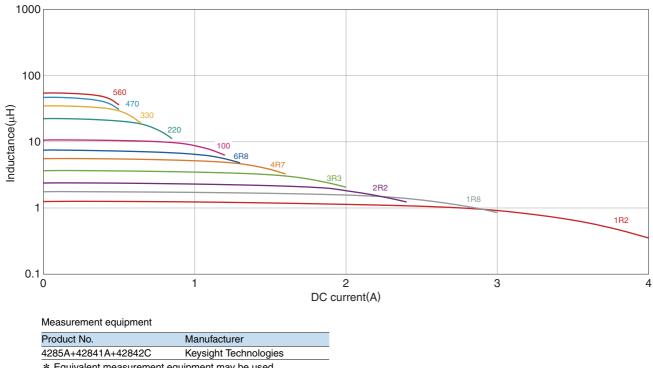


* Equivalent measurement equipment may be used.


A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading. (2/4)

LTF4022-D type

SHAPE & DIMENSIONS




PACKAGING STYLE



Dimensions in mm

TAPE DIMENSIONS



Туре	А	В	К
LTF4022-D	4.3±0.1	6.0±0.1	2.4±0.1

PACKAGE QUANTITY

Package quantity	500 pcs/reel
i ackage quantity	Soo heaveel

TEMPERATURE RANGE, INDIVIDUAL WEIGHT

	Operating temperature range*	Storage temperature range**	Individual weight
	–40 to 150 °C	–40 to 150 °C	0.12 g
*	Operating temperature range includes self-temperature rise.		


** The storage temperature range is for after the assembly.

RECOMMENDED LAND PATTERN



Dimensions in mm

RECOMMENDED REFLOW PROFILE

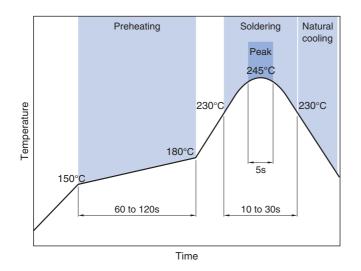

20180921

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

▲ REMINDERS

The storage period is less than 6 months. Be sure to follow the storage conditions (temperature: 5 to 30°C, humidity: 10 to 75% RH or less).

If the storage period elapses, the soldering of the terminal electrodes may deteriorate.

- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.
- If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- \bigcirc Do not use products that have received any excessive mechanical shock such as by being dropped.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Do not expose the products to magnets or magnetic fields.
- O The performance of the product may deteriorate if coating materials are used, thus please assess the situation beforehand by taking this factor into consideration.
- O Do not use for a purpose outside of the contents regulated in the delivery specifications.
- The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- (1) Aerospace/aviation equipment
- (2) Transportation equipment (electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.