

Nextion Basic NX4832T035 - Generic 3.5" HMI 480*320 Touch Display for Arduino Raspberry Pi

SKU 104990604

PRODUCT DETAILS

Key Features

- Nextion TFT resistive touch display
- 3.5" with 480*320 resolution
- Providing HMI function for external device like Arduino board or Raspberry Pi
- Including GUI development software and many API commands for GUI development

Description

Nextion is a Human Machine Interface(HMI) solution that provides a control and visualization interface between a human and a process, machine, application, or appliance. Nextion is not just a touch display, and it has a hardware part and a software part which is well developed for HMI applications.

Nextion(NX4832T035) display is a TFT display with a resolution of 400*240. The touch panel for this display is resistive touch. Nextion has only one serial(TTL) for power supply or connection with peripheral devices like Arduino board or Raspberry Pi. What 's more? Nextion display has an MCU, and its frequency is up to 48MHz. With the help of 16MB flash, 3584Byte RAM, and an SD card socket, this display is embedded with a rich storage for HMI programming.

As for the software part, Nextion has rich resources. [Nextion Editor](#) is a Windows software for GUI development. There are [libraries](#) for serial communication with Arduino boards and Raspberry Pi. Moreover, a mass of API is defined for users in [The Nextion Instruction Set](#). With these resources, I believe you will have an easy experience with this display.



<https://youtu.be/FMWQ1dXZr2I>

Caution:


Working under insufficient power supply condition will damage the Nextion model easily.



Blurred screen? Flashing? You may be suffering from power shortages. Power off at the first possible moment. No more repeated attempts to damage your Nextion model.

A small connector is included in the package. Please try to power Nextion with your phone charger through the connector to check if Nextion works well.

A high quality usb cable is required.

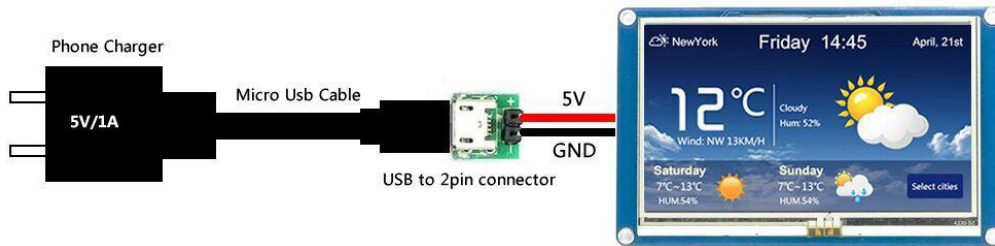

Nextion User Manual: <http://goo.gl/LbvAJ5>

TFT with Touch Panel



What's on board?



Nextion Editor Interface:

- Menu: File, Tool, Help, About
- Toolbar: Open, New, Save, Compile, Debug, Download, Add Component, Delete Component, Copy, Paste, Resolution, ID, XY
- Component Palette: text button, progress bar, picture, crop, gauges, touch area
- Fonts: 0-arial-0216, (opt 95, size 1, 525), 1-arial-1224, (opt 95, size 3, 825), 2-arial-1632, (opt 95, size 6, 002)
- Properties Panel (ID: 1 Text):

objname	ID
sta	crop image
picc	7
picc	204T
font	0
scan	1
ycan	1
txt	page 1:...
txt-mat1	30
x	10
y	186
w	153
h	24

01 **WYSIWYG**

02 **ON-line simulator**

03 **FFF**

Space Usage: 2,057K

01

WYSIWYG

What You See Is What You Get. Just lay the display out with the objects and code is written automatically.

02

ON-line simulator

You can design without even a screen in hand. And you can use an external MCU to control the simulate screen as well.

03

FFF

Free Full-Function Software. Users can use the Editor freely, full-functions without any charge.



Specification

Item	Value
Color	64K 65536 colors
Resolution	400×240 pixel
Touch-type	Resistive
Touches	> 1 million
Backlight	LED

Backlight lifetime (Average)	> 30,000 Hours
Operating Voltage	5V
Operating Current	145mA Normal Mode, 15mA Sleeping Mode
Power supply recommend	5V, 500mA, DC
Serial Port Baudrate	2400(Min), 9600(Typical),115200(Max)
Serial Port Mode	TTL
Serial Port	4Pin_2.54mm
USB interface	NO
SD card socket	Yes (FAT32 format), support maximum 32G Micro SD Card
FLASH Memory	16 MB
RAM Memory	3584 Byte

Dimension

3.5" _Nextion_Dimension

Part List

- Nextion NX4832T035*1
- Power Supply Test Board*1
- XH2.54 4P Wire*1

Related Nextion Display

Type of Display	NX3224T0 24	NX4024T0 32	NX4832T0 35	NX4827T0 43	NX8048P0 70-011R	NX1060P1 01-011C-I
Size	2.4"	3.2"	3.5"	4.3"	7.0"	10.1"
Resolution	320*240	400*240	480*320	480*272	800*480	1024*600
Touch panel	RTP	RTP	RTP	RTP	RTP	CTP
Flash	4MB	4MB	16MB	16MB	128MB	128MB
RAM	3584Byte	3584Byte	3584Byte	3584Byte	512KB	512KB
MCU Frequency	48 MHz	48 MHz	48 MHz	48 MHz	200 MHz	200 MHz
EEPROM	-	-	-	-	1024Byte	1024Byte
GPIOs	-	-	-	-	8	8
RTC	-	-	-	-	Yes	Yes
Price	\$	\$	\$	\$	\$	\$

ECCN/HTS

HSCODE

9013803010

UPC

LEARN AND DOCUMENTS

Documentations

Software: **Nextion Editor**

Libraries for Arduino or Raspberry Pi

Editor Guide

The Nextion Instruction Set

Datasheet

SHARED BY USERS

Share your Project

REVIEWS

Only registered users can write reviews. Please [Sign in](#) or [create an account](#)



