



Quality Products. Service Excellence.


General Replacement Tube Output (8 Watt) Push-Pull 125H Series

Features

- Designed for general purpose or replacement use in push-pull tube output circuits.
- Frequency response: 150 Hz. - 15 KHz (+/- 1db max. ref. 1 KHz)
- Open style with minimum 5" long primary leads, secondary solder lugs for convenient secondary connections.
- Also see our **125J Series**.
- For single ended use, see our **125SE Series**.
- For more impedance options, see our universal impedance push-pull **125 Series**.



Ask About
Custom
Transformers
& Chokes

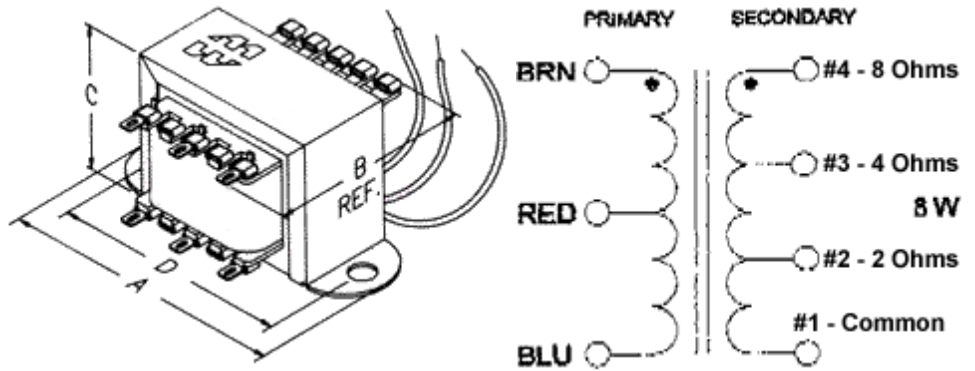

Part No.	Audio Watts	Primary		Secondary		Overall Dimensions				Mounting Hole G
		Impedance (Ohms)	Inductance	Impedance (Ohms)	Weight (lbs.)	A	B	C	D	
125H	8	10K	5.60 H	2, 4 or 8	0.55	2.81	1.00	1.63	2.38	0.19

Tags: audio transformer, tube audio, valve audio, push-pull, Data subject to change without notice output, tube output, 8 watt

© 2023. Hammond Manufacturing Ltd. All rights reserved.