

DESCRIPTION

The MPQ6411 is a windowed watchdog timer. It is used to reset and monitor the microcontroller. In normal operation, the MCU sends a trigger signal to the MPQ6411 in a defined time window cyclically. A missing or fault trigger signal causes the watchdog to reset the MCU.

The MPQ6411 provides a reset signal (low-level voltage) to the MCU during power-up or under voltage. Its power supply (VCC) has 5V and 3.3V options.

By setting MODE to high or low, the watchdog operates in long window mode or short window mode; the window is programmable.

The MPQ6411 is available in SOIC8 package.

FEATURES

- Windowed Watchdog
- Power-On Reset during Power-Up and Under Voltage
- Programmable Short Window Mode or Long Window Mode
- Watchdog Disable Function
- Low Shutdown Mode Current
- SOIC8 Package
- Available in AEC-Q100 Grade 1



APPLICATIONS

- Automotive Systems
- Industrial Systems

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance.

"MPS" and "The Future of Analog IC Technology" are registered trademarks of Monolithic Power Systems, Inc.

TYPICAL APPLICATION

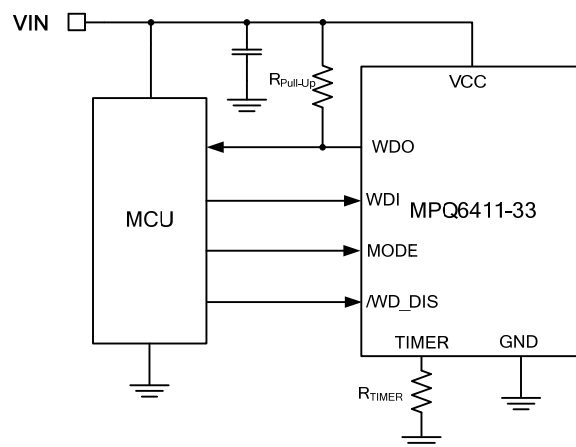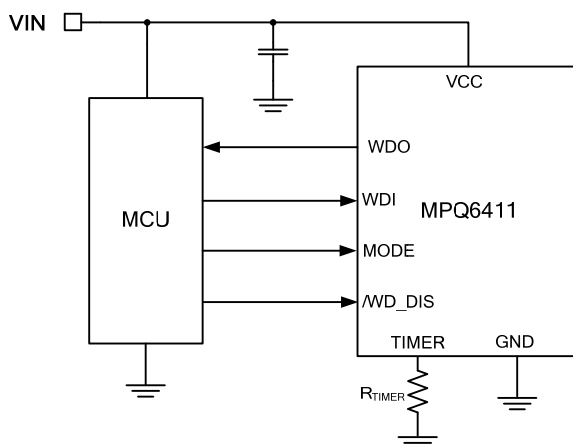

ORDERING INFORMATION

| Part Number* | Package | Top Marking |
|---------------------|---------|------------------|
| MPQ6411GS | SOIC-8 | <i>See Below</i> |
| MPQ6411GS-AEC1 | SOIC-8 | |
| MPQ6411GS-33** | SOIC-8 | |
| MPQ6411GS-33-AEC1** | SOIC-8 | |

* For Tape & Reel, add suffix –Z (e.g. MPQ6411GS–Z);

** Pre-release

TOP MARKING

MP6411
LLLLLLLL
MPSYWW

MP6411: Product code of MPQ6411GS and MPQ6411GS-AEC1

LLLLLLLL: Lot number

MPS: MPS prefix

Y: Year code

WW: Week code

TOP MARKING

M6411-33
LLLLLLLL
MPSYWW

M6411-33: Product code of MPQ6411GS-33 and MPQ6411GS-33-AEC1


LLLLLLLL: Lot number

MPS: MPS prefix

Y: Year code

WW: Week code

PACKAGE REFERENCE

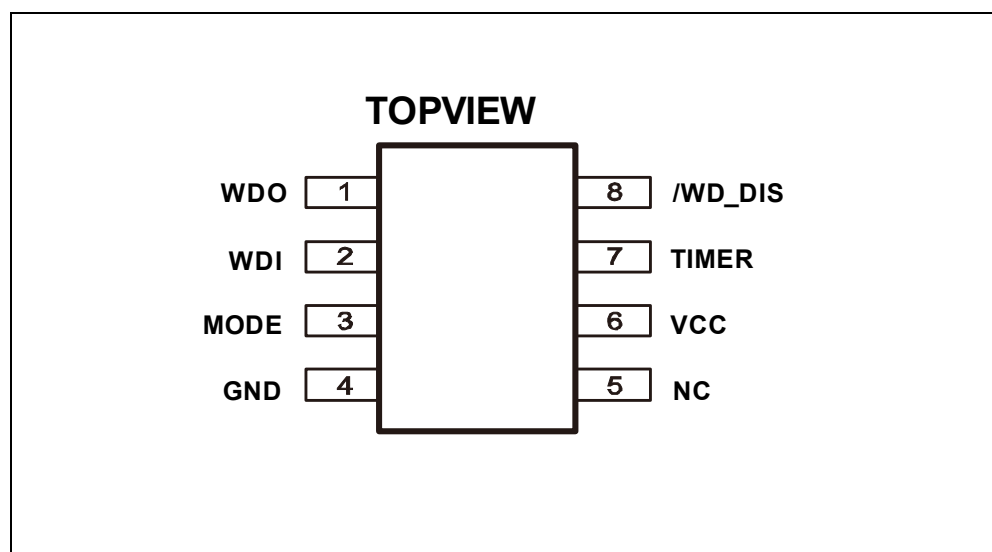

ABSOLUTE MAXIMUM RATINGS ⁽¹⁾

All pins-0.3V to +6V

Continuous power dissipation ($T_A = +25^{\circ}\text{C}$) ⁽²⁾

SOIC8.....1.3W

Junction temperature.....150°C

Lead temperature260°C

Storage temperature..... -65°C to +150°C

Recommended Operating Conditions

Supply voltage (VCC)

MPQ6411..... 5V

MPQ6411-33.....3.3V

Operating junction temp. (T_J)..... -40°C to 125°C

Thermal Resistance ⁽³⁾

| | θ_{JA} | θ_{JC} |
|-------------|---------------|---------------|
| SOIC-8..... | 96..... | 45...°C/W |

Notes:

- Exceeding these ratings may damage the device.
- The maximum allowable power dissipation is a function of the maximum junction temperature T_J (MAX), the junction-to-ambient thermal resistance θ_{JA} , and the ambient temperature T_A . The maximum allowable continuous power dissipation at any ambient temperature is calculated by P_D (MAX) = $(T_J$ (MAX)- T_A)/ θ_{JA} . Exceeding the maximum allowable power dissipation will cause an excessive die temperature, causing the regulator to go into thermal shutdown. Internal thermal shutdown circuitry protects the device from permanent damage.
- Measured on JESD51-7, 4-layer PCB.

ELECTRICAL CHARACTERISTICS

VCC = 5V for MPQ6411, VCC = 3.3V for MPQ6411-33, T_J = - 40°C to +125°C, unless otherwise noted.

| Parameter | Symbol | Condition | Min | Typ | Max | Units |
|--|-----------------------|--|------|------|------|-------|
| Power Supply | | | | | | |
| Timer voltage | | R _{TIMER} = 51k | | 0.3 | | V |
| Quiescent current | I _Q | MPQ6411, R _{TIMER} = 100k | | 16 | 19 | μA |
| | | MPQ6411-33, R _{TIMER} = 100k | | 10 | 14 | |
| | | MPQ6411, R _{TIMER} = 51k | | 25 | 32 | μA |
| | | MPQ6411-33, R _{TIMER} = 51k | | 14 | 18 | |
| Power on reset threshold | V _{POR-HIGH} | MPQ6411, WDO goes high with rising VCC | 4.4 | 4.6 | 4.8 | V |
| | | MPQ6411-33, WDO goes high with rising VCC | 2.9 | 3 | 3.1 | |
| | V _{POR-LOW} | MPQ6411, WDO goes low with falling VCC | 4.3 | 4.5 | 4.7 | V |
| | | MPQ6411-33, WDO goes low with falling VCC | 2.8 | 2.9 | 3 | |
| Timing | | | | | | |
| Single period | T | R _{TIMER} = 51k | -10% | 880 | +10% | μs |
| Power on delay ⁽⁴⁾ | t ₀ | R _{TIMER} = 51k | | 10 | | cycle |
| Sync signal monitoring time ⁽⁴⁾ | t ₁ | R _{TIMER} = 51k | | 450 | | cycle |
| Watchdog window close time (short mode) ⁽⁴⁾ | t ₂ | R _{TIMER} = 51k, MODE = low | | 15 | | cycle |
| Watchdog window open time (short mode) ⁽⁴⁾ | t ₃ | R _{TIMER} = 51k, MODE = low | | 10 | | cycle |
| Watchdog window close time (long mode) ⁽⁴⁾ | t ₄ | R _{TIMER} = 51k, MODE = high | | 1500 | | cycle |
| Watchdog window open time (long mode) ⁽⁴⁾ | t ₅ | R _{TIMER} = 51k, MODE = high | | 1000 | | cycle |
| WDO reset pulse width ⁽⁴⁾ | t ₆ | R _{TIMER} = 51k | | 4 | | cycle |
| WDI_OK pulse width | | | 10 | | 5000 | μs |
| Input and Output | | | | | | |
| WDI logic high | | MPQ6411 | 3.2 | | | V |
| | | MPQ6411-33 | 2.1 | | | |
| WDI logic low | | MPQ6411 | | | 0.8 | V |
| | | MPQ6411-33 | | | 0.6 | |
| MODE logic high | | MPQ6411 | 3.2 | | | V |
| | | MPQ6411-33 | 2.1 | | | |
| MODE logic low | | MPQ6411 | | | 0.8 | V |
| | | MPQ6411-33 | | | 0.6 | |

ELECTRICAL CHARACTERISTICS *(continued)*

VCC = 5V for MPQ6411, VCC = 3.3V for MPQ6411-33, T_J = - 40°C to +125°C, unless otherwise noted.







| Parameter | Symbol | Condition | Min | Typ | Max | Units |
|-----------------------|--------|--|----------------------|-----|-----|-------|
| MODE input Current | | MPQ6411, MODE = 5V | | 0.1 | 1 | μA |
| | | MPQ6411-33, MODE = 3.3V | | | | |
| | | MPQ6411, MODE = 0V | | 5 | 8 | μA |
| | | MPQ6411-33, MODE = 0V | | | | |
| /WD_DIS logic high | | MPQ6411 | 3.2 | | | V |
| | | MPQ6411-33 | 2.1 | | | |
| /WD_DIS logic low | | MPQ6411 | | | 0.8 | V |
| | | MPQ6411-33 | | | 0.6 | |
| /WD_DIS input Current | | MPQ6411, WD_DIS = 5V | | 0.1 | 1 | μA |
| | | MPQ6411-33, WD_DIS = 3.3V | | | | |
| | | MPQ6411, WD_DIS = 0V | | 5 | 8 | μA |
| | | MPQ6411-33, WD_DIS = 0V | | | | |
| WDO high | | MPQ6411, VCC = 5V, I _{WDO} = 1mA | V _{CC} -0.2 | | | V |
| | | MPQ6411-33, VCC=3.3V, R _{Pull-Up} =100KΩ | 3.29 | | | |
| WDO low | | MPQ6411, VCC = 5V, I _{WDO} = 1mA | | | 0.2 | V |
| | | MPQ6411, VCC = 1V, I _{WDO} = 300μA | | | 0.1 | |
| | | MPQ6411-33, Sink 1mA Current | | | 0.1 | |

Notes:

4) Derived from bench characterization. Not tested in production.

TYPICAL CHARACTERISTICS

VCC=5V for MPQ6411, VCC=3.3V for MPQ6411-33, unless otherwise noted.

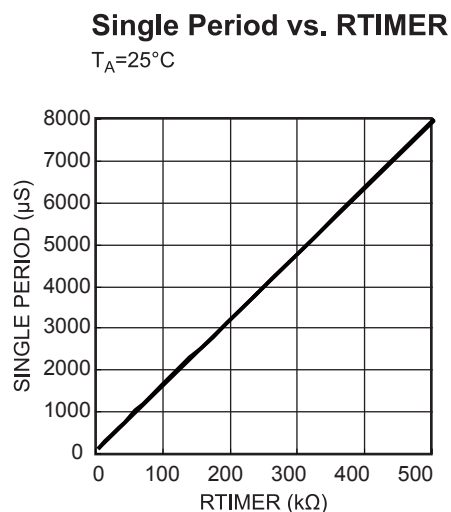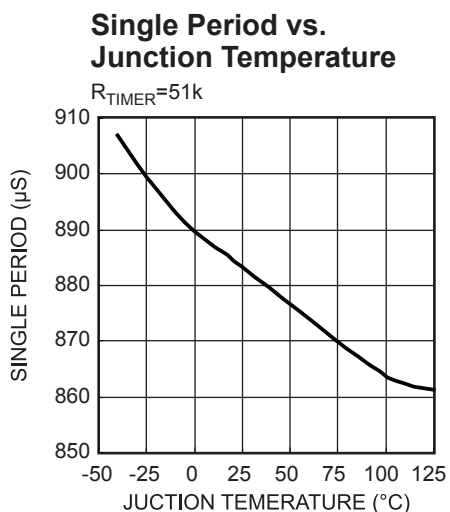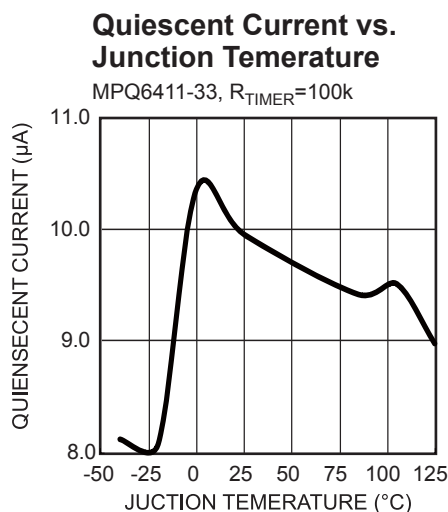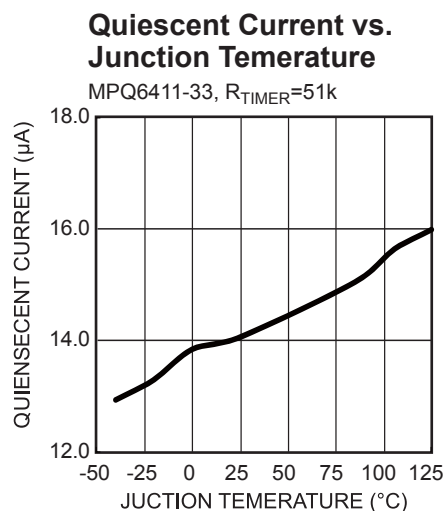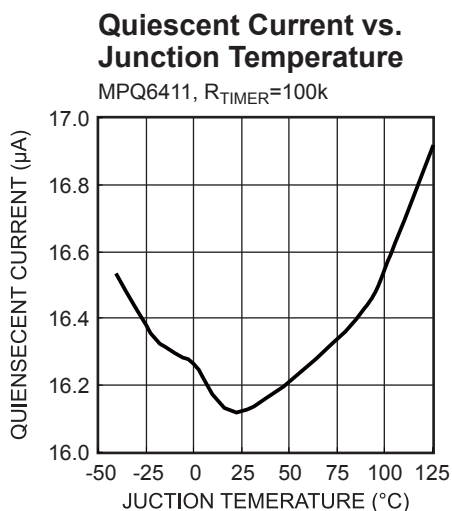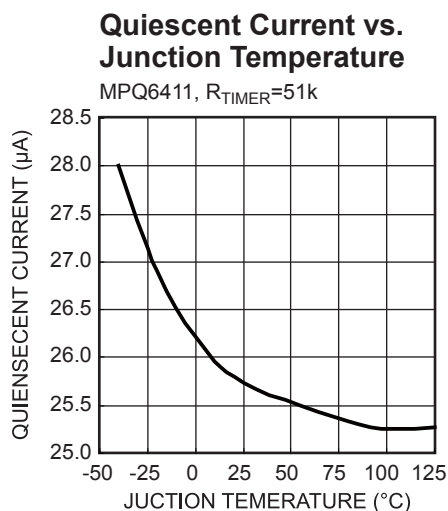

PIN FUNCTION

| Pin # | Name | Description |
|-------|---------|---|
| 1 | WDO | Watchdog output. WDO outputs a reset signal to the MCU. MPQ6411 WDO is the output of a inverter, it is not must to connect WDO to VCC or another voltage source through a resistor. MPQ6411-33 WDO is the open drain of a MOSFET and should be connected to VCC or another voltage source through a resistor (e.g.100kΩ). |
| 2 | WDI | Watchdog input. WDI receives the trigger signal from the MCU. |
| 3 | MODE | Mode switching pin. Pull MODE high to make the watchdog operate in long window mode; pull MODE low to make it work in short window mode. MODE has a weak internal pull-up. |
| 4 | GND | Ground. |
| 5 | NC | Not connected. |
| 6 | VCC | Power input. |
| 7 | TIMER | Watchdog timer pin. TIMER sets the time-out with an external resistor |
| 8 | /WD_DIS | Watchdog disable pin. Pull /WD_DIS low to disable the watchdog; pull /WD_DIS high to enable the watchdog. It has a weak internal pull-up. |

FUNCTIONAL BLOCK DIAGRAM


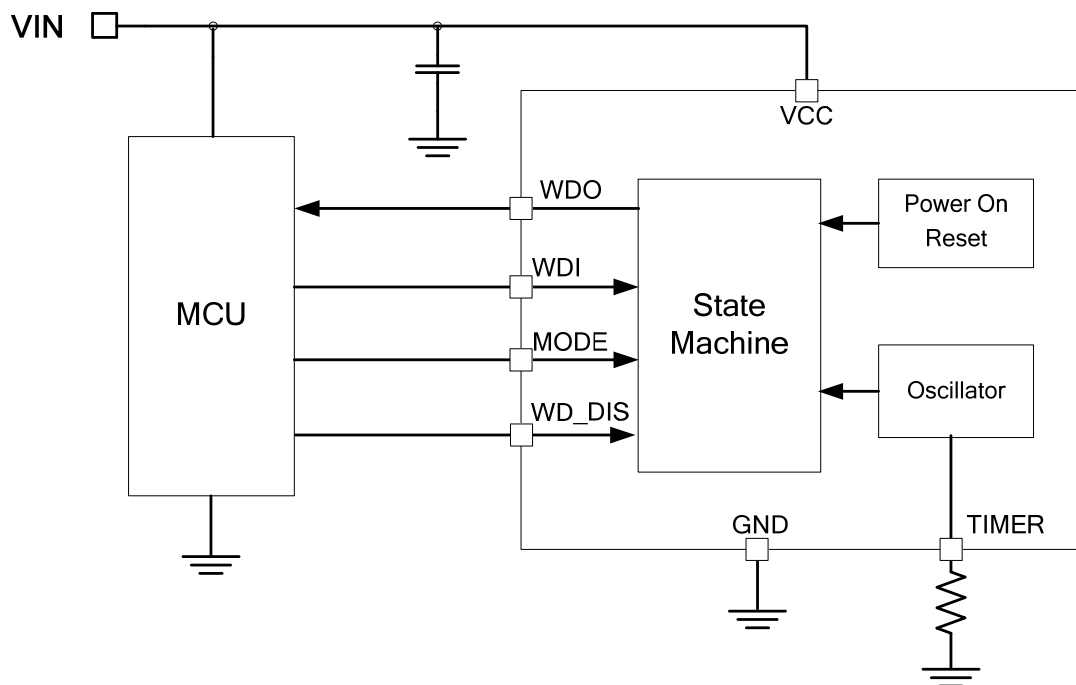



Figure 1: Functional Block Diagram

TIMING DIAGRAM


Power-on reset and no sync signal

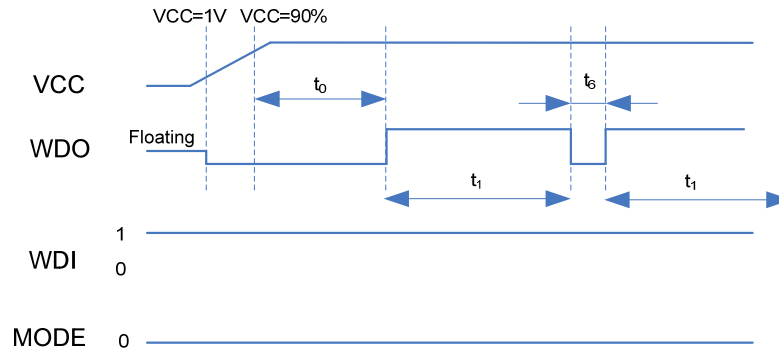


Synchronized by WDI and triggered in open window (MODE=0, short window mode)

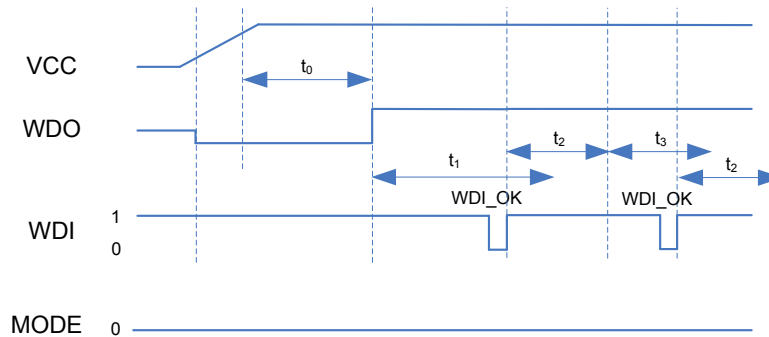

Synchronized by WDI and no trigger signal (MODE=0, short window mode)

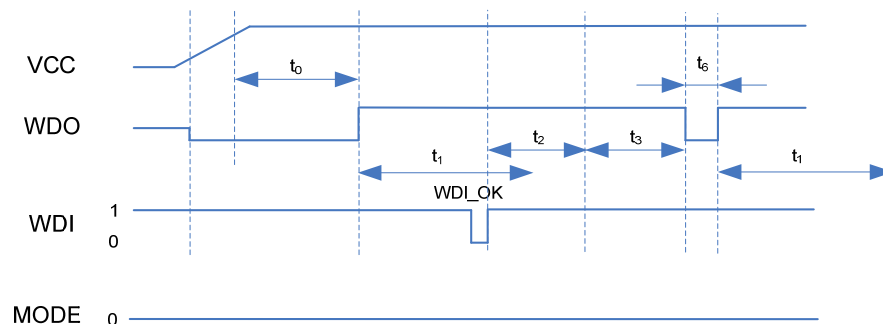


Synchronized by WDI and triggered in closed window (MODE=0, short window mode)

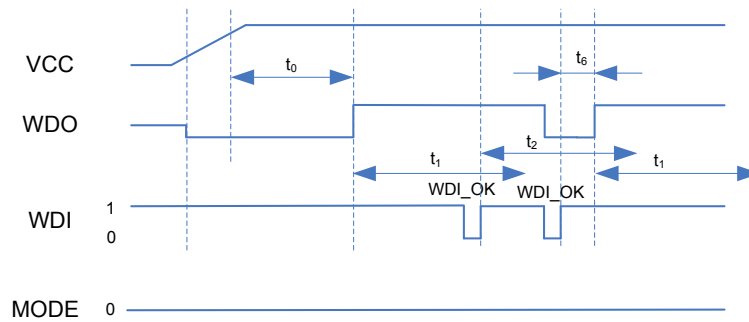


Note: When the WDI_OK rising edge that comes at WDO is low, the t_6 timer will be reset. Therefore, in the situation above, the WDO reset signal maintains a $t_6 + \text{WDI_OK}$ time.


Synchronized by WDI and triggered in open window (MODE=1, long window mode)

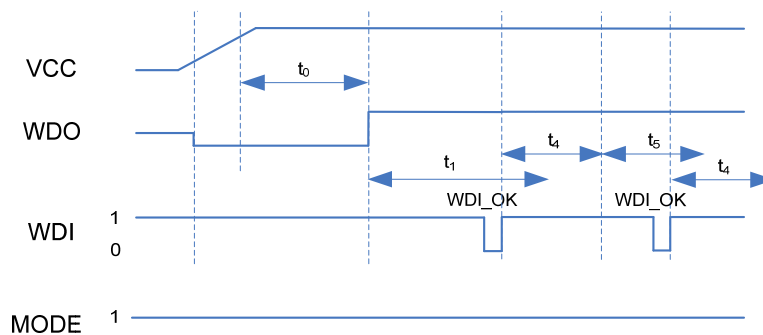

Synchronized by WDI and no trigger signal (MODE=1, long window mode)

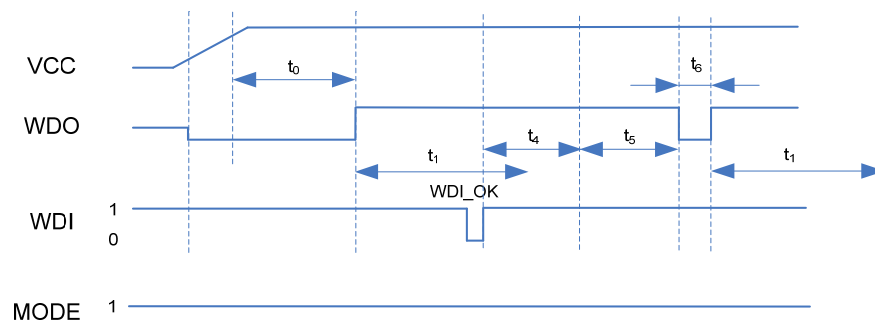


Synchronized by WDI and triggered in closed window (MODE=1, long window mode)

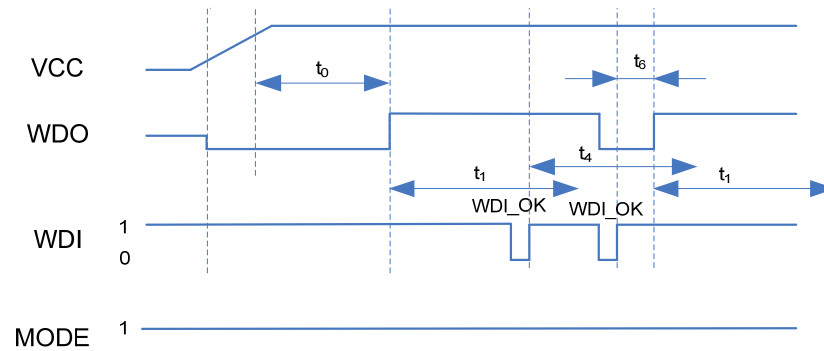

Note: When the WDI_OK rising edge that comes at WDO is low, the t_6 timer will be reset. Therefore, in the situation above, the WDO reset signal maintains a $t_6 + \text{WDI_OK}$ time.

STATE DIAGRAM

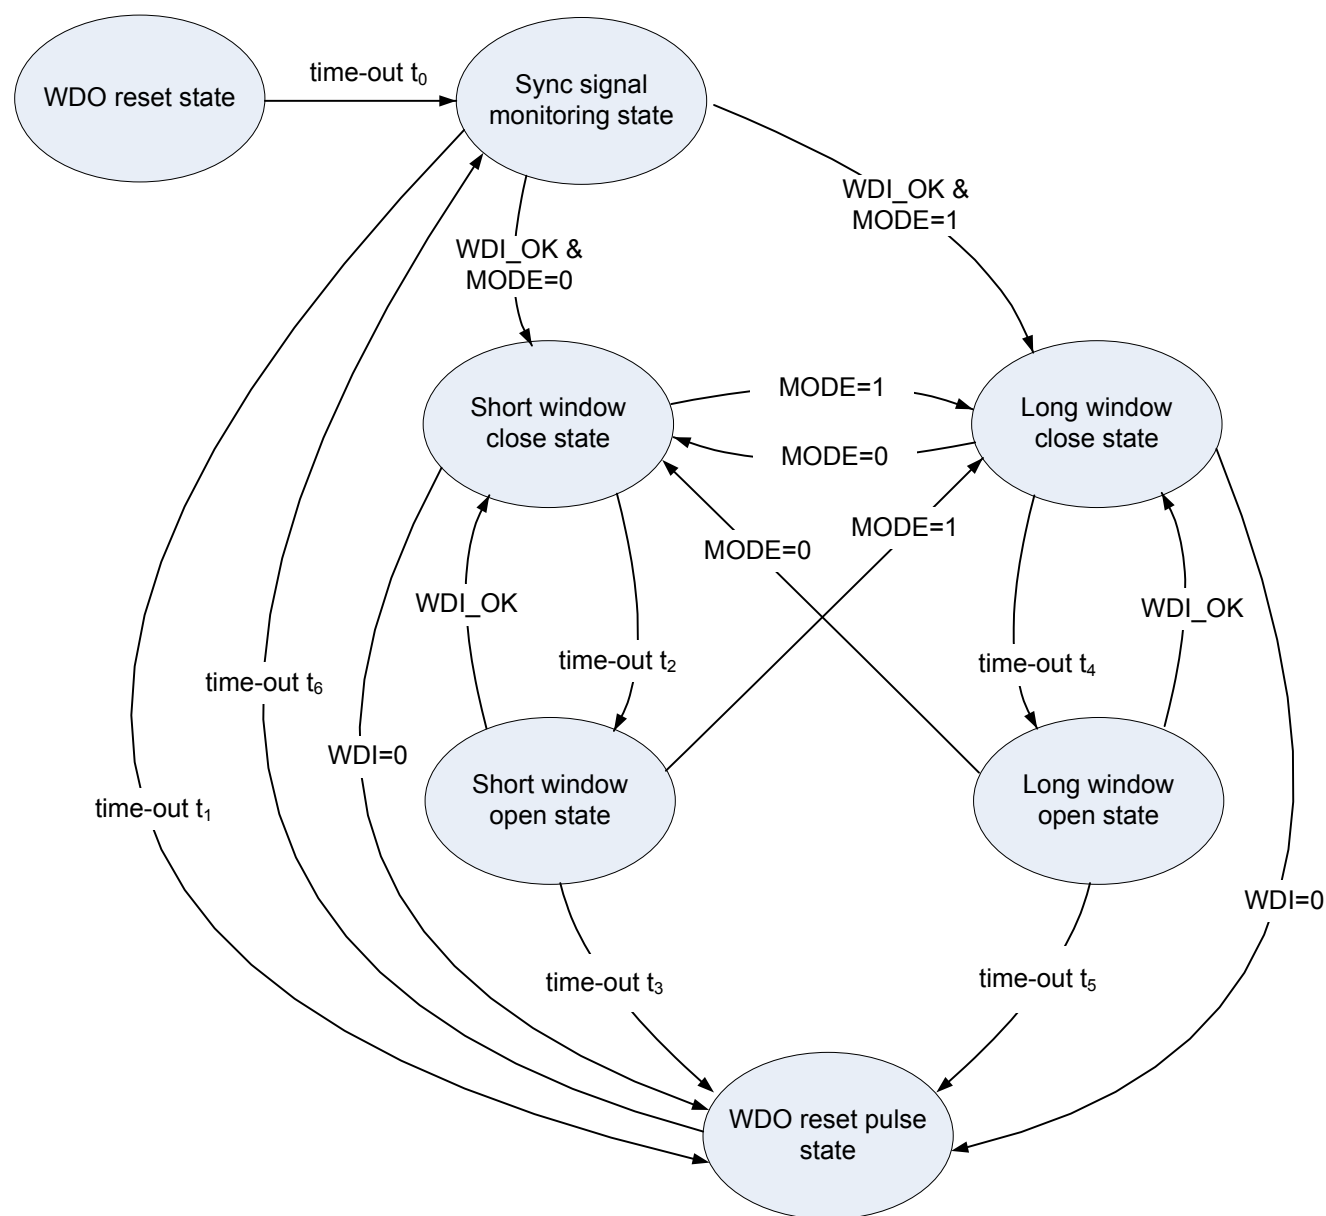

Note: The state diagram above does not include if a WDI error occurs.

OPERATION

Supply Voltage

VCC= 5V±10% is recommended for MPQ6411 /MPQ6411-AEC1 normal operation; while VCC= 3.3V±10% is recommended for MPQ6411-33/MPQ6411-33-AEC1 normal operation. WDO is pulled low when VCC rises to 1V or above. After VCC rises to 90% (typically), WDO will remain at a low level for t_0 to reset the MCU.

TIMER

Period T (μs):

$$T(\mu s) = 15.75 \times R_{\text{TIMER}}(k\Omega) + 73.5$$

$R_{\text{TIMER}}(k\Omega)$:

$$R_{\text{TIMER}}(k\Omega) = 0.063 \times T(\mu s) - 4.67$$

For example: $R_{\text{TIMER}}=51k\Omega$, $T \approx 0.88ms$

Monitor MCU Synchronization Signal

When the watchdog is in a “sync signal monitoring state,” the following will occur:

- ◆ If the watchdog IC receives a WDI_OK signal from the MCU within t_1 (WDI remains low for 10μs to 5ms), the timer will be reset, and the watchdog works in normal operation.
- ◆ If the watchdog does not receive the WDI_OK signal from the MCU during t_1 , it will generate a reset signal and go into “sync signal monitor state” again.

Short Window Mode

If the MCU and watchdog are synchronized correctly and MODE is low, the watchdog will work in short window mode:

- ◆ If WDI_OK is received in a window close state (t_2), the watchdog outputs a reset signal and goes into a sync signal monitoring state.
- ◆ If WDI_OK is received in a window open state (t_3), the watchdog goes into a window

close state. The MCU works in normal operation in this situation.

- ◆ If no WDI_OK signal is received in t_2+t_3 , the watchdog outputs a reset signal and goes into a sync signal monitoring state.
- ◆ If MODE is pulled high during short window mode, the watchdog will go into long window mode.

Long Window Mode

If the MCU and watchdog are synchronized correctly and MODE is high, the watchdog will operate in long window mode, and the following will occur:

- ◆ If WDI_OK is received in a window close state (t_4), the watchdog outputs a reset signal and goes into a sync signal monitoring state.
- ◆ If WDI_OK is received in a window open state (t_5), the watchdog goes into a window close state. The MCU works in normal operation in this situation.
- ◆ If no WDI_OK signal is received in t_4+t_5 , the watchdog outputs a reset signal and goes into a sync signal monitoring state.
- ◆ If MODE is pulled low during a long window mode, the watchdog will go into a short window mode.

Watchdog Disable


Pull /WD_DIS low to disable the watchdog; pull it high to enable the watchdog. /WD_DIS has a weak internal pull-up, so the watchdog is enabled if /WD_DIS is left open.

WDI Error


If a WDI signal remains at a low level for longer than the maximum WDI_OK pulse width, it is regarded as an error. When this error occurs, WDO is pulled down until WDI returns to a high level.

PACKAGE INFORMATION


SOIC-8

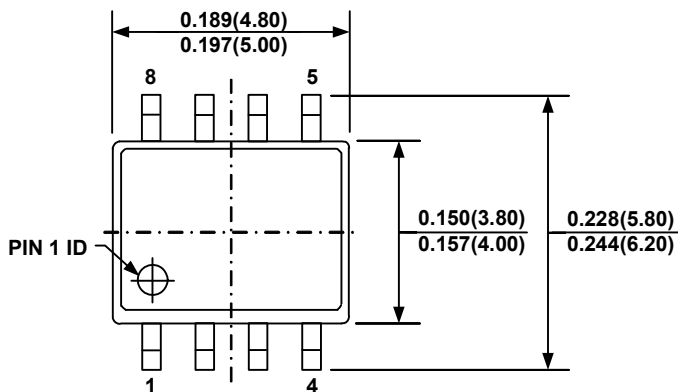


TOP VIEW

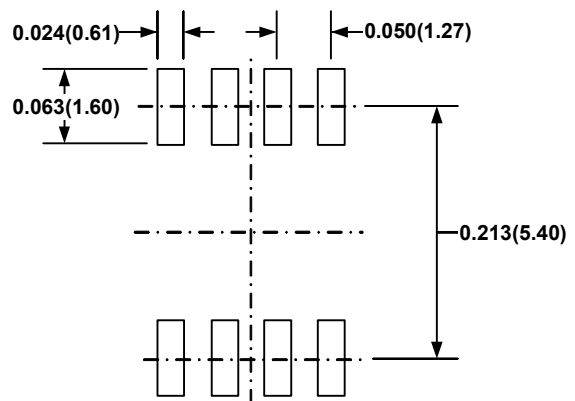


RECOMMENDED LAND PATTERN

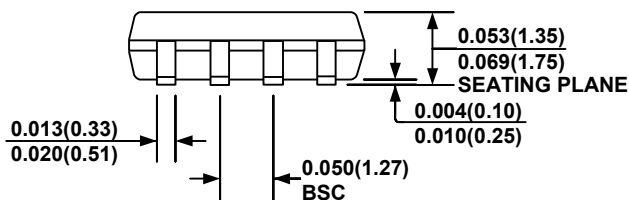

FRONT VIEW

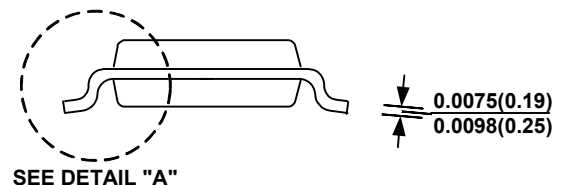

SIDE VIEW

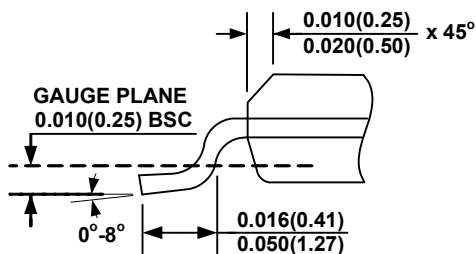

DETAIL "A"

NOTE:

- 1) CONTROL DIMENSION IS IN INCHES. DIMENSION IN BRACKET IS IN MILLIMETERS.
- 2) PACKAGE LENGTH DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
- 3) PACKAGE WIDTH DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS.
- 4) LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.004" INCHES MAX.
- 5) DRAWING CONFORMS TO JEDEC MS-012, VARIATION AA.
- 6) DRAWING IS NOT TO SCALE.

NOTICE: The information in this document is subject to change without notice. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.