



## Datasheet

### Standard Version



### Outdoor Version



#### Features

- Quick and Simple to Install
- Self Contained Transmitter
- Up to 500m Line of Sight
- Up to 100m in buildings
- Transmitter Battery CR2032 (Supplied)
- Battery Life : 5years @ 50ops/day
- Receiver Operates from 110 - 230Vac
- Standard Transmitter IP44
- Outdoor Transmitter IP66
- Receiver Weatherproof to IP68
- Supplied ready to go

#### Description


The RF Solutions' SWITCHLINK provides a quick and simple solution to a Light Switching when cabling is tricky, expensive or time consuming.

The system is supplied ready to operate, Simply apply power to the receiver unit and connect the load into the screw terminals and the transmitter Switch will operate the Receiver.

#### Ordering Information

Part Number	Description
SWITCHLINK-8S1	SWITCHLINK Standard Supplied with Tx and Rx
SWITCHLINK-8S1IP	SWITCHLINK Outdoor Supplied with Tx and Rx

## Receiver Wiring

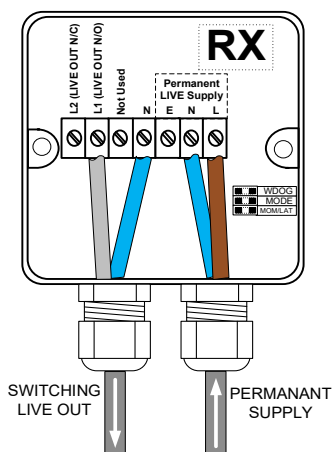

Flashes when RF Active (also indicates error mode)

Indicates that output is LIVE

When the Live Output (LOUT) is LIVE the Red LED

## Technical Information

### Transmitter

Parameter	Min	Typical	Max	Units
Supply Voltage:		3V		Vdc
Quiescent Current:		4		uA
Operating Frequency	0.045	869.50	+0.045	MHz
RF Output Power (ERP)			20	dBm

### MAINSLINK-RX Receiver

Parameter	Min	Typical	Max	Units
Supply Voltage	100	230	250	Vac
Quiescent Current:		0.1		mA
Operating Frequency		869.50		MHz
Maximum switching load (RX)			1200	W
Time delay from Tx on switch to Rx Relay operation:		25		mS

#### RF Solutions Ltd. Recycling Notice

Meets the following EC Directives:

#### DO NOT

Discard with normal waste, please recycle.

#### ROHS Directive 2011/65/EU and amendment 2015/863/EU

Specifies certain limits for hazardous substances.

#### WEEE Directive 2012/19/EU

Waste electrical & electronic equipment.

This product must be disposed of through a licensed WEEE collection point. RF Solutions Ltd., fulfills its WEEE obligations by membership of an approved compliance scheme. Environment Agency producer registration number: **WEE/JBO104WV**.



#### Waste Batteries and Accumulators Directive 2006/66/EC

Where batteries are fitted, before recycling the product, the batteries must be removed and disposed of at a licensed collection point.

RF Solutions battery producer number **BPRN00060**.

#### Disclaimer:

Whilst the information in this document is believed to be correct at the time of issue, RF Solutions Ltd does not accept any liability whatsoever for its accuracy, adequacy or completeness. No express or implied warranty or representation is given relating to the information contained in this document. RF Solutions Ltd reserves the right to make changes and improvements to the product(s) described herein without notice. Buyers and other users should determine for themselves the suitability of any such information or products for their own particular requirements or specification(s). RF Solutions Ltd shall not be liable for any loss or damage caused as a result of user's own determination of how to deploy or use RF Solutions Ltd's products. Use of RF Solutions Ltd products or components in life support and/or safety applications is not authorised except with express written approval. No licences are created, implicitly or otherwise, under any of RF Solutions Ltd's intellectual property rights. Liability for loss or damage resulting or caused by reliance on the information contained herein or from the use of the product (including liability resulting from negligence or where RF Solutions Ltd was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict RF Solutions Ltd liability for death or personal injury resulting from its negligence.