

# PI-EX-RTD-I - Signal converter



2835066

<https://www.phoenixcontact.com/us/products/2835066>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Ex i resistance thermometer input: Converts signals of Pt 100 resistance thermometers installed in the Ex zone and transfers a 4 mA ... 20 mA signal to a load in the safe zone. Freely programmable. Galvanic 3-way isolation.

## Commercial data

Item number	2835066
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	NULL
Product key	CK3821
Catalog page	Page 383 (IF-2007)
Weight per piece (including packing)	107.5 g
Weight per piece (excluding packing)	107.5 g
Customs tariff number	85437090
Country of origin	GB

## Technical data

### Notes

General	The electronics module is plugged into a basic terminal block.
---------	--

### Product properties

Product type	Temperature transmitter
Application	Temperature
No. of channels	1

### Electrical properties

No. of channels	1
Maximum transmission error	< 0.1 % (of end value 20 mA, at 0 Ω ... 400 Ω input range, 20°C)

#### Electrical isolation Input/output

Electrical isolation	250 V
----------------------	-------

#### Electrical isolation Input/power supply

Electrical isolation	250 V
----------------------	-------

#### Electrical isolation Output/supply

Test voltage	1.5 kV AC (50 Hz, 60 s)
--------------	-------------------------

### Supply

Supply voltage range	20 V DC ... 35 V DC
Max. current consumption	64 mA (24 V DC / 20 mA)
Power dissipation	1.5 W (24 V DC / 20 mA)

## Input data

### Measurement

Description of the input	Intrinsically safe
Configurable/programmable	Freely programmable, configured
Sensor types (RTD) that can be used	2 or 3-conductor Pt 100 sensors as well as resistance-type sensors
Temperature measuring range	-200 °C ... 850 °C (Range depending on the sensor type)
Sensor type:	-200 °C ... 850 °C
Connection technology	2-, 3-conductor
Linear resistance measuring range	0 Ω ... 400 Ω (Minimum measuring range 10 Ω)
Measuring accuracy	±80 mΩ

## Output data

### Signal

Output description	Current output
Current output signal	4 mA ... 20 mA
Load/output load current output	≤ 600 Ω

Behavior in the event of a sensor error	upscale, downscale or off, LED flashes
Measuring accuracy	$\pm 11 \mu\text{A}$

## Connection data

Conductor cross section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 14
Tightening torque	0.5 Nm ... 0.6 Nm

## Ex data


### Safety data

Max. output voltage $U_o$	6.6 V
Max. output current $I_o$	27 mA
Max. output power $P_o$	50 mW
Safety-related maximum voltage $U_m$	250 V AC
IIB: Max. external inductivity $L_o$ / Max. external capacitance $C_o$	178.4 mH / 500 $\mu\text{F}$
IIC: Max. external inductivity $L_o$ / Max. external capacitance $C_o$	48.7 mH / 22 $\mu\text{F}$

## Signaling

Status display	Green LED, for power supply, flashes in the case of sensor defect
----------------	---

## Dimensions

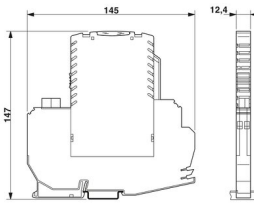Dimensional drawing	
Width	12.4 mm
Height	145 mm
Depth	147 mm

## Material specifications

Flammability rating according to UL 94	V0
Housing material	PBT and polyamide PA non-reinforced

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 55 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

# PI-EX-RTD-I - Signal converter

2835066

<https://www.phoenixcontact.com/us/products/2835066>



## Approvals

CE	
Certificate	CE-compliant
ATEX	
Identification	II (1) GD [EEEx ia] IIC
UL, USA/Canada	
Identification	cULus

# PI-EX-RTD-I - Signal converter


2835066

<https://www.phoenixcontact.com/us/products/2835066>



## Drawings

Block diagram

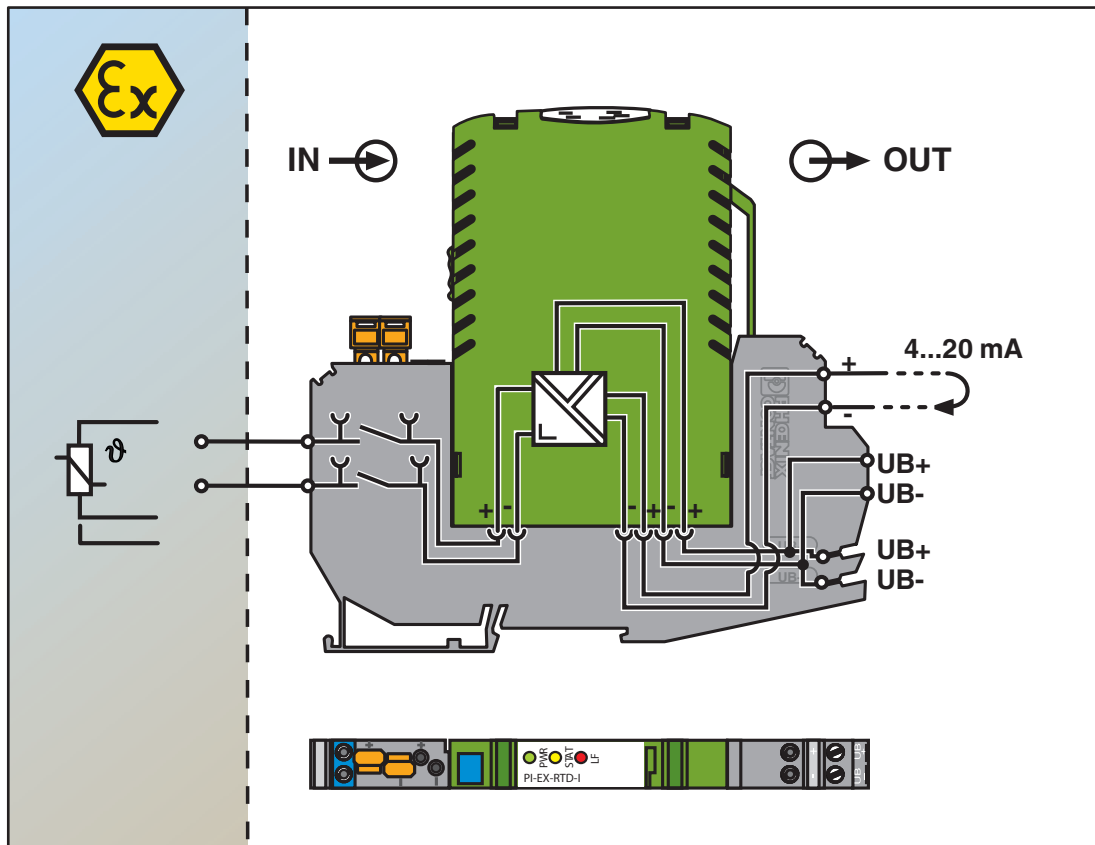


# PI-EX-RTD-I - Signal converter

2835066

<https://www.phoenixcontact.com/us/products/2835066>



Dimensional drawing

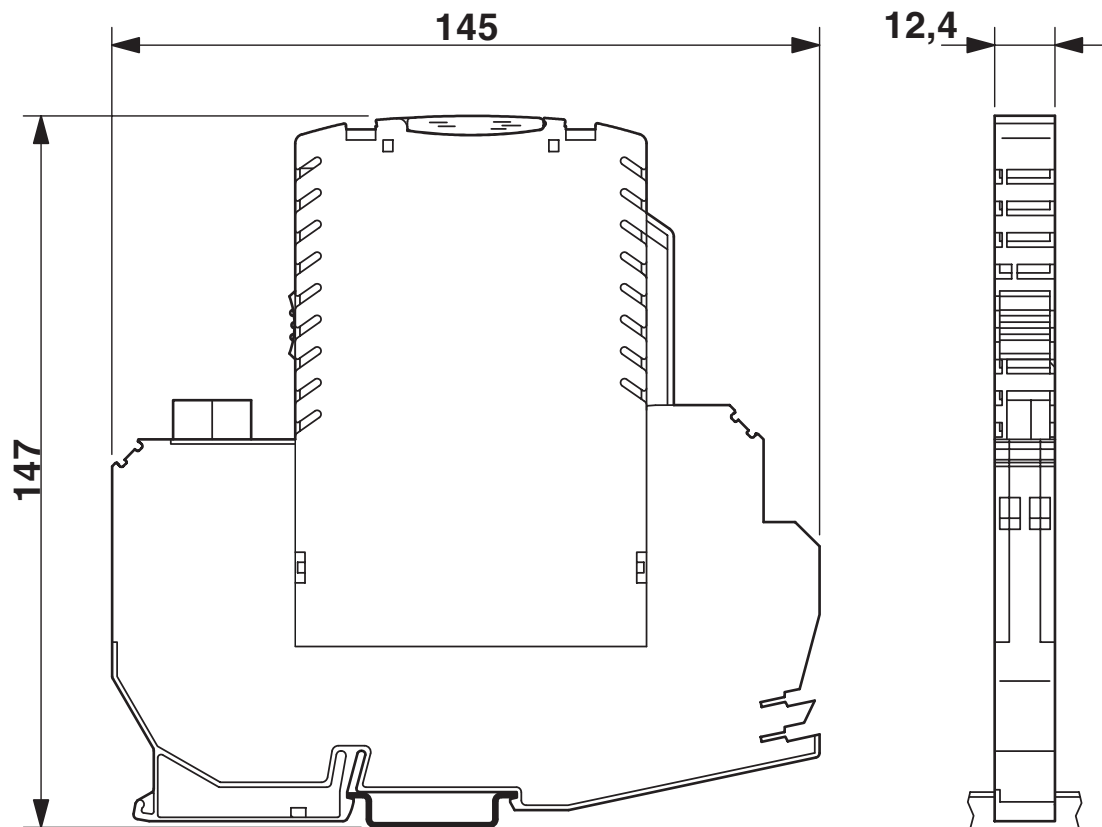

# PI-EX-RTD-I - Signal converter

2835066

<https://www.phoenixcontact.com/us/products/2835066>



## Classifications

### ECLASS

ECLASS-11.0	27210129
-------------	----------

# PI-EX-RTD-I - Signal converter

2835066

<https://www.phoenixcontact.com/us/products/2835066>



## Accessories

### TT-PI-EX-TB - Surge protection device

2858386

<https://www.phoenixcontact.com/us/products/2858386>



Intrinsically safe basic terminal block with isolating connector, test connections and surge protection, for mounting on NS 35/7.5

---

### PI-EX-ES-1/3 - Basic terminal block

2835325

<https://www.phoenixcontact.com/us/products/2835325>



Ex basic terminal block, with three terminal points to the field level (Ex area)

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)