



## 2 dBi Ground Independent Tunable Poly Spring Vehicular Antenna 380-520 MHz NMO Mount Connector

### Antennas Technical Data Sheet

PE51MP1005

#### Features

- 1/2 Wave ground independent wide band antenna
- NMO Mount, Black Chrome Finish
- Flexible Black Polymer Alloy Spring
- Broad Band
- O-ring seal for waterproof construction
- Durable Xenoy™ base with TPB over mold dust seal and grip ring

#### Applications

- Service Vehicles
- Public safety
- Public Transportation
- Mining & Construction

#### Description

This ground plane independent UHF mobile omnidirectional antenna is ideally suited for multipoint mobile applications including service vehicles, public transportation, public safety, mining and construction vehicles, as well numerous other commercial and industrial applications where mobility and wide coverage is desired. This antenna features a flexible Poly Spring base. Unlike the traditional metal spring base, the Poly Spring will not corrode and does not generate electrical noise when flexed during use. It has a standard TAD/NMO Motorola-type mobile base.

#### Configuration

Design	Vehicular
Application Band	UHF
Band Type	Single
Radiation Pattern	Omni Directional
Wavelength	Half Wave
Polarization	Linear, Vertical
Ground Plane	Independent
Connector Type	NMO Mount

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range (Tunable Range)	380		520	MHz
Operational Bandwidth		50		MHz
Input VSWR (across operational bandwidth)			2:1	
Impedance		50		Ohms
Gain		2		dBi
Horizontal (Azimuth) Beam Width		Omnidirectional		
Vertical (Elevation) Beam Width		70		Degrees
Input Power			150	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 dBi Ground Independent Tunable Poly Spring Vehicular Antenna 380-520 MHz NMO Mount Connector PE51MP1005](#)



2 dBi Ground Independent Tunable Poly Spring Vehicular  
Antenna 380-520 MHz NMO Mount Connector

Antennas Technical Data Sheet

PE51MP1005

**Mechanical Specifications**

Base Material	Xenoy™ w/TPV over mold grip
Whip Material	17-7 SS
Whip Finish	Black Chrome
Mounting Application	¾ inch thru-hole NMO Mount
Spring Material	Black Molded Polymer Alloy

**Size**

Overall Length	16.13 in [409.7 mm]
----------------	---------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 dBi Ground Independent Tunable Poly Spring Vehicular Antenna 380-520 MHz NMO Mount Connector PE51MP1005](#)



**Installation Instructions**

PE51MP1005

**UHF GROUND PLANE INDEPENDENT ANTENNA  
(380-520 MHz)**

*Congratulations on your selection of another quality antenna product from Pasternack.*

*Pasternack is committed to continually provide the greatest antenna VALUE for your wireless applications.*

**1. Parts (Figure 1):**

Verify all parts are included with the Antenna as shown in Figure 1.

- A. Antenna Whip
- B. e/m-Flex™ Poly Spring Assembly
- C. NMO Base Adapter
- D. O-Ring

**2. Tools/Materials Required:**

- A. Tool for cutting stainless steel whip
- B. Hex Wrench
- C. **Note:** Special tools are not required to install the antenna. The antenna is intended to be installed using a firm hand torque until the sealing O-ring is completely compressed against the installation surface.

**3. Pre-Installation Checklist and Tips:**

- A. **Optimal VSWR and Bandwidth:** Best performance is achieved when mounted to a non-metallic surface or small metal L-Bracket.
- B. **Mounting Option:** Metallic ground plane surface.
- C. Ensure O-ring is properly seated within O-ring groove as shown in figure 2.
- D. **Important:** Verify proper operational frequency. (Figure 2).
- E. Read and follow all Whip Cutting Instructions supplied for this model.

**4. Tuning and Installation (Figure 3):**

- A. Verify contact spring is completely extended. If necessary, adjust by pulling the contact upward.
- B. Thread NMO Base Adapter onto the NMO mount. Tighten by hand until O-Ring is completely seated.
- C. Thread Spring onto NMO Base Adapter. Firmly torque by hand.
- D. Refer to whip cutting instructions. Cut whip according to frequency and ground plane or no ground plane installation.
- E. Verify VSWR. Apply firm torque to whip adapter set screws. (2 ea)

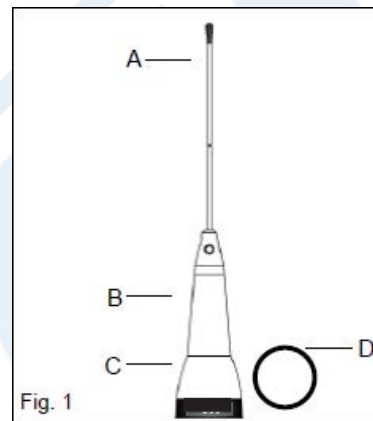


Fig. 1



Fig. 2



Fig. 3

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 dBi Ground Independent Tunable Poly Spring Vehicular Antenna 380-520 MHz NMO Mount Connector PE51MP1005](#)



**WHIP CUTTING INSTRUCTIONS FOR TUNING PE51MP1005**  
 “Ground Plane” and “No Ground Plane” Installations  
 PLEASE CAREFULLY READ ALL INSTRUCTIONS BEFORE CUTTING THE WHIP

FREQUENCY BAND (MHz)	TUNED WHIP LENGTH "W" NO GROUND PLANE		TUNED WHIP LENGTH "W" GROUND PLANE	
	(inches)	(mm)	(inches)	(mm)
380 - 430	6-13/16	172	6-3/4	170
400 - 450	6-1/4	159	6-1/4	159
440 - 490	5-5/8	141	5-5/8	141
470 - 520	4-5/8	116	4-5/8	116

Table 1


1. **IMPORTANT! Before Cutting**

**OPTIMAL BANDWIDTH PERFORMANCE:** This antenna is specifically designed for optimal performance, operating across a 50 MHz (or greater) bandwidth for each cut length specified in Table 1. VSWR may vary slightly depending on the actual installation surface material, location, bracket type and size.

**Cutting NOTE:** The whip can be cut using a grinding wheel or shearing tool designed for this purpose. Due to a large variation of installations without a conductive ground plane surface, it is strongly recommended to cut the whip slightly longer than the specified dimensions in Table 1. If necessary, continue to trim for best VSWR match. Always verify actual VSWR or Return Loss performance after cutting and installation.

**TUNED LENGTH "W"** is determined by measuring the distance between the top of the whip adapter and the top of the whip. See Figure 4. **NOTE: The actual cut length will be approximately 1" (25mm) longer than TUNED WHIP LENGTH "W".**

- Choose the column in Table 1 for “Ground Plane” or “No Ground Plane” installation.
- Identify the desired center frequency ( $F_c$ ) of operation.
- Choose the **FREQUENCY BAND** from the left column in Table 1 that provides the best frequency band centering of  $F_c$ .
- Imperial and Metric units are given for convenience. Cut the whip as required to establish the specified **TUNED WHIP LENGTH "W"** as shown in Figure 4. Verify VSWR. Secure set screws (2 ea.).

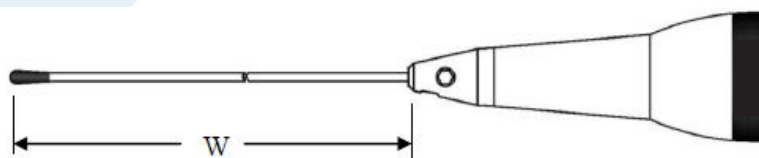

[Note: Add 1" (25mm) to Tuned Length "W" when cutting whip.] Fig. 4

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: [2 dBi Ground Independent Tunable Poly Spring Vehicular Antenna 380-520 MHz NMO Mount Connector PE51MP1005](#)



2 dBi Ground Independent Tunable Poly Spring Vehicular Antenna 380-520 MHz NMO Mount Connector

Antennas Technical Data Sheet

PE51MP1005

**Environmental Specifications**

**Temperature**

Operating Range

-40 to +85 deg C

Humidity

95%

Corrosion



Salt Fog

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

**Typical Radiation Pattern**

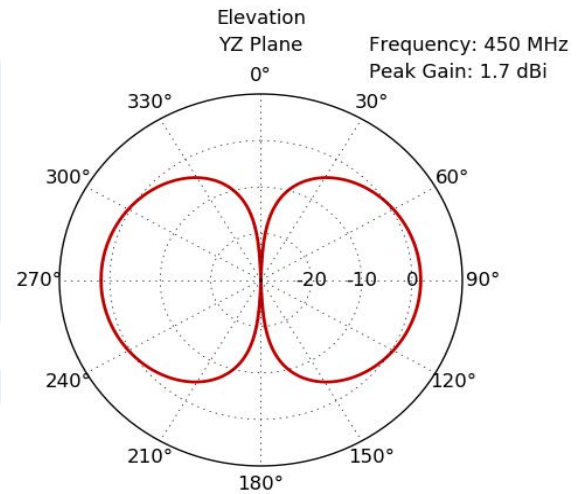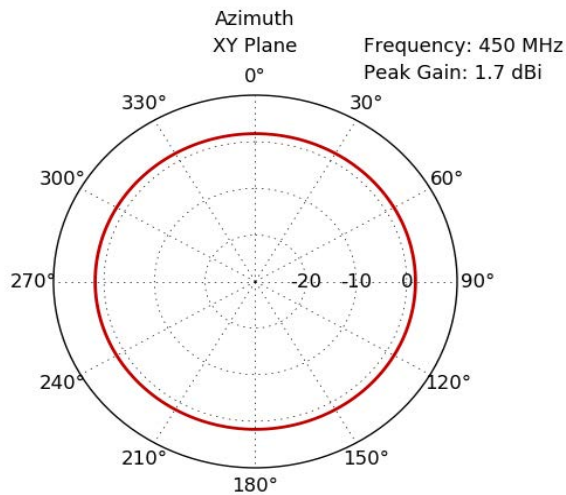

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 dBi Ground Independent Tunable Poly Spring Vehicular Antenna 380-520 MHz NMO Mount Connector PE51MP1005](#)



## 2 dBi Ground Independent Tunable Poly Spring Vehicular Antenna 380-520 MHz NMO Mount Connector

### Antennas Technical Data Sheet

PE51MP1005

2 dBi Ground Independent Tunable Poly Spring Vehicular Antenna 380-520 MHz NMO Mount Connector from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 dBi Ground Independent Tunable Poly Spring Vehicular Antenna 380-520 MHz NMO Mount Connector PE51MP1005](https://www.pasternack.com/single-antenna-380-520-mhz-2-dbi-gain-nmo-mount-pe51mp1005-p.aspx)


URL: <https://www.pasternack.com/single-antenna-380-520-mhz-2-dbi-gain-nmo-mount-pe51mp1005-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE51MP1005 CAD Drawing

2 dBi Ground Independent Tunable Poly Spring Vehicular  
Antenna 380-520 MHz NMO Mount Connector

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/18/2019	MMILLER

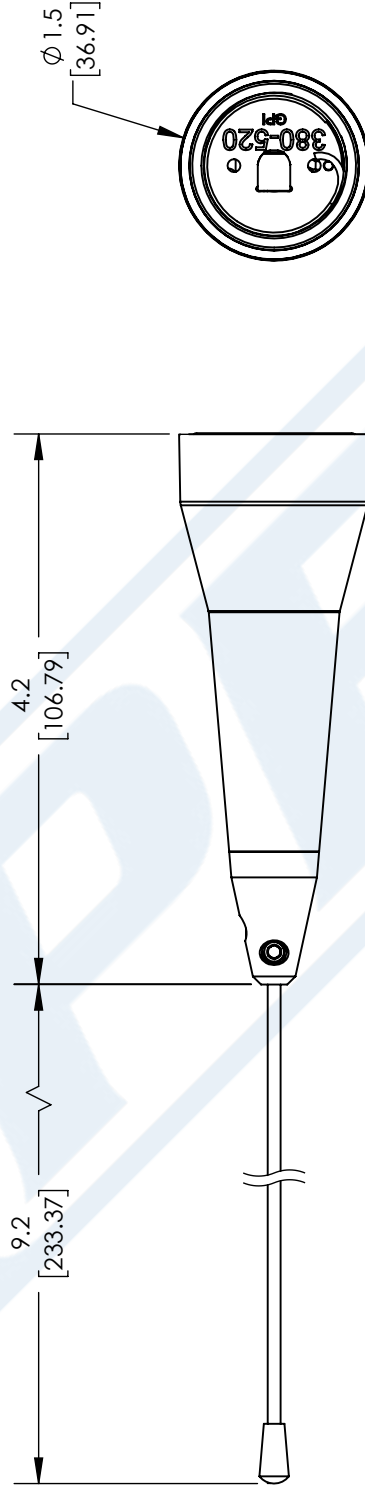

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
X±.2 [5.08] FRACTIONS ±1/32  
XX±.01 [.25] ANGLES ±1°  
XXX±.005 [.13]

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.

THIRD-ANGLE PROJECTION

**(PE) PASTERNAK**  
an INFINITO brand

Pasternack Enterprises, Inc.  
P. O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
www.pasternack.com | e-mail: sales@pasternack.com

SIZE [CAGE] DRAWN BY [PART NUMBER]  
A 53919 BPUCHASKI PE51MP1005

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1  
SCALE N/A  
REV A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.