Technical Data Sheet



SP3T Terminated Ramses SMA 3GHz Latching Self-cut-off Auto-reset Indicators 12Vdc TTL Diodes D-sub connector

PAGE 1/2 ISSUE 22-03-22 SERIE : SPnT PART NUMBER : R574392325

RF CHARACTERISTICS

Number of ways : 3

Frequency range : 0 - 3 GHz Impedance : 50 Ohms

Frequency (GHz)	DC - 3
VSWR max	1,20
Insertion loss max	0.20 dB
Isolation min	80 dB
Average power (*)	240 W

TERMINATION IMPEDANCE : 50 Ohms

TERM. AVG. POWER AT 25° C : 1 W per termination / 3 W total power

ELECTRICAL CHARACTERISTICS

Actuator : LATCHING
Nominal current ** : 640 mA

Actuator voltage (Vcc) : 12V (10.2 to 13V)

Terminals : 25 pins D-SUB male connector

Indicator rating : 1 W / 30 V / 100 mASelf cut-off time : 40 ms < CT < 120 ms

TTL inputs (E) - High level : 2.2 to 5.5 V / 800μA at 5.5 V

- Low level : 0 to 0.8 V / 20μA at 0.8 V

MECHANICAL CHARACTERISTICS

Connectors : SMA female per MIL-C 39012 Life : 2 million cycles per position

Switching Time*** : < 40 msConstruction : Splashproof
Weight : < 250 g

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C
Storage temperature range : -55°C to +85°C

(* Average power at 25°C per RF Path)

(** At 25° C ±10%)

(*** Nominal voltage; 25° C)









SP3T Terminated Ramses SMA 3GHz Latching Self-cut-off Auto-reset Indicators 12Vdc TTL Diodes D-sub connector

PAGE 2/2 ISSUE 22-03-22 SERIE : SPnT PART NUMBER : R574392325


DRAWING



TTL input	RF Continuity	Ind.
E1 = 1	$IN \leftrightarrow 1$	D.E
E2 = 1	$IN \leftrightarrow 2$	D.F
E3 = 1	$IN \leftrightarrow 3$	D.G




LABEL



RADIALL® R574392325 0 - 3 GHz Un : 12V Lot : _ _ _



SCHEMATIC DIAGRAM

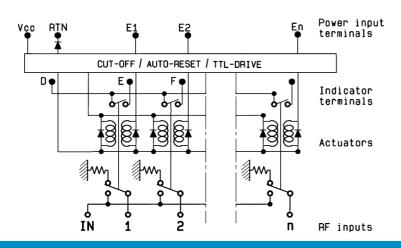

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.