



# TES-3082GT-M12-BP1

**EN50155 10-port managed Ethernet switch with 8x10/100Base-T(X) and 2x10/100/1000Base-T(X), M12 connector and 1xbypass included**

## Features

- Leading EN50155-compliant Ethernet switch for rolling stock application
- World's fastest Redundant Ethernet Ring: **O-Ring** (recovery time < 10ms over 250 units of connection)
- **Open-Ring** support the other vendor's ring technology in open architecture
- STP/RSTP/MSTP supported
- Support **PTP Client** (Precision Time Protocol) clock synchronization
- IGMP v2/v3 (IGMP snooping support) for filtering multicast traffic
- SNMP v1/v2c/v3 support for secured network management
- RMON for traffic monitoring
- Support VLAN and LLDP protocol
- DHCP assign each Equipment IP by each Port
- Provided Relay bypass function with two gigabit ports
- Event notification through Syslog, Email, SNMP trap, and Relay Output
- Windows utility (**Open-Vision**) support centralized management and configurable by Web-based ,Telnet, and Console (CLI)
- M12 connectors to guarantee reliable operation against environmental disturbances
- Wall mounting enabled




## Introduction

ORing's Transporter™ series managed Ethernet switches are designed for industrial applications, such as rolling stock, vehicle, and railway applications. The TES-3082GT-M12-BP1 is a managed Redundant Ring Ethernet switch with 8x10/100Base-T(X) and 2x10/100/1000Base-T(X) ports which is specifically designed for the toughest and fully compliant with EN50155 requirement. With completely support of Ethernet Redundancy protocol, O-Ring (recovery time < 10ms over 250 units of connection), Open-Ring, O-Chain and MSTP/RSTP/STP (IEEE 802.1s/w/D) can protect your mission-critical applications from network interruptions or temporary malfunctions with its fast recovery technology. Another Open-Ring technology is also supported which can applied for other vendor's proprietary ring. TES-3082GT-M12-BP1 EN50155 Ethernet switch use M12 connectors to ensure tight, robust connections, and guarantee reliable operation against environmental disturbances, such as vibration and shock. TES-3082GT-M12-BP1 can be managed centralized and convenient by a powerful windows utility ~ Open-Vision. In addition, the wide operating temperature range from -40 °C to 70°C can satisfy most of operating environment. Therefore, the switch is one of the most reliable choices for rolling stock and highly-managed Ethernet application.


## Open-Vision

ORing's switches are intelligent switches. Different from other traditional redundant switches, ORing provides a set of Windows utility (Open-Vision) for user to manage and monitor all of industrial Ethernet switches on the industrial network.


### Railway Application

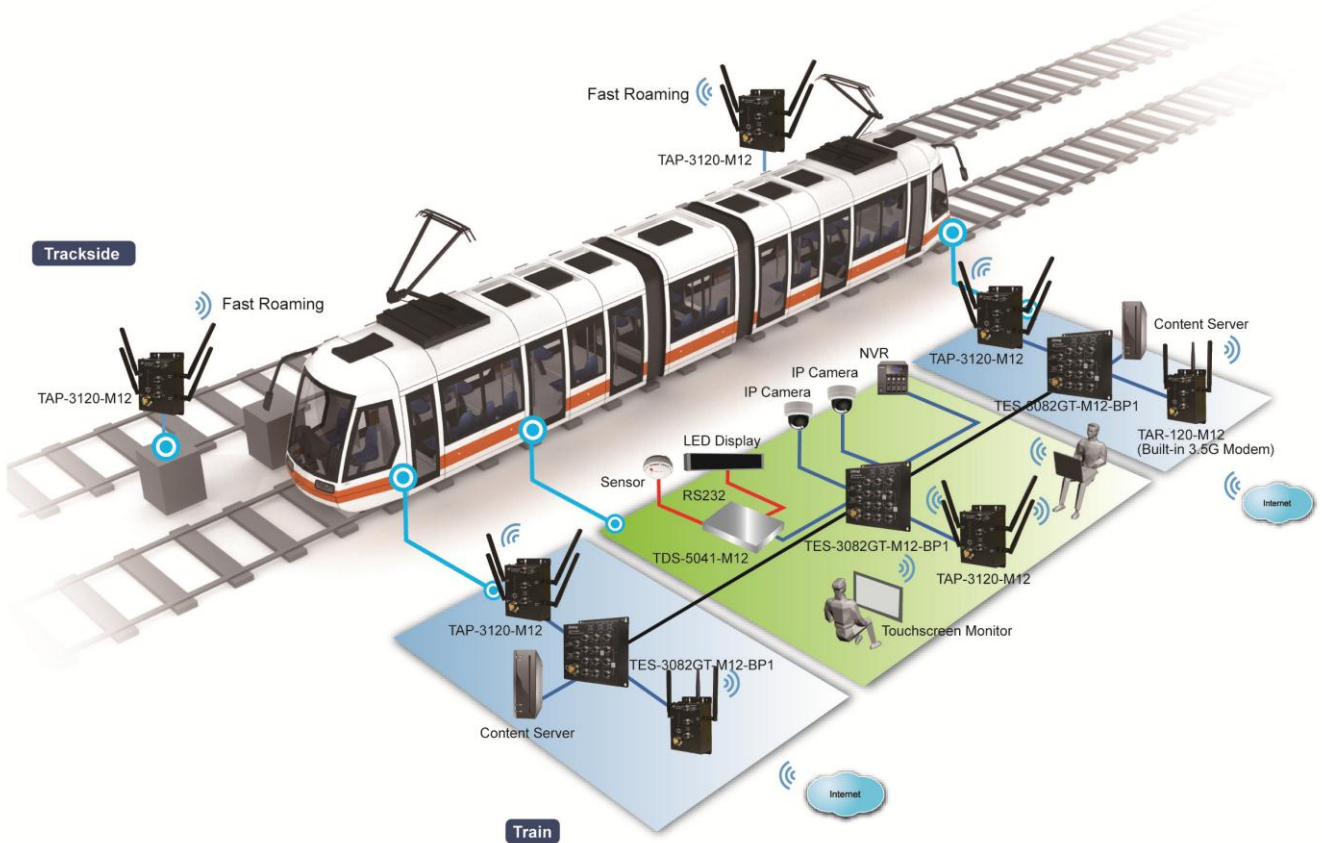

Network connection

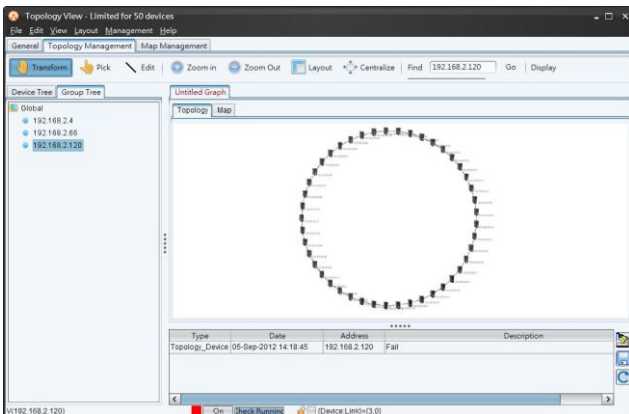


Topology View

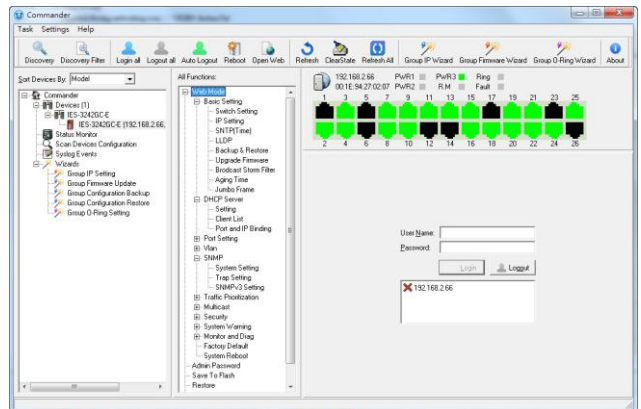

Monitoring and Configuration interface

## Dimension

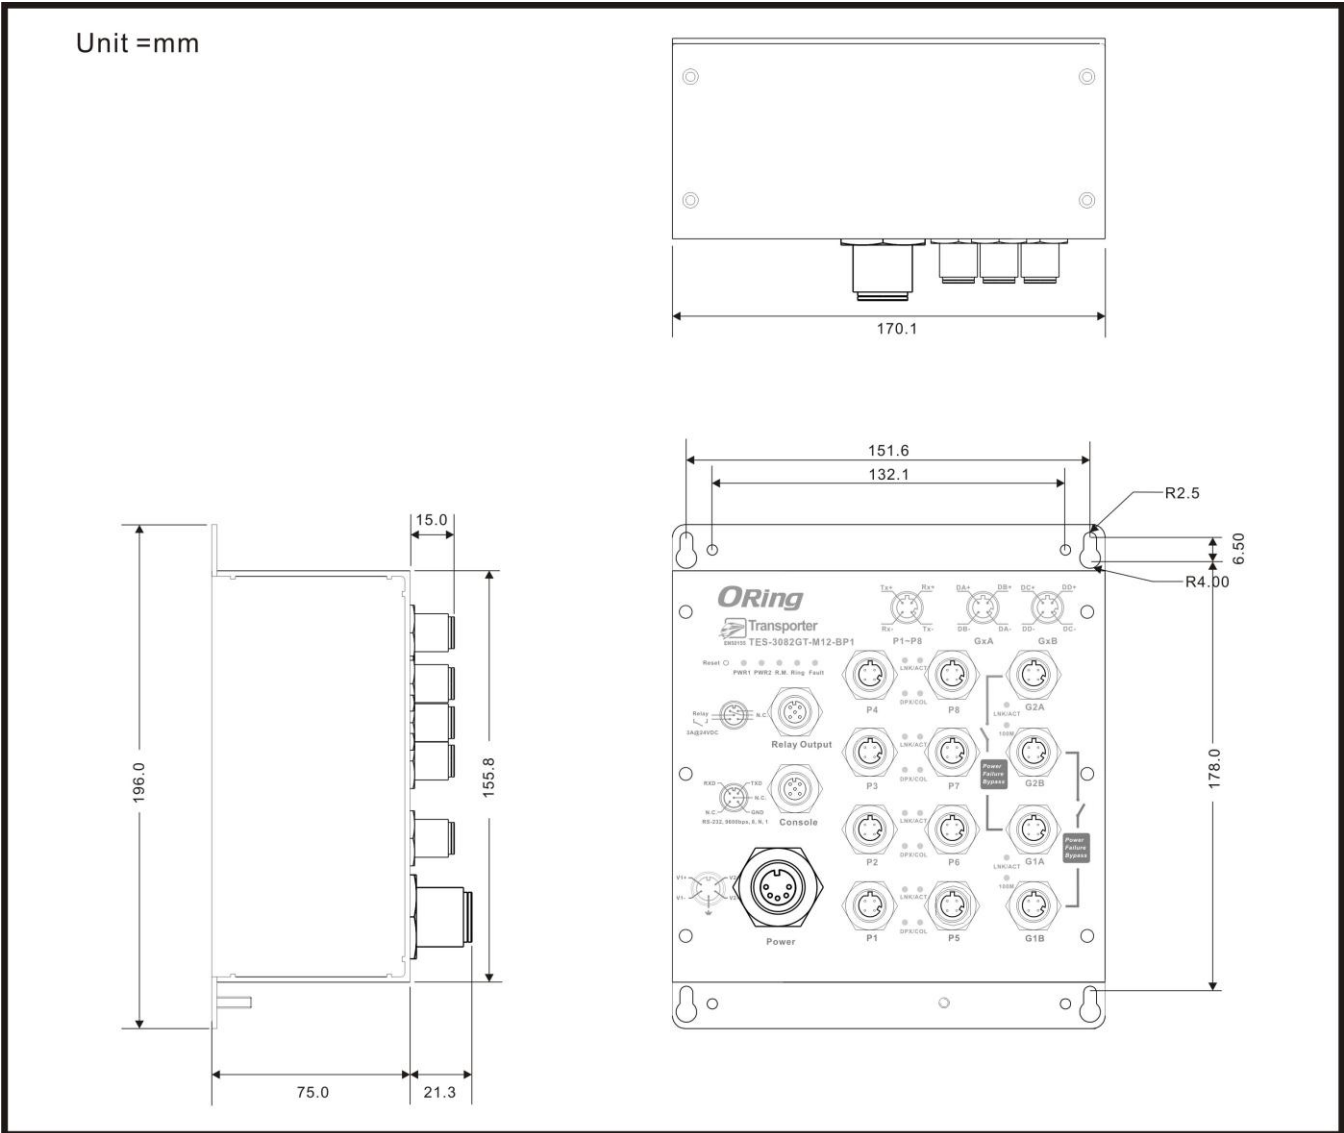

## Specifications


<b>ORing Switch Model</b>	<b>TES-3082GT-M12-BP1</b>
<b>Physical Ports</b>	
10/100 Base-T(X) Ports in M12 Auto MDI/MDIX	<b>8 x M12 connector (4-pin D-coding)</b>
10/100/1000Base-T(X) ports in M12	<b>2 x (combinig 2 x M12 connectors 4-pin D-coding for 1 Gigabit port)</b>
RS-232 Serial Console Port	RS-232 in M12 connector (A-coding). Baud rate setting: 9600bps, 8, N, 1
<b>Technology</b>	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control

	<p>IEEE 802.3ad for LACP (Link Aggregation Control Protocol )</p> <p>IEEE 802.1D for STP (Spanning Tree Protocol)</p> <p>IEEE 802.1p for COS (Class of Service)</p> <p>IEEE 802.1Q for VLAN Tagging</p> <p>IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol)</p> <p>IEEE 802.1s for MSTP (Multiple Spanning Tree Protocol)</p> <p>IEEE 802.1x for Authentication</p> <p>IEEE 802.1AB for LLDP (Link Layer Discovery Protocol)</p>
MAC Table	8192 MAC addresses
Priority Queues	4
Processing	Store-and-Forward
Switch Properties	<p>Switching latency: 7 us</p> <p>Switching bandwidth: 5.6Gbps</p> <p>Max. Number of Available VLANs: 4096</p> <p>IGMP multicast groups: 1024</p> <p>Port rate limiting: User Define</p>
Security Features	<p>Enable/disable ports, MAC based port security</p> <p>Port based network access control (802.1x)</p> <p>VLAN (802.1Q ) to segregate and secure network traffic</p> <p>Supports Q-in-Q VLAN for performance &amp; security to expand the VLAN space</p> <p>Radius centralized password management</p> <p>SNMP v1/v2c/v3 encrypted authentication and access security</p>
Software Features	<p>STP/RSTP/MSTP (IEEE 802.1D/w/s)</p> <p>Redundant Ring (O-Ring) with recovery time less than 10ms over 250 units</p> <p>TOS/Diffserv supported</p> <p>Quality of Service (802.1p) for real-time traffic</p> <p>VLAN (802.1Q) with VLAN tagging and GVRP supported</p> <p>IGMP Snooping for multicast filtering</p> <p>Port configuration, status, statistics, monitoring, security</p> <p>SNTP for synchronizing of clocks over network</p> <p>Support <b>PTP Client</b> (Precision Time Protocol) clock synchronization</p> <p>DHCP Server / Client support</p> <p>Port Trunk support</p> <p>MVR (Multicast VLAN Registration) support</p> <p>Modbus TCP</p>
Network Redundancy	<p>O-Ring</p> <p>Open-Ring</p> <p>O-Chain</p> <p>MRP</p> <p>STP/RSTP/MSTP</p>
Warning / Monitoring System	<p>Relay output for fault event alarming</p> <p>Syslog server / client to record and view events</p> <p>Include SMTP for event warning notification via email</p> <p>Event selection support</p>
<b>LED Indicators</b>	
Power Indicator	Green : Power LED x 2
R.M. Indicator	Green : Indicate system operated in O-Ring Master mode
O-Ring Indicator	Green : Indicate system operated in O-Ring mode
Fault Indicator	Amber : Indicate unexpected event occurred
10/100Base-T(X) M12 PoE Port Indicator	Green for port Link/Act. Amber for Collision/Duplex indicator.
10/100/1000Base-T(X) M12 Port Indicator	Green for Link/Act. Amber for 100Mbps indicator
<b>Fault contact</b>	
Relay	Relay output to carry capacity of 3A at 24VDC on M12 connector (5-pin A-coding)
<b>Power</b>	
Redundant Input Power	Dual DC inputs. 12~48VDC on 5-pin M23 connector
Power Consumption (Typ.)	11 Watts
Overload Current Protection	Present
Reverse Polarity Protection	Not Presented
<b>Physical Characteristic</b>	

Enclosure	IP-40
Dimension (W x D x H)	170 (W) x 75 (D) x196 (H) mm
Weight (g)	1338 g
<b>Environmental</b>	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 70°C (-40 to 158°F)
Operating Humidity	5% to 95% Non-condensing
<b>Regulatory approvals</b>	
EMI	FCC Part 15, CISPR (EN55022) class A, EN50155 (EN50121-3-2, EN55011, EN50121-4)
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6
Safety	EN60950-1
<b>Warranty</b>	5 years

## Ordering Information

**TES-3AABCC-M12-BP1**

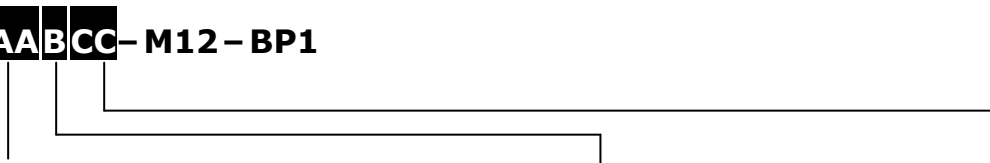

Code Definition	10/100Base-T(X) Port Number	Additional Port Number	Additional Port Number
Option	- 08: 8 ports	- 2: 2 ports	- GT: 10/100/1000Base-T(X) port

Available Model	Model Name	Description
	TES-3082GT-M12-BP1	EN50155 10-port managed Ethernet switch with 8x10/100Base-T(X) and 2x10/100/1000Base-T(X), M12 connector and 1xbypass included

## Packing List

- TES-3082GT-M12-BP1 x 1
- ORing Tool CD x 1
- Quick Installation Guide x 1

## Optional Accessories

- Open-Vision M500 : Powerful Network Management Windows utility Suit, 500 IP devices
- DR-120 series : 120 Watts DIN-Rail power supply
- M12C : M12 cable accessories
- DR-45 series : 45 Watts DIN-Rail power supply
- DR-75 series : 75 Watts DIN-Rail power supply
- Console cable