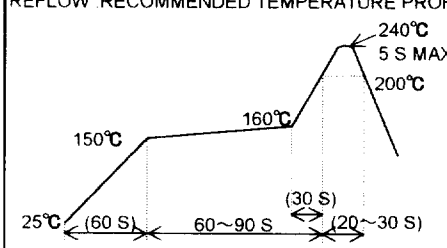


| COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE | COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE |
|-------|--------------------------|----|------|------|-------|--------------------------|----|------|------|
| △ | | | | | △ | | | | |
| △ | | | | | △ | | | | |

| | | | |
|-----------------------------|-----------------------------|-----------------|---|
| APPLICATION STANDARD | | | |
| RATING | OPERATING TEMPERATURE RANGE | -55 °C TO 85 °C | STORAGE TEMPERATURE RANGE |
| | VOLTAGE | AC 50 V | OPERATING HUMIDITY RANGE |
| | CURRENT | 0.3 A | RELATIVE HUMIDITY : 95 % MAX (NO DEW CONDENSATION IS PERMITTED) |

| | | | |
|--------------------------------------|--|---|-------|
| SPECIFICATIONS | | | |
| ITEM | TEST METHOD | REQUIREMENT | QT AT |
| CONSTRUCTION | | | |
| GENERAL EXAMINATION | VISUALLY AND BY MEASURING INSTRUMENT. | ACCORDING TO DRAWING | X X |
| MARKING | CONFIRMED VISUALLY. | | X X |
| ELECTRICAL CHARACTERISTICS | | | |
| CONTACT RESISTANCE | 100 mA (DC OR 1000 Hz). | 60 mΩ MAX. | X X |
| INSULATION RESISTANCE | 100 V DC. | 100 MΩ MIN. | X - |
| VOLTAGE PROOF | 150 V AC FOR 1 min. | NO FLASHOVER OR BREAKDOWN. | X X |
| MECHANICAL CHARACTERISTICS | | | |
| INSERTION AND WITHDRAWAL FORCES | MEASURED BY APPLICABLE CONNECTOR. | INSERTION FORCE: 84 N MAX WITHDRAWAL FORCE: 3.5 N MIN. | X - |
| MECHANICAL OPERATION | 50 TIMES INSERTION AND EXTRACTIONS. | 1) CONTACT RESISTANCE: 70 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART. | X - |
| VIBRATION | FREQUENCY: 10 TO 55 Hz, SINGLE AMPLITUDE: 0.75 mm, — m/s ² AT 10 CYCLES FOR 3 DIRECTIONS. | 1) NO ELECTRICAL DISCONTINUITY OF 1 μs MIN. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART. | X - |
| SHOCK | 490 m/s ² DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS. | | X - |
| ENVIRONMENTAL CHARACTERISTICS | | | |
| DAMP HEAT (STEADY STATE) | EXPOSED AT 40±2 °C, 90~95 %, 96 h. | 1) CONTACT RESISTANCE: 70 mΩ MAX. 2) INSULATION RESISTANCE: 100 MΩ MIN. | X - |
| RAPID CHAGE OF TEMPERTURE | TEMPERTURE -55→15~35→ 85→15~35°C TIME 30→ 2~ 3→ 30→ 2~ 3 min. UNDER 5 CYCLES. | 3) NO DAMAGE, CRACK AND LOOSENESS OF PART. | X - |
| DRY HEAT | EXPOSED AT 85 °C, 96 h. | 1) CONTACT RESISTANCE: 70 mΩ MAX. | X - |
| COLD | EXPOSED AT -55 °C, 96 h. | 2) NO DAMAGE, CRACK AND LOOSENESS OF PART. | X - |
| CORROSION SALT MIST | EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h. | NO HEAVY CORROSION. | X - |
| SULPHUR DIOXIDE | EXPOSED IN 10 PPM FOR 96 h. (TEST STANDARD: JIS C 0090) | 1) CONTACT RESISTANCE: 70 mΩ MAX. 2) NO HEAVY CORROSION. | X - |
| RESISTANCE TO SOLDERING HEAT | REFLOW RECOMMENDED TEMPERATURE PROFILE  TO BE TESTED UNDER THE ABOVE CONDITIONS | NO MELTING OF RESIN WHICH AFFECTS THE PERFORMANCE OF COMPONENT. | X - |
| SOLDERABILITY | SOLDERED AT SOLDER TEMPERATURE, 235 °C FOR IMMERSION DURATION, 2 s. | NO PINHOLE OR DEWETTING ON SOLDERED SURFACE. | X - |

| | | | | | |
|---|--------------------|--------------------|--------------------|--------------------|----------|
| REMARKS | DRAWN | DESIGNED | CHECKED | APPROVED | RELEASED |
| | <i>[Signature]</i> | <i>[Signature]</i> | <i>[Signature]</i> | <i>[Signature]</i> | |
| UNLESS OTERWISE SPECIFIED, REFER TO JIS C 5402. | 99.10.27 | 99.10.27 | 99.10.28 | 99.10.28 | |

| | |
|---|----------------------------|
| NOTE QT: QUALIFICATION TEST AT: ASSURANCE TEST X: APPLICABLE TEST | |
| HS HIROSE ELECTRIC CO., LTD. | SPECIFICATION SHEET |
| CODE NO.(OLD) | PART NO. |
| CL | FX11LA - 140P - SV (22) |
| DRAWING NO. | CODE NO. |
| ELC4 - 152103 - 02 | CL 573 - 0045 - 0 - 22 |
| | 1/1 |