



APPLICABLE STANDARD		USB3.0 SPECIFICATION AND MICRO-USB CABLE AND CONNECTORS SPECIFICATION.			
RATING	OPERATING TEMPERATURE RANGE	-30°C TO +85°C		STORAGE TEMPERATURE RANGE	-30°C TO +60°C
	VOLTAGE	30V AC		OPERATING HUMIDITY RANGE	- % TO - %
	CURRENT	SIGNAL ONLY	1 A / pin	APPLICABLE CABLE	OUTER DIAMETER OF CABLE : ϕ 3.3
		POWER APPLY	1.8 A / pin(PIN No.1,No.5) 0.5 A / pin(PIN No.2-No.4)		
SPECIFICATIONS					
ITEM		TEST METHOD		REQUIREMENTS	QT AT
CONSTRUCTION					
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.		ACCORDING TO DRAWING.	X X
MARKING		CONFIRMED VISUALLY.			X X
ELECTRICAL CHARACTERISTICS					
CONTACT RESISTANCE		100 mA (DC OR 1000 Hz).		30 m Ω MAX.	X X
INSULATION RESISTANCE		500 V DC.		1000 M Ω MIN.	X X
VOLTAGE PROOF		100 V AC FOR 1 min.		NO FLASHOVER OR BREAKDOWN.	X X
CAPACITANCE		MEASURE ADJACENT TWO CONTACTS AT 1000 \pm 10 Hz AC VOLTAGE.		2 pF MAX.	X -
MECHANICAL CHARACTERISTICS					
INSERTION AND WITHDRAWAL FORCES		A MAXIMUM RATE OF 12.5 mm/min MEASURED BY APPLICABLE CONNECTOR.		INSERTION FORCE 35 N MAX. WITHDRAWAL FORCE 10 N MIN.(INITIAL)	X -
MECHANICAL OPERATION		10000 TIMES INSERTIONS AND EXTRACTIONS. MATING SPEED - MECHANICALLY OPERATED : 500 CYCLES / h. or - MANUALLY OPERATED : 200 CYCLES / h.		1) CONTACT RESISTANCE: NO INCREASE OF MORE THAN 10 m Ω FROM INITIAL VALUE. 2) INSERTION FORCE 35 N MAX. WITHDRAWAL FORCE 8 N MIN 3) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X -
VIBRATION		FREQUENCY 10 TO 55 Hz SINGLE AMPLITUDE 0.75 mm, AT 2h FOR 3 AXIAL DIRECTIONS,TOTAL 6h.		1) NO ELECTRICAL DISCONTINUITY OF 1 μ s. 2) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X -
RANDOM VIBRATION		FREQUENCY 50 TO 2000 Hz AT 15 min FOR 3 AXIAL DIRECTIONS.			X -
SHOCK		490 m/s ² DIRECTIONS OF PULSE 11 ms AT 3 TIMES FOR 6 DIRECTIONS,TOTAL 18 TIMES.			X -
ENVIRONMENTAL CHARACTERISTICS					
THERMAL SHOCK		TEMP -55 \rightarrow +15 TO +35 \rightarrow +85 \rightarrow +15 TO + 35 °C TIME 30 \rightarrow 2 TO 3 \rightarrow 30 \rightarrow 2 TO 3 min. UNDER 10 CYCLES. (MATING APPLICABLE CONNECTOR)		1) CONTACT RESISTANCE: 70 m Ω MAX. 2) INSULATION RESISTANCE: 100 M Ω MIN. 3) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X -
HUMIDITY LIFE		TEMPERATURE -10~65 °C, HUMIDITY 90 TO 98 %, UNDER 7 CYCLES (168 h) (MATING APPLICABLE CONNECTOR)		NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X -
DRY HEAT		EXPOSED AT 85 \pm 2 °C, 96 h. (MATING APPLICABLE CONNECTOR)		NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X -
COLD		EXPOSED AT -40 \pm 2 °C, 96 h. (MATING APPLICABLE CONNECTOR)		NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X -
CORROSION SALT MIST		EXPOSED IN 5 % SALT WATER, 35 °C, FOR 48h. (LEFT UNDER UNMATED CONDITION)		NO HEAVY CORROSION.	X -
SOLDERABILITY		SOLDERING POINT IMMERSED IN SOLDER BATH OF 255 \pm 5 °C,5 sec. (USING TYPE R FRAX)		SOLDER SHALL COVER MINIMUM OF 95 % OF THE SURFACE BEING IMMERSED.	X -
RESISTANCE TO SOLDERING HEAT		A PROFILE IS SHOWN IN FIG-1, UNDER 2 CYCLES.		NO DEFORMATION OR SIGNIFICANT LOOSENESS OF CONTACTS.	X -
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
REMARK			APPROVED	NM. NISHIMATSU	15. 10. 27
HIROSE will not guarantee the performance on these specifications in case this product will be mated with the others which is not HIROSE's. Unless otherwise specified, refer to IEC 60512.			CHECKED	KN. ICHIKAWA	15. 10. 27
			DESIGNED	TS. ITO	15. 10. 27
			DRAWN	AK. AKIYAMA	15. 10. 27
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC-127029-30-00
	SPECIFICATION SHEET		PART NO.	ZX360-B-10S-UNIT (30)	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL242-0501-4-30	1/2

Sep.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

SPECIFICATIONS

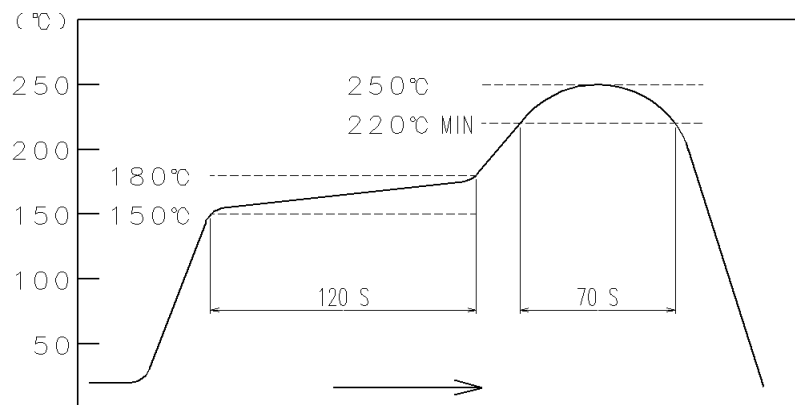

RECOMMENDED PROFILE REFERS TO FIG - 2.
(TEMPERATURE AT SMT LEADS)

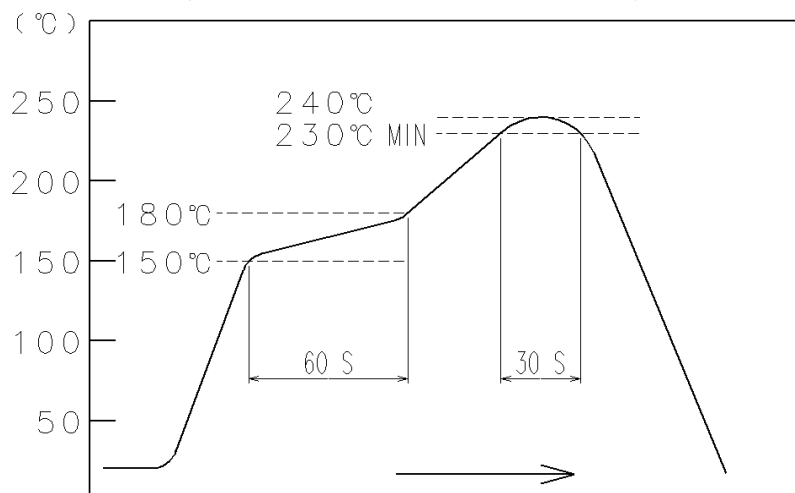

Note QT:Qualification Test AT:Assurance Test X:Applicable Test

DRAWING NO.

ELC-127029-30-00

HRS

SPECIFICATION SHEET

PART NO.

ZX360-B-10S-UNIT (30)

HIROSE ELECTRIC CO., LTD.

CODE NO

CL242-0501-4-30



2/2