



082 Pin and Socket

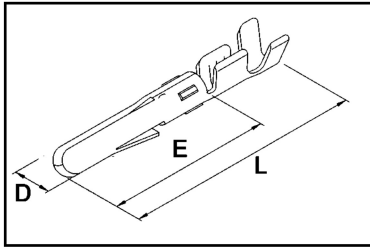


Male Plug

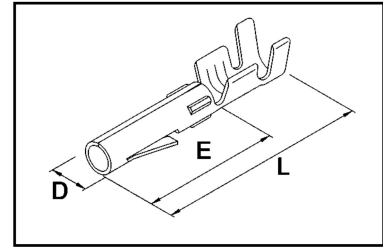


Female Socket

HOFFMAN PART NO.	REEL QTY	DESCRIPTION	WIRE SIZE	DIMENSIONS (INCHES)			
				L	E	D	UL
MPIN2018T82ST	5000	Male Pin .082 Diameter 35AM Type	20-18	0.843	0.543	0.081	Y
FPIN2018T82ST	5000	Female Socket .082 Diameter 35AM Type	20-18	0.709	0.425	0.082	Y
MPIN2418T82ST	5000	Male Pin .082 Diameter 35AM Type	24-18	0.807	0.543	0.083	N
FPIN2418T82ST	5000	Female Socket 082 Diameter 35AM Type	24-18	0.709	0.437	0.082	N

082 Locking Caps and Plugs



Female Socket



Male Plug

HOFFMAN PART NO.	DESCRIPTION	DIMENSIONS (INCHES)			
		L	B	H	W
MALE PLUG					
MPLUG2LKB	Male Plug 2 Position M Locking for .082	1.085	0.250	0.304	0.554
MPLUG3LKB	Male Plug 3 Position M Locking for .082	1.085	0.250	0.304	0.804
MPLUG4LKB	Male Plug 4 Position M Locking for .082	1.085	0.250	0.304	1.054
MPLUG6LKB	Male Plug 6 Position M Locking for .082	1.085	0.250	0.550	0.800
MPLUG9LKB	Male Plug 9 Position M Locking for .082	1.085	0.250	0.800	0.800
FEMALE CAP					
FCAP2LKB	Female Cap 2 Position M Locking for .082	1.076	0.250	0.300	0.554
FCAP3LKB	Female Cap 3 Position M Locking for .082	1.076	0.250	0.300	0.804
FCAP4LKB	Female Cap 4 Position M Locking for .082	1.076	0.250	0.300	1.054
FCAP6LKB	Female Cap 6 Position M Locking for .082	1.23	0.250	0.660	0.942
FCAP9LKB	Female Cap 9 Position M Locking for .082	1.23	0.250	0.918	0.942

