
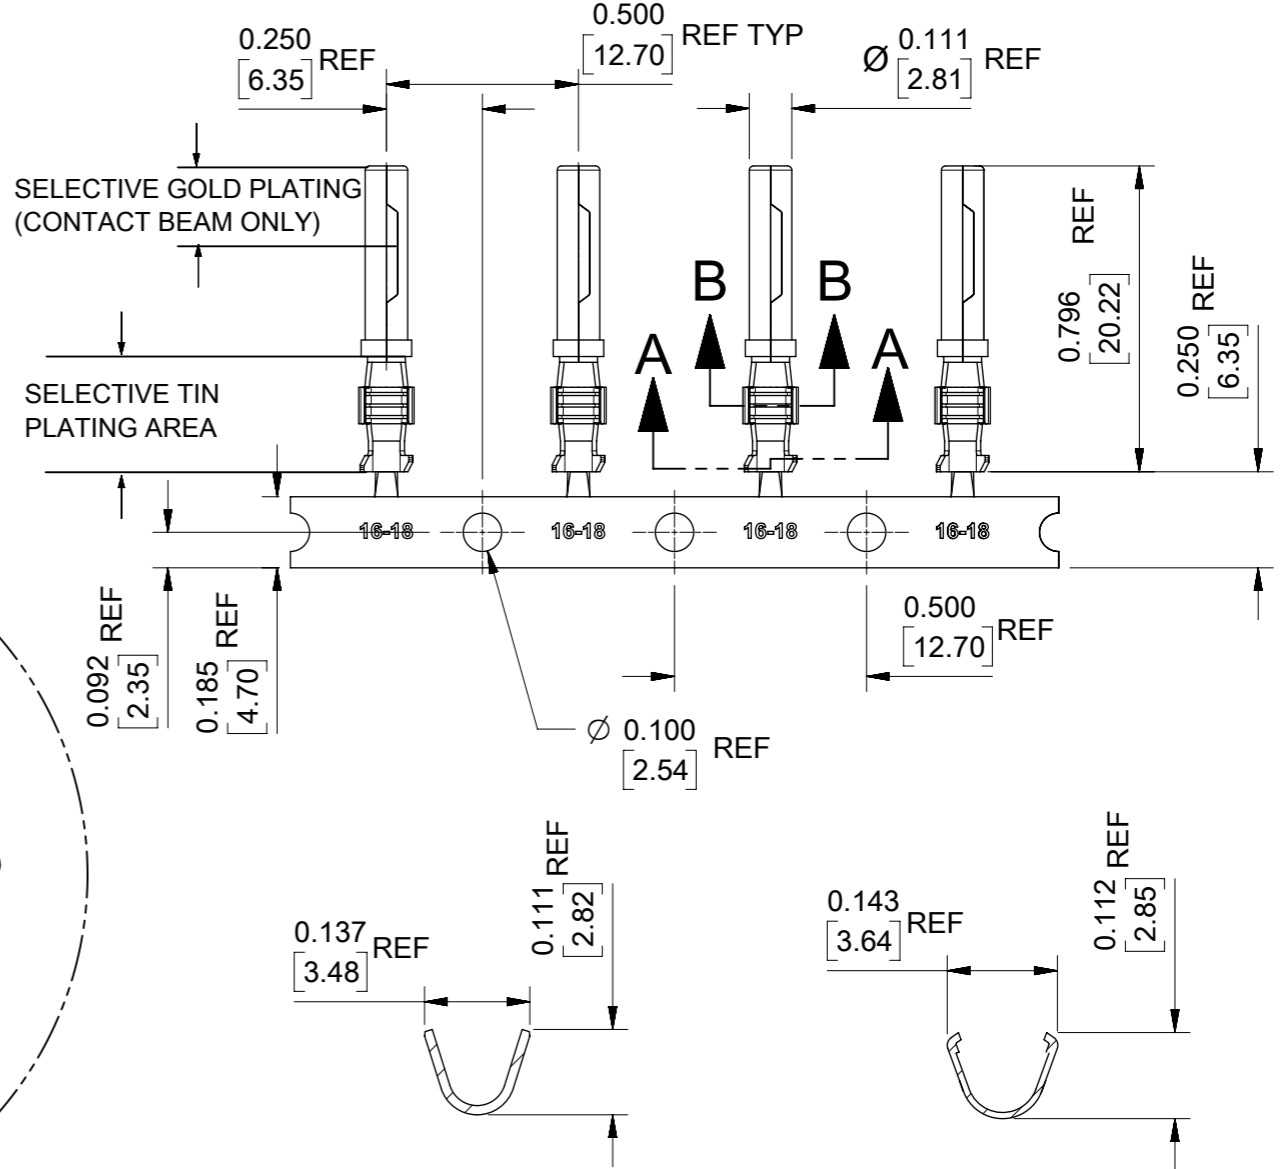


STRIP MATERIAL NUMBER	FINISH
84525-0009	SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 80μ INCH MINIMUM OVERALL
84525-0032	SELECTIVE HARD GOLD 30μ INCH MINIMUM WITH SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 50μ INCH MINIMUM OVERALL

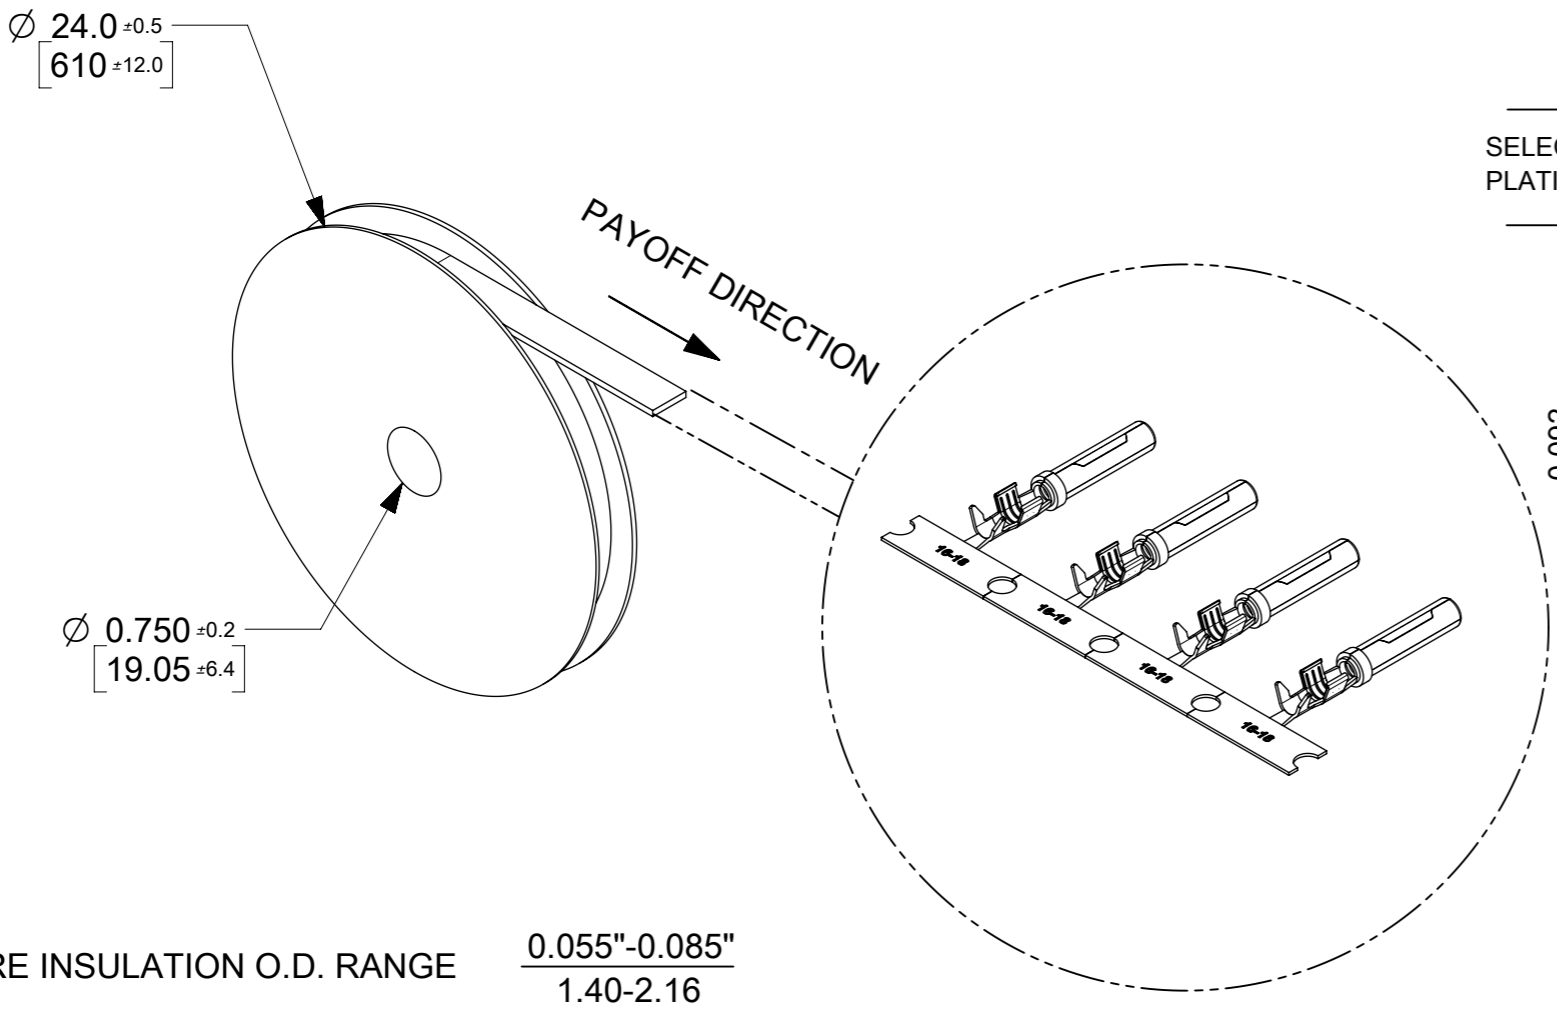

SECTION A-A  
INSULATION CRIMP

SECTION B-B  
CONDUCTOR CRIMP

- NOTES:
1. TERMINAL MATERIAL: COPPER ALLOY, .0118/0.300 THICK.  
FINISH: SEE CHART.
  2. HOOD MATERIAL: STAINLESS STEEL, .006/0.15 THICK.
  3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
  4. TERMINAL FOR USE WITH SERIES XRC & ML-XT CONNECTOR ASSEMBLIES.

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: SEE LONG TEXT			<b>molex</b>				
	DIMENSION UNITS	SCALE								
▽ = 0	INCH/[mm]	2:1	EC NO: 168799 DRWN: JFLETCHER 2017/11/21 CHK'D: JDWALLACE 2018/02/12 APPR: JDWALLACE 2018/02/20			XRC SOCKET W/SNAP WINDOW 16-18 AWG 0.055"-0.085" WIRE Ø				
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)									
▽ = 0	ANGULAR TOL ± 2.0°					PRODUCT CUSTOMER DRAWING				
▽ = 0	4 PLACES ±									
▽ = 0	3 PLACES ±		INITIAL REVISION: DRWN: JFLETCHER 2016/01/25 APPR: JALEXANDER 2016/02/23			DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
▽ = 0	2 PLACES ± 0.13					845250010		PSD	000	B
▽ = 0	1 PLACE ± 0.2		THIRD ANGLE PROJECTION			MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
▽ = 0	0 PLACES ±					SEE CHART		GENERAL MARKET		1 OF 1
▽ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		A3-SIZE		84525					