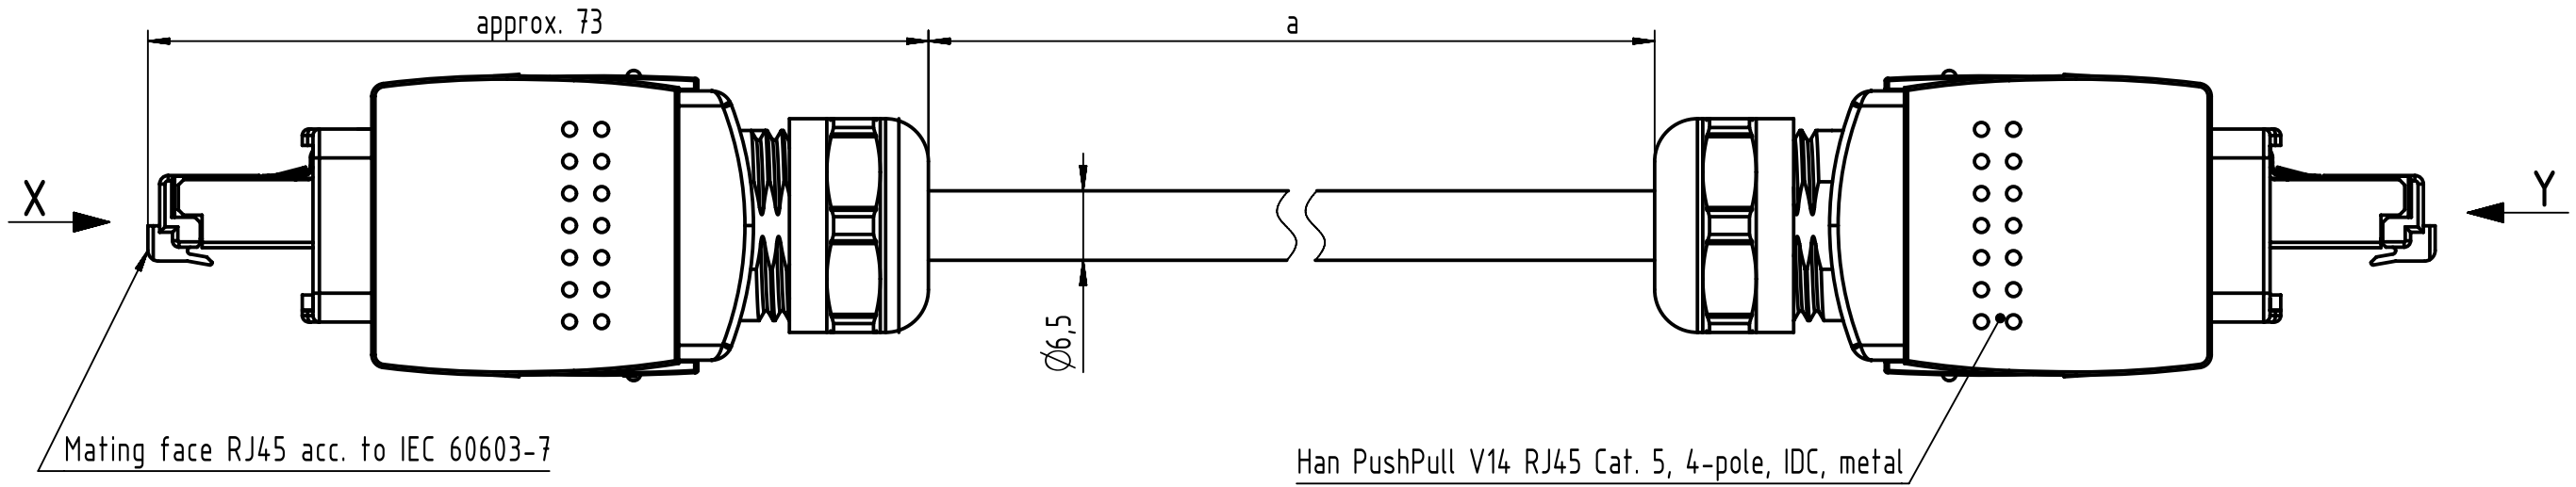


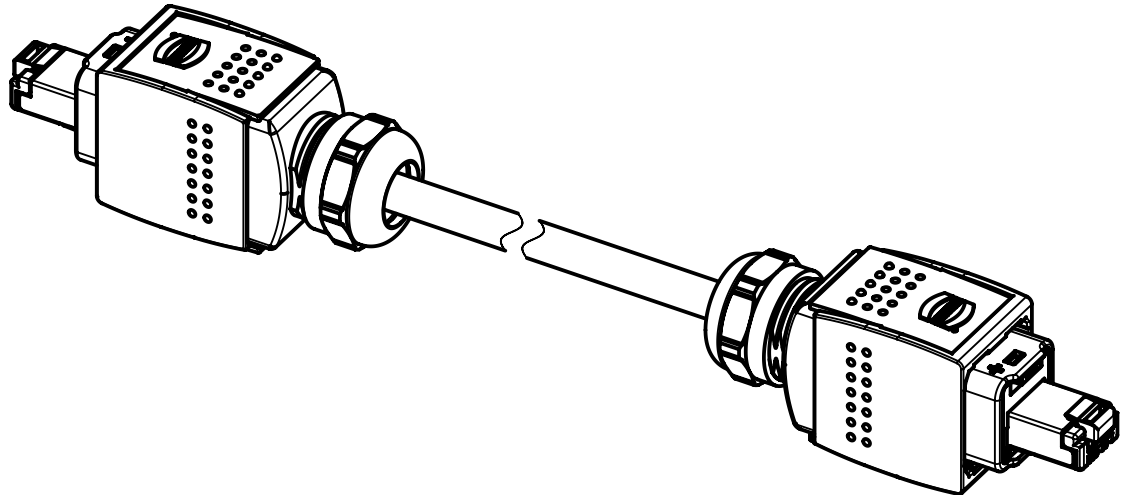
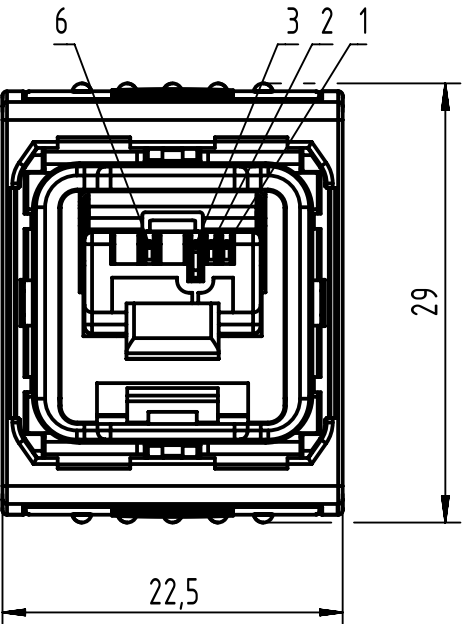
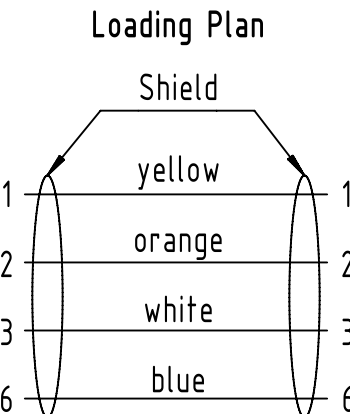
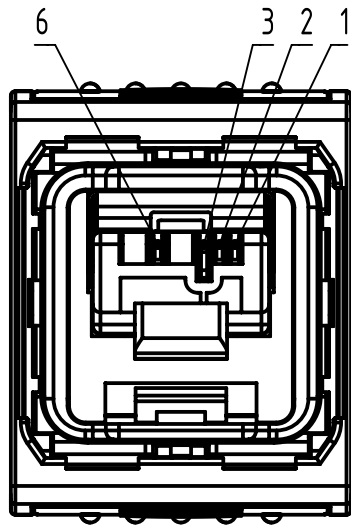
Connector Location A

Connector Location B





X
male

Y
male



- Protection level: IP65/67
- Temperature range: -40°C ... +70°C

		All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing							
		All rights reserved		Created by STOCHECIC		Inspected by COSTEA		Standardisation MUNTEANV		Date 2019-09-04		State Final Release			
		Department HCS - RO		Stocheci		Costea		Muntean							
				Title RJ Industrial Cable Assembly								Doc-Key / ECM-Nr. 100155397/UGD/006/C 500000157673			
HARTING Customised Solutions				Type TB		Number 09475656XXX						Rev. C		Page 1/3	
D-32339 Espelkamp															

	1	2	3	4	5	6	7	8	
A									A
B									B
C									C
D									D
E									E
F									F

110	09475656182	HARTING PROFINET Type C, Torsional Stress Cable, 4xAWG 22/19, PUR, Cat. 5, green	100
109	09475656181		90
108	09475656180		80
107	09475656179		70
106	09475656178		60
105	09475656177		50
104	09475656176		40
103	09475656175		30
102	09475656174		20
101	09475656173		15
100	09475656172		10
99	09475656171		9
98	09475656170		8
97	09475656169		7
96	09475656168		6
95	09475656167		5
94	09475656166		4
93	09475656165		3
92	09475656164		2
91	09475656163		1.5
90	09475656162	1	
89	09475656161	0.5	
Cont. no.	Part no.	Type of cable	Dim. a[m]

	All rights reserved Department HCS - RO	Created by STOCHECIC Stocheci	Inspected by COSTEA Costea	Standardisation MUNTEANV Muntean	Date 2019-09-04	State Final Release
HARTING Customised Solutions D-32339 Espelkamp		Title RJ Industrial Cable Assembly				Doc-Key / ECM-Nr. 100155397/UGD/006/C 500000157673
		Type TB	Number 09475656XXX			Rev. C
					Page 3/3	