

# Aluminum Electrolytic Capacitors Surface Mount Type

SRF Series

**MERITEK**

## FEATURE

- Low Impedance Series
- Applications: Suitable for AV (TV, Video, Audio), Monitor/Computer, Battery charger, DC/DC converter, SMPS, Noise filter
- Load life: 105°C



Diameter (mm)	Load Life (Hours)
4.0 ~ 6.3	1000
8.0 ~ 10.0	2000



## SPECIFICATIONS

Item	Characteristic							
Operating Temperature	-55°C ~ 105°C							
Rated Working Voltage	6.3VDC ~ 50VDC							
Nominal Capacitance	4.7 μF ~ 1500 μF, ±20% (at 20°C, 120HZ)							
Leakage Current	$I_L \leq 0.01CV$ or 3 μA whichever is greater after 2 minutes at 20°C I <sub>L</sub> : Leakage Current (μA) C: Nominal Capacitance (μF) V: Rated Voltage (V)							
Ripple Current Coefficient, Frequency	Frequency (Hz)	120	1K	10K	100K	--	--	
	Coefficient	0.70	0.80	0.90	1.00	--	--	
Low Temperature Stability, Impedance Ratio at 120Hz	Working Voltage (V)	6.3	10	16	25	35	50	
	Z-25°C / Z+20°C	3	2	2	2	2	2	
	Z-40°C / Z+20°C	5	4	4	3	3	3	
Load Life	Capacitance	≤ ±25% of initial value					Apply Working Voltage for Rated Load Life / Temperature Stabilized at +20°C.	
	Dissipation Factor	≤ 200% of initial value						
	Leakage Current	≤ Initial specified value						
Shelf Life	Capacitance	≤ ±25% of initial value					After storage condition without voltage applied for 1000 hours at Rated Temperature, Stabilizing for 1 to 2 hours.	
	Dissipation Factor	≤ 200% of initial value						
	Leakage Current	≤ Initial specified value						
Resistance to Soldering Heat	Capacitance	≤ ±20% of initial value					For other procedures than those specified, Soldering iron method: Temperature: 260±5°C. Application time of soldering iron: 10 sec	
	Dissipation Factor	≤ specified value						
	Leakage Current	≤ specified value						

# Aluminum Electrolytic Capacitors Surface Mount Type

SRF Series

**MERITEK**

## STANDARD RATING

Rated Voltage	Cap	Case Size	Tan $\delta$	Ripple Current	Impedance
(VDC)	( $\mu$ F)	(mm)	(%)	(mA/rms)	( $\Omega$ )
6.3	27	4x5.4	0.24	90	1.45
	33	5x5.4	0.24	170	0.70
	47	5x5.4	0.24	170	0.70
	56	5x5.4	0.24	170	0.70
	68	6.3x5.4	0.24	250	0.39
	100	6.3x5.4	0.24	250	0.39
	150	6.3x5.4	0.24	250	0.39
	220	6.3x5.4	0.24	250	0.39
	330	6.3x7.7	0.24	300	0.30
	470	8x10.2	0.28	600	0.15
	680	8x10.2	0.28	600	0.15
	1000	8x10.2	0.28	600	0.15
	1500	10x10.2	0.28	850	0.08
10	22	4x5.4	0.20	90	1.45
	27	5x5.4	0.20	170	0.70
	33	5x5.4	0.20	170	0.70
	47	6.3x5.4	0.20	250	0.39
	56	6.3x5.4	0.20	250	0.39
	68	6.3x5.4	0.20	250	0.39
	100	6.3x5.4	0.20	250	0.39
	150	6.3x5.4	0.20	250	0.39
	220	6.3x7.7	0.20	300	0.30
	330	8x10.2	0.24	600	0.15
	470	8x10.2	0.24	600	0.15
	680	10x10.2	0.24	850	0.08
	1000	10x10.2	0.24	850	0.08
16	15	4x5.4	0.16	90	1.45
	22	5x5.4	0.16	170	0.70
	27	5x5.4	0.16	150	0.76
	33	6.3x5.4	0.16	250	0.44
	47	6.3x5.4	0.16	250	0.39
	56	6.3x5.4	0.16	250	0.39
	68	6.3x5.4	0.16	250	0.39
	100	6.3x5.4	0.16	250	0.39
	150	6.3x7.7	0.16	300	0.30
	220	6.3x7.7	0.16	300	0.30
	330	8x10.2	0.20	600	0.15
	470	8x10.2	0.20	600	0.15
	680	10x10.2	0.20	850	0.08

Rated Voltage	Cap	Case Size	Tan $\delta$	Ripple Current	Impedance	
(VDC)	( $\mu$ F)	(mm)	(%)	(mA/rms)	( $\Omega$ )	
25	10	4x5.4	0.14	90	1.45	
	15	5x5.4	0.14	170	0.70	
	22	5x5.4	0.14	170	0.70	
	27	6.3x5.4	0.14	250	0.39	
	33	6.3x5.4	0.14	250	0.44	
	47	6.3x5.4	0.14	250	0.39	
	56	6.3x5.4	0.14	250	0.39	
	68	6.3x5.4	0.14	250	0.39	
	100	6.3x7.7	0.14	300	0.30	
	150	8x10.2	0.16	600	0.15	
	220	8x10.2	0.16	600	0.15	
	330	8x10.2	0.16	600	0.15	
	470	10x10.2	0.16	850	0.08	
	35	4.7	4x5.4	0.12	90	1.45
		10	5x5.4	0.12	170	0.70
15		5x5.4	0.12	170	0.70	
22		5x5.4	0.12	170	0.70	
27		6.3x5.4	0.12	250	0.39	
33		6.3x5.4	0.12	250	0.39	
47		6.3x5.4	0.12	250	0.39	
56		6.3x7.7	0.12	300	0.30	
68		6.3x7.7	0.12	300	0.30	
100		8x10.2	0.14	600	0.15	
150		8x10.2	0.14	600	0.15	
220		8x10.2	0.14	600	0.15	
330		10x10.2	0.14	850	0.08	
50		4.7	4x5.4	0.12	64	2.55
		10	6.3x5.4	0.12	215	0.52
	15	6.3x5.4	0.12	215	0.52	
	22	6.3x5.4	0.12	215	0.52	
	27	6.3x7.7	0.12	243	0.44	
	33	6.3x7.7	0.12	243	0.44	
	47	6.3x7.7	0.12	243	0.44	
	56	8x10.2	0.14	400	0.22	
	68	8x10.2	0.14	400	0.22	
	100	8x10.2	0.14	400	0.22	
	150	10x10.2	0.14	585	0.13	
	220	10x10.2	0.14	585	0.13	


Note: Ripple Current measured at 100KHz, 105°C, Impedance at 20°C 100KHz

# Aluminum Electrolytic Capacitors Surface Mount Type

SRF Series

**MERITEK**

## DIMENSION

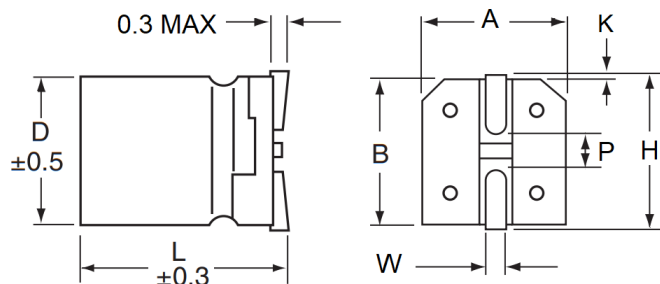

Unit :mm

D	L	A $\pm 0.2$	B $\pm 0.2$	H Max	W	P $\pm 0.2$	K
4.0 (D)	5.4	4.3	5.0	5.5	0.65 $\pm$ 0.1	1.0	0.35+0.15/-0.2
5.0 (E)	5.4	5.3	6.0	6.5	0.65 $\pm$ 0.1	1.5	0.35+0.15/-0.2
6.3 (F)	5.4	6.6	7.3	7.8	0.65 $\pm$ 0.1	2.1	0.35+0.15/-0.2
6.3 (F)	7.7	6.6	7.3	7.8	0.65 $\pm$ 0.1	2.1	0.35+0.15/-0.2
8.0 (H)	10.2	8.3	9.1	10.0	0.90 $\pm$ 0.2	3.1	0.70 $\pm$ 0.20
10.0 (J)	10.2	10.3	11.1	12.0	0.90 $\pm$ 0.2	4.6	0.70 $\pm$ 0.20

## PART NUMBERING SYSTEM

SRF    1H    221M    J102  
(1)    (2)    (3)    (4)

No	Item	Code	Description	
(1)	Meritek Series	SRF	Aluminum Electrolytic Capacitors, SMD type, 1000 ~ 2000 Hrs 105°C	
(2)	Rated Voltage	1H	50VDC	DC Voltage Code, 0J to 1H
(3)	Capacitance	221M	220 $\mu$ F $\pm$ 20% (M)	First two digit: significant, Third: Multiplier
(4)	Size Code	J102	10x10.2mm	DxL (mm)

Voltage	4	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	500
Code	0G	0J	1A	1C	1E	1V	1H	1J	2A	2C	2D	2E	2V	2G	2W	2H

Diameter	4	5	6.3	8	10	12.5	14.5	16	18	20	22	25
Code	D	E	F	H	J	K	U	L	M	N	P	Q

## LEGACY PART NUMBERING SYSTEM

SRF    50V    221M    J102  
(1)    (2)    (3)    (4)

No	(1)	(2)	(3)	(4)
Item	Meritek Series	Rated Voltage	Rated Capacitance	Size Code

\*Specifications subject to change without notice.