



UNIT: mm

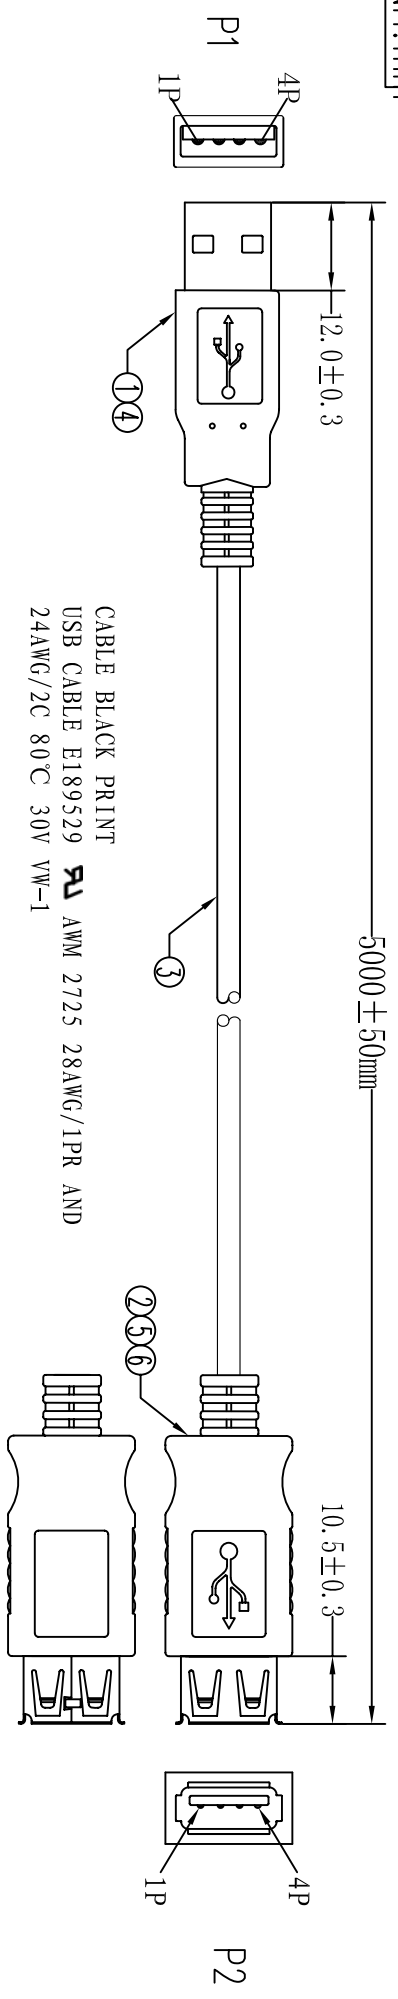


CABLE BLACK PRINT  
 USB CABLE E189529 **AWM** 2725 28AWG/1PR AND  
 24AWG/2C 80°C 30V VW-1

**PIN ASSIGNMENT:**

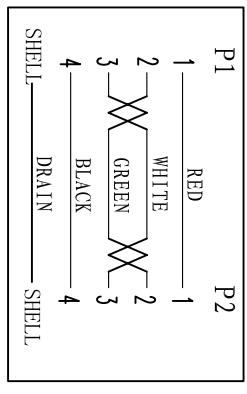

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 3 Ohm(max)  
 3. Insulation resistance: 20Mohm(min)  
 4. dielectric test: DC 300V

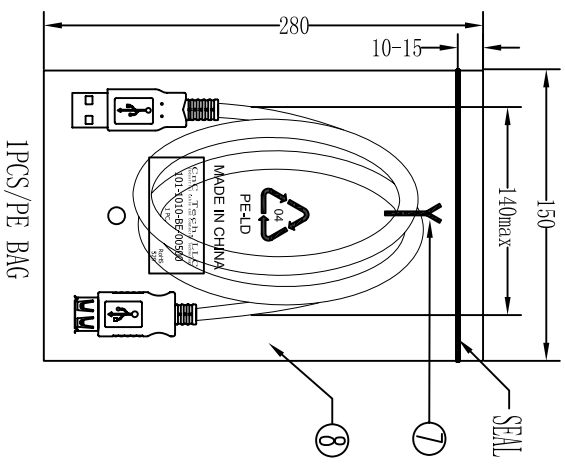

⑨	PE BAG	1/5	CLEAR SIZE: 360*380*40.05mm PRINT BLACK"MADE IN CHINA"+5PCS"
⑧	PE BAG	1	CLEAR SIZE: 150*280*40.05mm PRINT BLACK"MADE IN CHINA"
⑦	TIE	1	WHITE L=120mm
⑥	IN JACKET	3g	CLEAR LDPE (MOULD NO: NM-027)
⑤	OUT JACKET	7g	BEIGE (IV-29#) PVC-40P (MOULD NO: NM-83)
④	OUT JACKET	6g	BEIGE (IV-29#) PVC-40P (MOULD NO: NM-40)
③	CABLE	1	BEIGE (IV-29#) USB1. 1 UL2725 28#/1P+24#/2C+AEB OD: 4.7mm L=5000±20mm
②	CONN	1	USB A FEMALE SHELL: NICKEL PIN G/F SHORT TYPE INSULATOR COLOR: WHITE
①	CONN	1set	USB A MALE SHELL: NICKEL PIN G/F 4PCS TYPE INSULATOR COLOR: WHITE
NO.	NAME	QTY	SPECIFICATION

<b>CNC Tech, LLC</b>			
Industrial Cable and Connector Technology			
DRAWN	Andy	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	101-1010-BE-00500
DECIDED		DATE	2013-8-23
VERSIONS/EDITION	A/0	PROJECTION	