


Note: Dimension in red represents old dimension

PIN OUT:

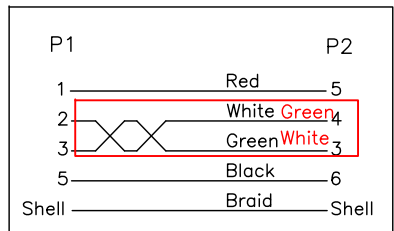

P/N	L
105-1031-BL-00050-1	500±20
105-1031-BL-00100-1	1000±30
105-1031-BL-00200-1	2000±50
105-1031-BL-00300-1	3000±50
105-1031-BL-00500-1	5000±50

ITEM	DESCRIPTION	SPECIFICATION	Q'TY
1	Cable	(7/0.12TS PVC ID:0.88)*1P+(7/0.2TS PVC ID:1.35)*2C+AB PVC Jacket OD:4.2 Color:Black	A/R
2	Mini USB B/M	Mini USB 5P B/M Insulator Black,Contact G/F,Shell Nickel Plated	1Set
3	Type C/M	Type C/M Insulator Black,Contact G/F,Shell Nickel Plated 2.0 OTG RD=5.1KΩ C1=10NF+Shielding	1Set
4	Outer molding	45P PVC Color:Black	A/R

				DRAWN:	GENERAL TOLERANCE: .X=±0.50 .XX=±0.30	<b>CnC Tech</b> Industrial Cable and Connector Technology	
				CHECKED:	UNIT: MM SCALE: 1:1		DESCRIPTION: <b>MINI USB M TO TYPE C M CABLE</b>
B					SHEET: 1 / 1	PART NO:	<b>A4</b>
A	04-Jun-2021			APPROVAL:	PROJECTION:	<b>105-1031-BL-00XXX-1</b>	
REV	DATE	FILE	BY				