

	12		11			10	
н	ASSEMBLY P/N	LENGTH METERS)					
	1064152101		1.0		+0.2/-0.0		
	1064152102		2.0		+0	.2/-0.0	
	1064152103		3.0		+0	.2/-0.0	
	1064152104		4.0		+0	.2/-0.0	
	1064152105	5.0			+0.25/-0.0		
	1064152106	6.0			+0.25/-0.0		
G	1064152107		7.0		+0.25/-0.0		
	1064152108		8.0		+0.	25/-0.0	
	1064152110		10.0		+0.	30/-0.0	
	1064152115		15.0	•	+0.30/-0.0		
	1064152120		20.0	•	+0.	40/-0.0	
	1064152130		30.0	•	+0.	60/-0.0	
	1064152150		50.0		+1.	00/-0.0	
	1064152199		100.0		+2.	00/-0.0	

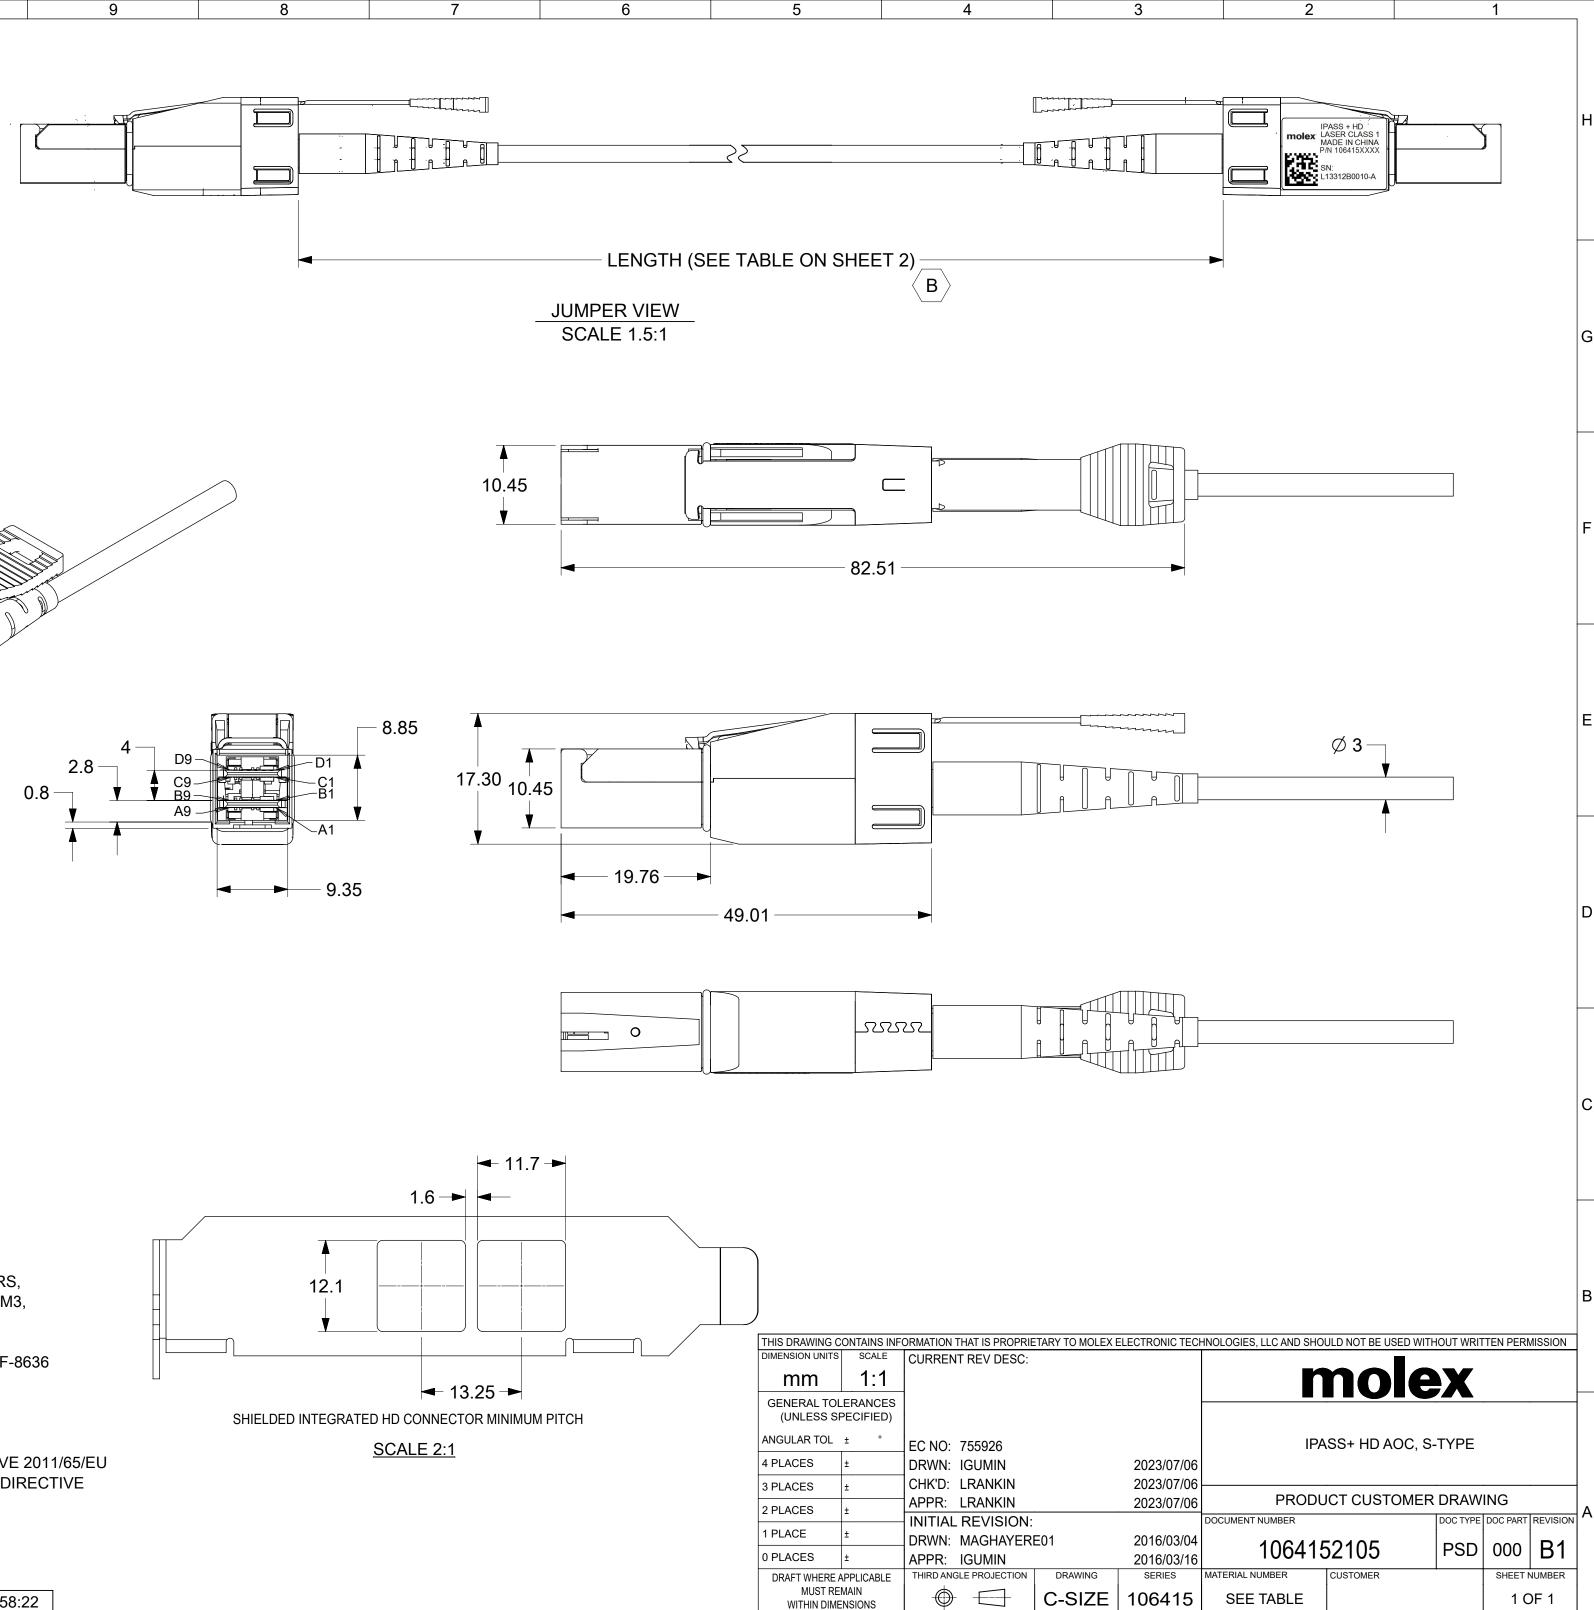

5


4

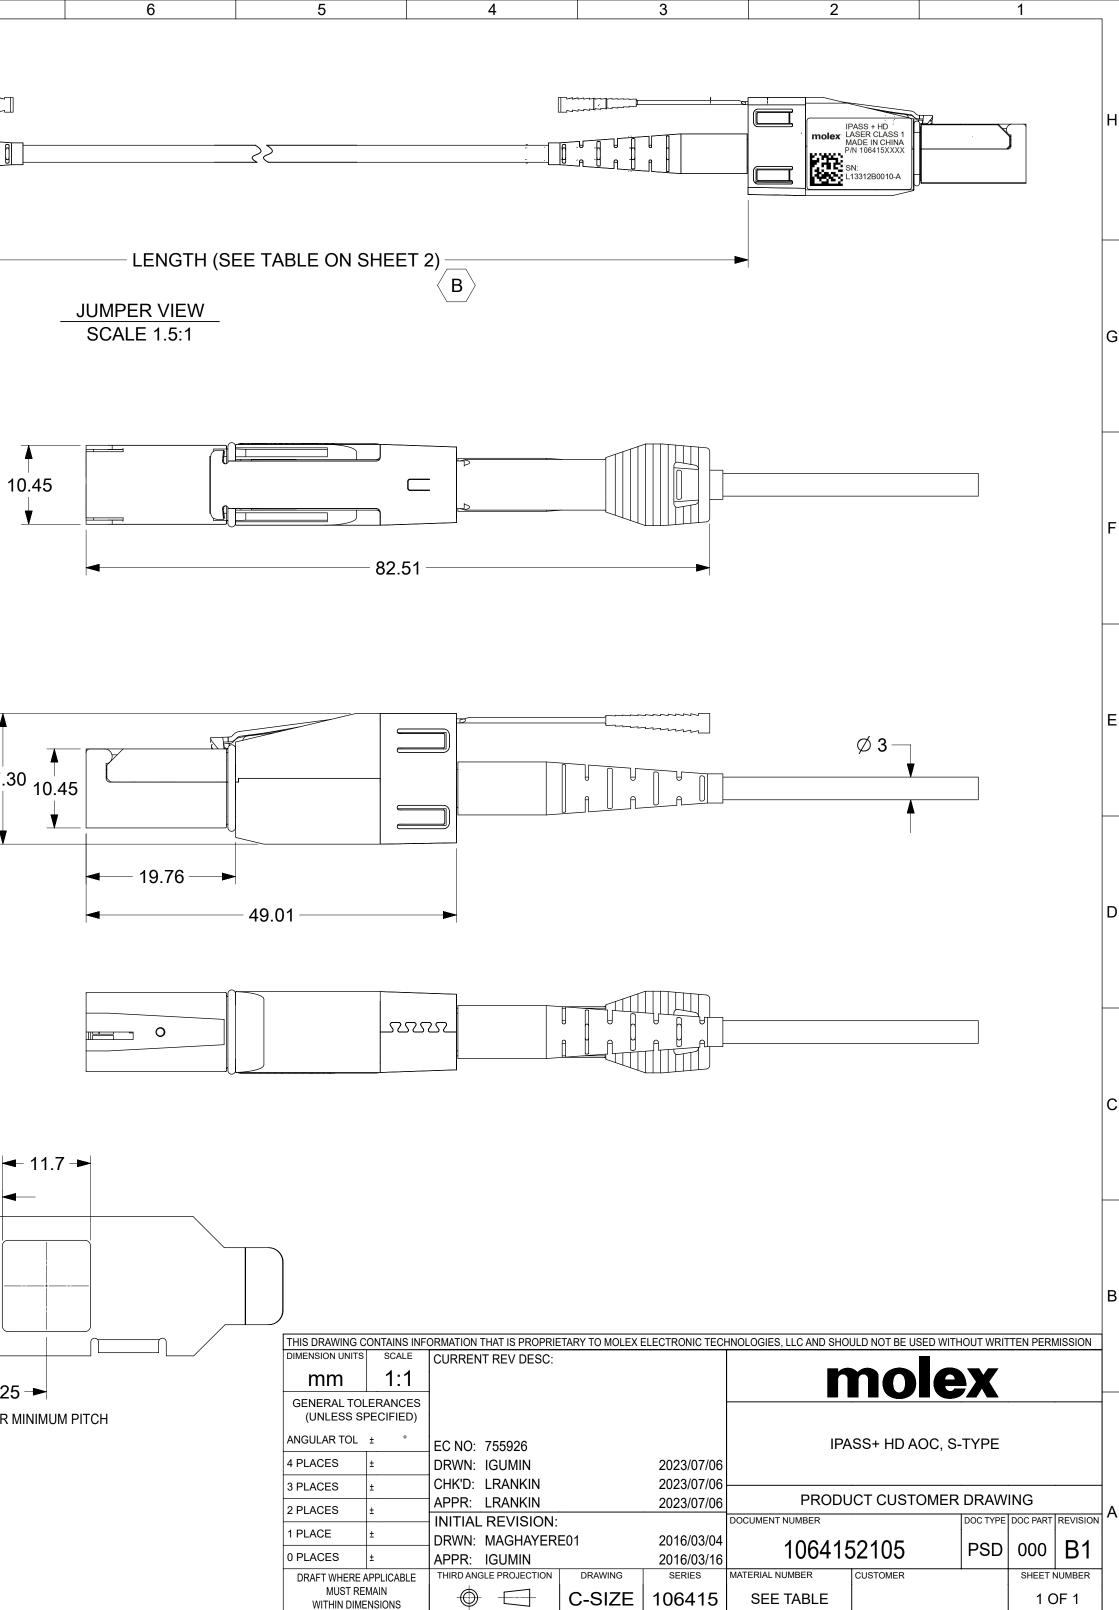



З

2

1

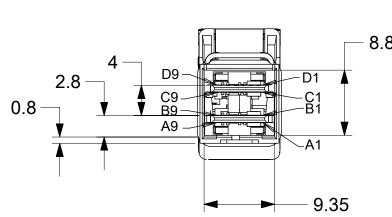

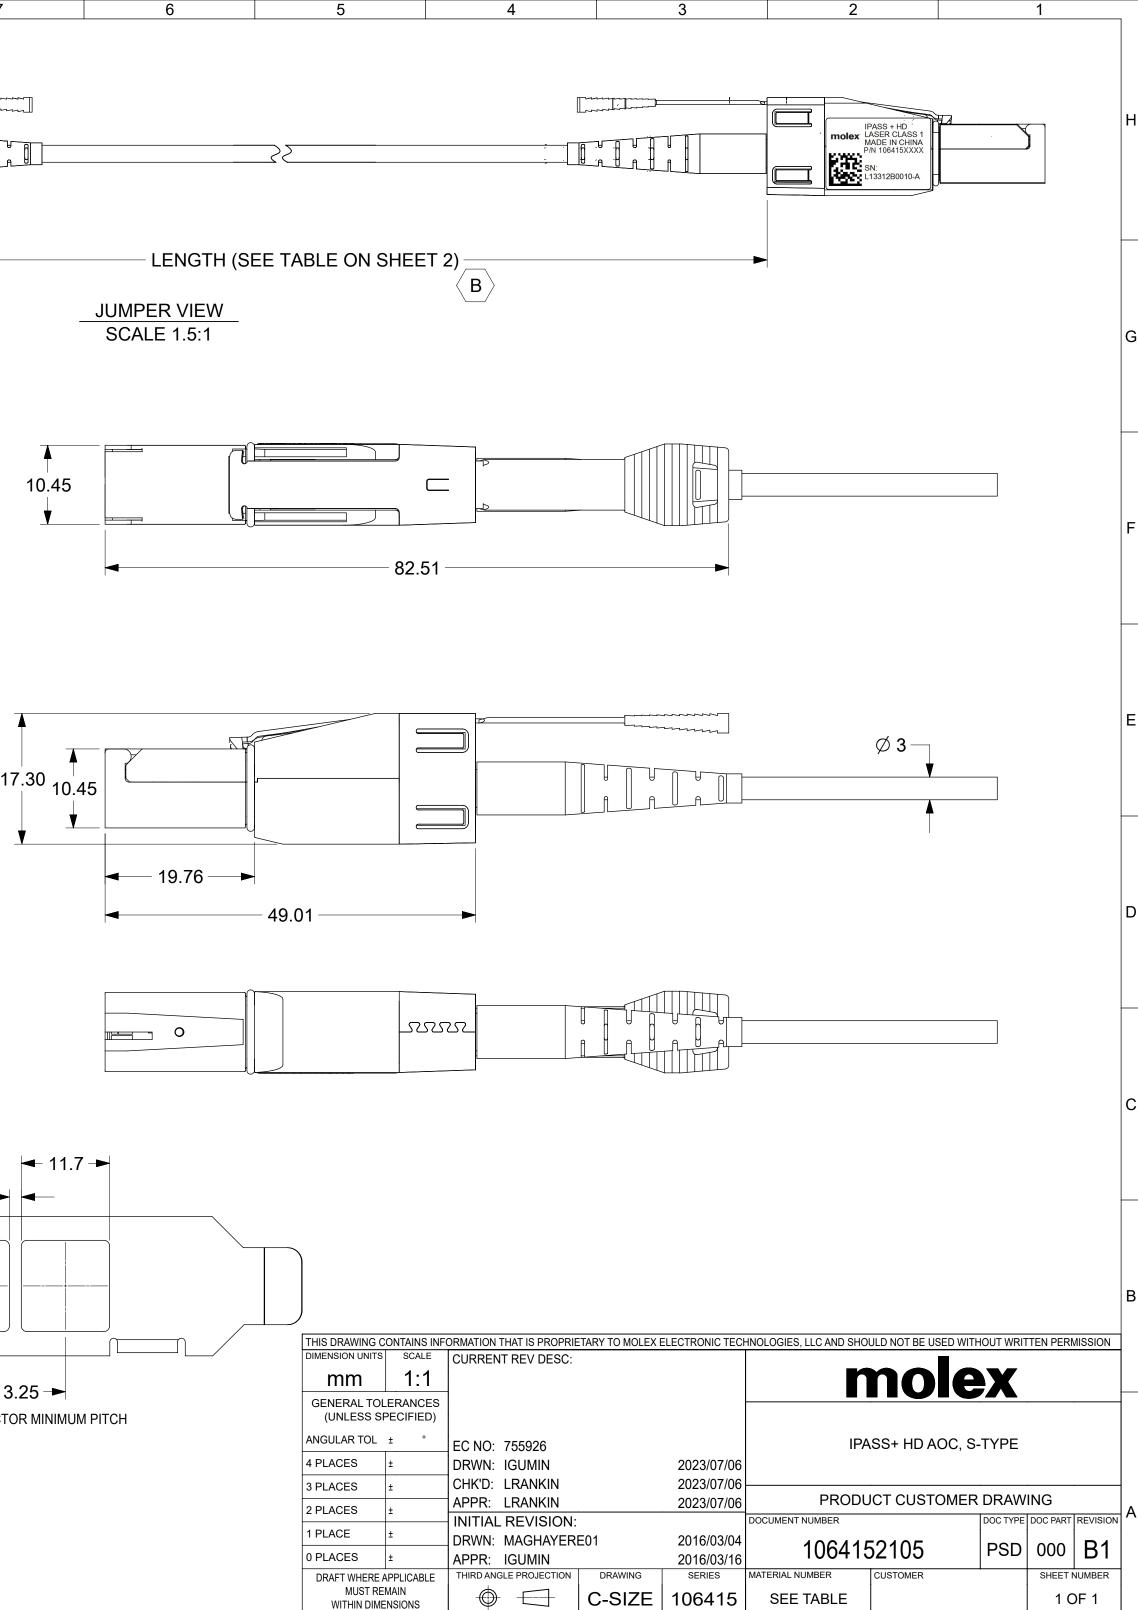



NOTES:

D

C


В

Α

1. MATERIALS: BACKSHELLS - ZINC DIECAST WITH NICKEL PLATING. LATCH - STAINLESS STEEL.

PULL - MOLDED PLASTIC, 279C (BLUE)

- 2. CABLE TYPE PLENUM (OFNP) WITH 8 MULTIMODE FIBERS, MINIMUM BEND RADIUS 25mm, FIBER CORE 50/125um OM3, CABLE JACKET COLOR-AQUA, DIAMETER 3.2mm MAX.
- 3. ELECTRICAL AND MECHANICALS PER SFF-8644 AND SFF-8636
- 4. PLUG MATES TO 1X1, 1X2 AND 1X4 RECEPTACLE EMI HOUSING ASSEMBLY SERIES.
- 5. THIS PRODUCT COMPLIES WITH EU RoHS PER DIRECTIVE 2011/65/EU AND ITS SUBSEQUENT AMENDMENTS, INCLUDING THE DIRECTIVE EU 2015/863.
- 6. DUST COVER NOT SHOWN BUT INCLUDED.

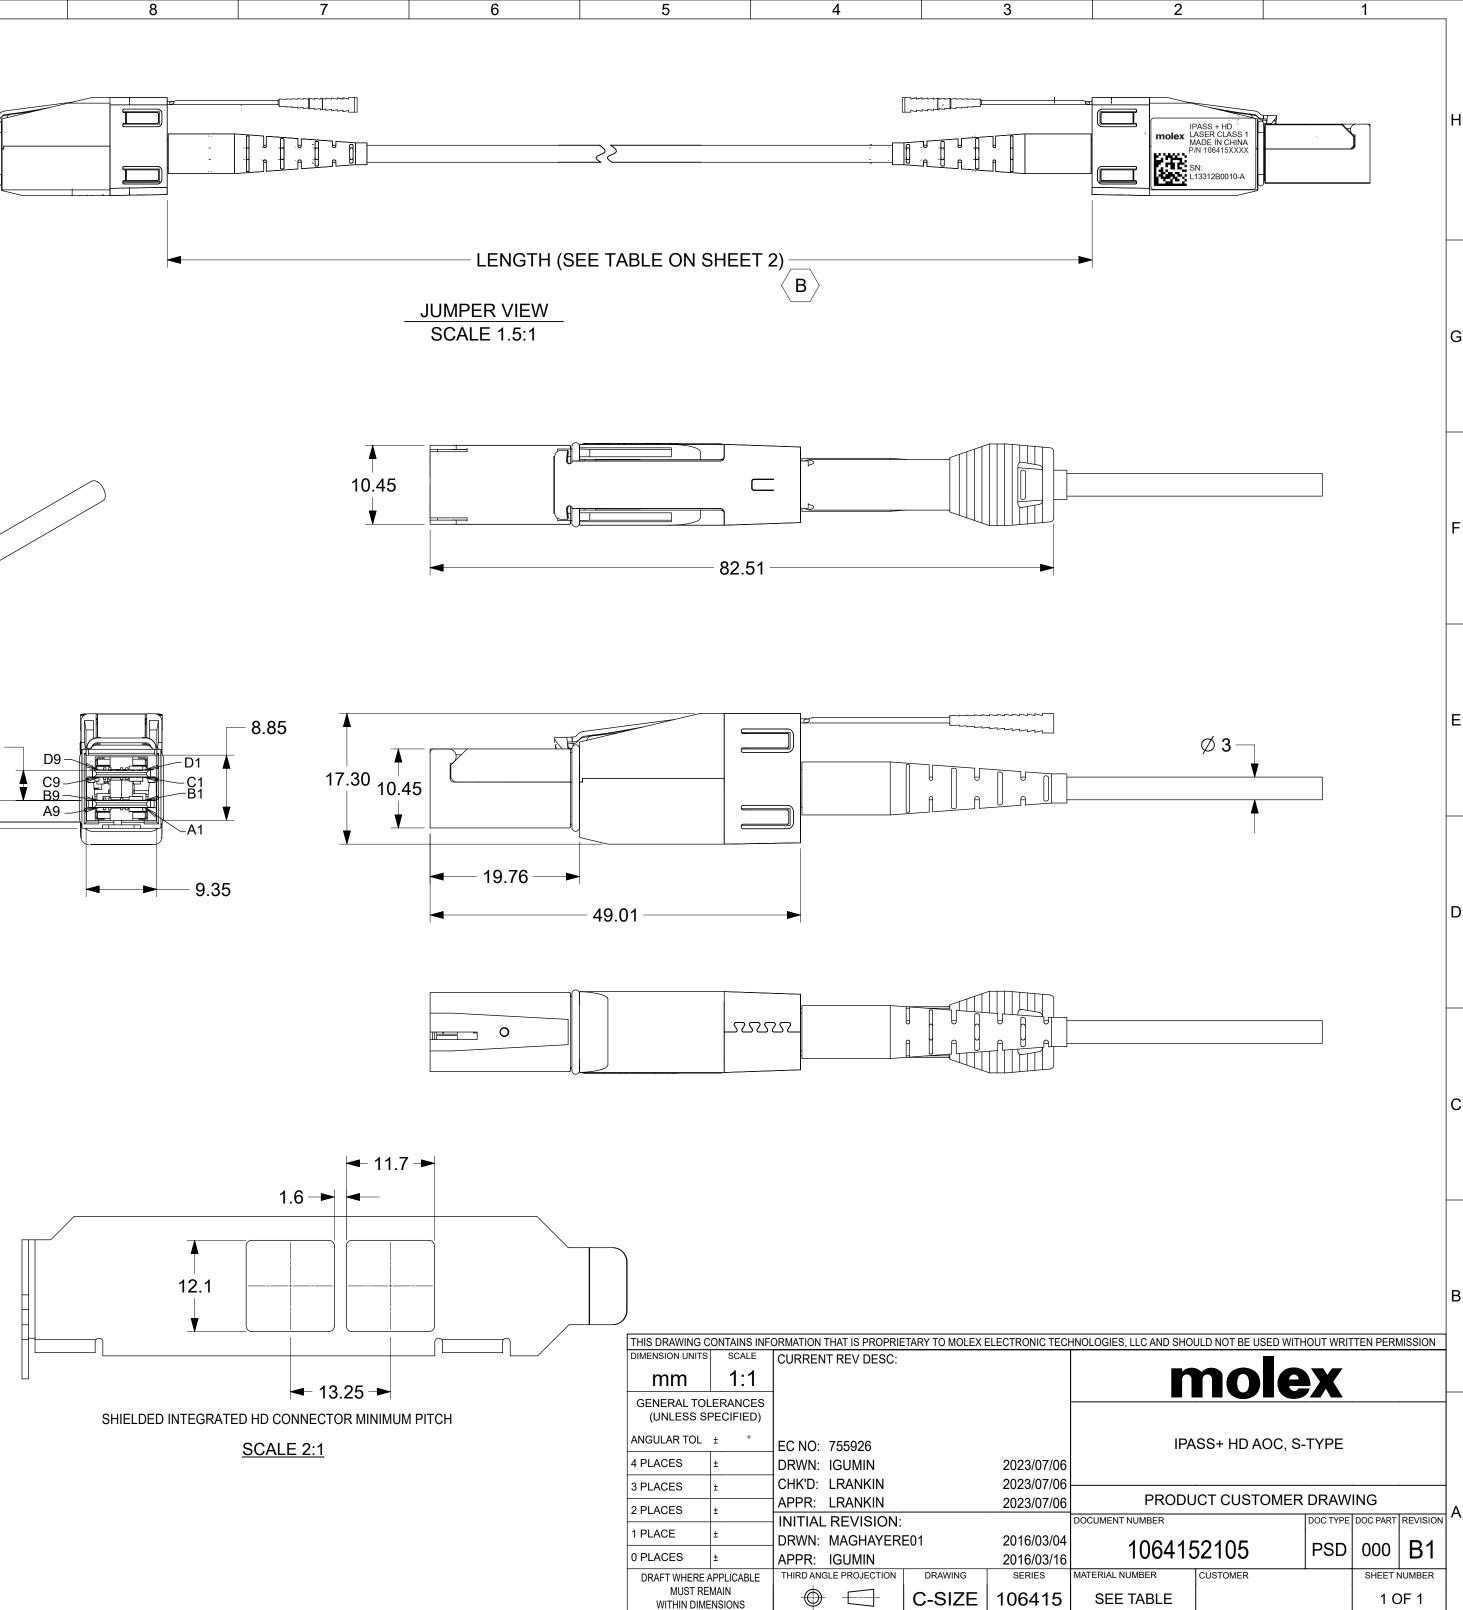

DOCUMENT STATUS	P1	RELEASE DATE	2023/07/06	18:58:22	2			
FORMAT: master-tb-prod-C REVISION: J1 DATE: 202 (105/01		11	10		9	8	7	6