

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



PANDUIT PART #	STUD SIZE	DIMENSIONS in. [mm]					CA9 SERIES CRIMP DIE	CA-800(EZ) SERIES CRIMP DIE
		L ± .03 [0,8]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .03 [0,8]	H ± .01 [0,3]		
PNF14-6LF-3K	#6	.85 [21,6]	.25 [6,4]	.18 [4,6]	.63 [16,0]	.14 [3,6]	CD9-2A	CD-800-2
PNF14-8LF-3K	#8	.92 [23,4]	.29 [7,4]	.23 [5,8]	.68 [17,3]	.16 [4,1]		
PNF14-10LF-3K	#10	.92 [23,4]	.33 [8,4]	.23 [5,8]	.68 [17,3]	.19 [4,8]		
PNF14-10LFN-3K	#10	.92 [23,4]	.28 [7,1]	.23 [5,8]	.68 [17,3]	.19 [4,8]		

PRESS/APPLICATOR COMPATIBILITY CHART

PRESS	CP-871	CP-861
APPLICATOR	CA9 CA-800EZ	CA-800

NOTES:

- cULus LISTED FOR:
 - A. #16-14 AWG [1,5-2,5 mm²] SOLID OR STRANDED COPPER WIRE
 - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
 - C. 600 V. MAX. VOLTAGE RATING
- SEE www.panduit.com FOR PACKAGE QUANTITIES
- MATERIAL:
 - A. STAMPING: .03" [0,8] THK COPPER, TIN PLATED
 - B. HOUSING: NYLON, BLUE
 - C. SLEEVE: BRASS, TIN PLATED
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- WIRE STRIP LENGTH: 1/4" ^{+1/32} [6,4^{+0,8}]

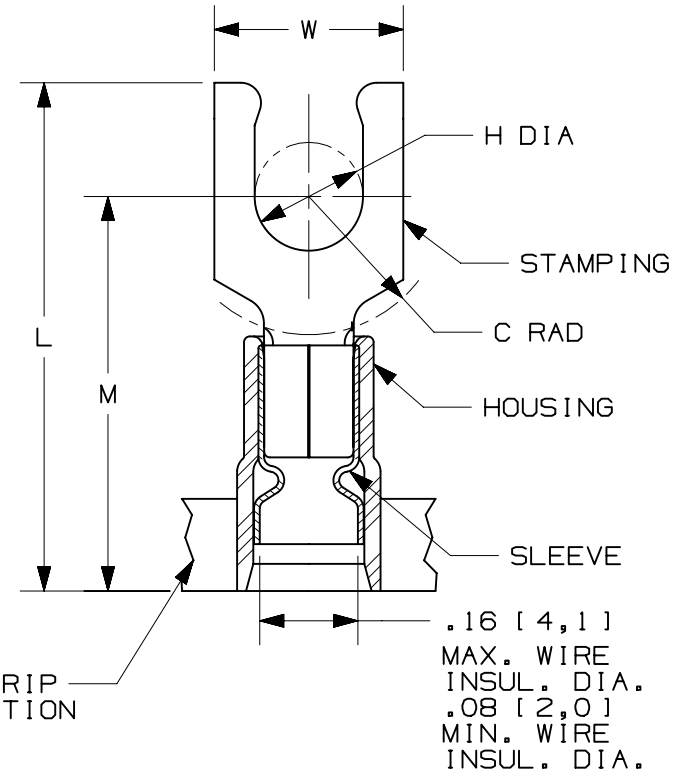

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
06	06/14	MBY	JHNU	RGB	REVISED NOTES, MOVED TOOLS TO TABLE, REVISED CERTIFICATION	N41147BA-A41147
05	10.24.12	JBN	LSM	VMB	REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS.	A41147

TITLE LOCKING FORK TERMINALS, NYLON INSULATED, NON-FUNNEL ENTRY #16-14, CONTINUOUS REEL		CUSTOMER DRAWING	
ITEM REVISION NAME N41147BA/06		PANDUIT	
DATASET FILE NAME N41147BA_DC/06A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: SEE NOTES	
DRAWING NUMBER: A41147		DRAWING NUMBER: A41147	
DRAWN BY GRM	DATE -	CHK FS	SCALE N.T.S.
SHEET 1 OF 1		A	

D101000A/12