

BARBARA-W

~35° wide beam

SPECIFICATION:

Ø 70.0 mm **Dimensions** Height 44.7 mm Fastening glue **ROHS** compliant yes 🕕

MATERIALS:

Component **Type Material BARBARA-W** Reflector PC



Colour **Finish** Coating metal lacquer

ORDERING INFORMATION:


Component

C11553_BARBARA-W

» Box size: 476 x 273 x 247 mm

Qty in box	MOQ	MPQ	Box weight (kg)
288	90	18	5.3

PRODUCT DATASHEET C11553_BARBARA-W

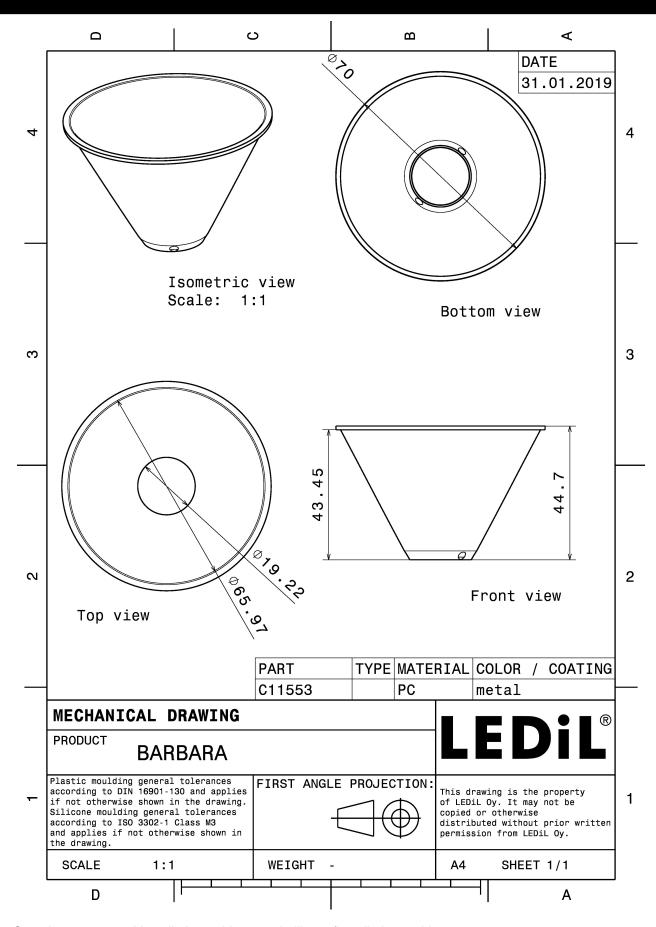

See also our general installation guide: www.ledil.com/installation_guide




OPTICAL RESULTS (MEASURED):

bridgelux

LED BXRA ES Rectangle

FWHM / FWTM 37.0° / 70.0°
Efficiency 90 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour White
Required components:



CITIZEN

LED CL-L330
FWHM / FWTM 35.0°
Efficiency 90 %
Peak intensity 2.5 cd/lm
LEDs/each optic 1

Light colour White Required components:

CITIZEN


 LED
 CLL03x/CLU03x

 FWHM / FWTM
 42.0° / 74.0°

 Efficiency
 89 %

 Peak intensity
 1.8 cd/lm


LEDs/each optic 1
Light colour White
Required components:




CITIZEN

LED CLU720/721/723

FWHM / FWTM 35.0° / 70.0°
Efficiency 91 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour White
Required components:






Published: 03/05/2018



OPTICAL RESULTS (MEASURED):

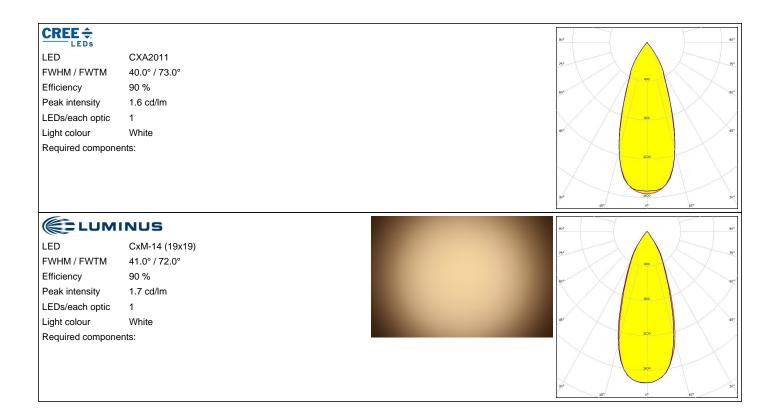



OPTICAL RESULTS (SIMULATED):

CITIZEN

 LED
 CLU730/731/733


 FWHM / FWTM
 37.0° / 70.0°

 Efficiency
 91 %

 Peak intensity
 2 cd/lm

LEDs/each optic 1
Light colour White

Required components:





PRODUCT DATASHEET C11553_BARBARA-W

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405, Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy