

BROOKE-G2-M

~30° medium beam compatible with LEDiL HEKLA.

SPECIFICATION:

Dimensions	Ø 45.0 mm
Height	18.9 mm
Fastening	socket
ROHS compliant	yes 🕕



MATERIALS:


Component	Type	Material	Colour	Finish	Coating
BROOKE-G2-M	Reflector	PC	metal		HMDS

ORDERING INFORMATION:

Component Qty in box MOQ MPQ Box weight (kg) 720 45 45 5.0

F14739_BROOKE-G2-M » Box size: 480 x 280 x 300 mm

PRODUCT DATASHEET F14739_BROOKE-G2-M

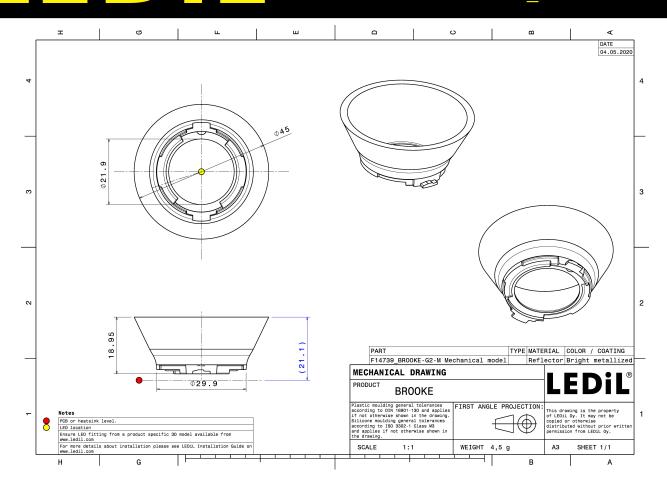


See also our general installation guide: www.ledil.com/installation_guide


Published: 02/05/2018

2/32




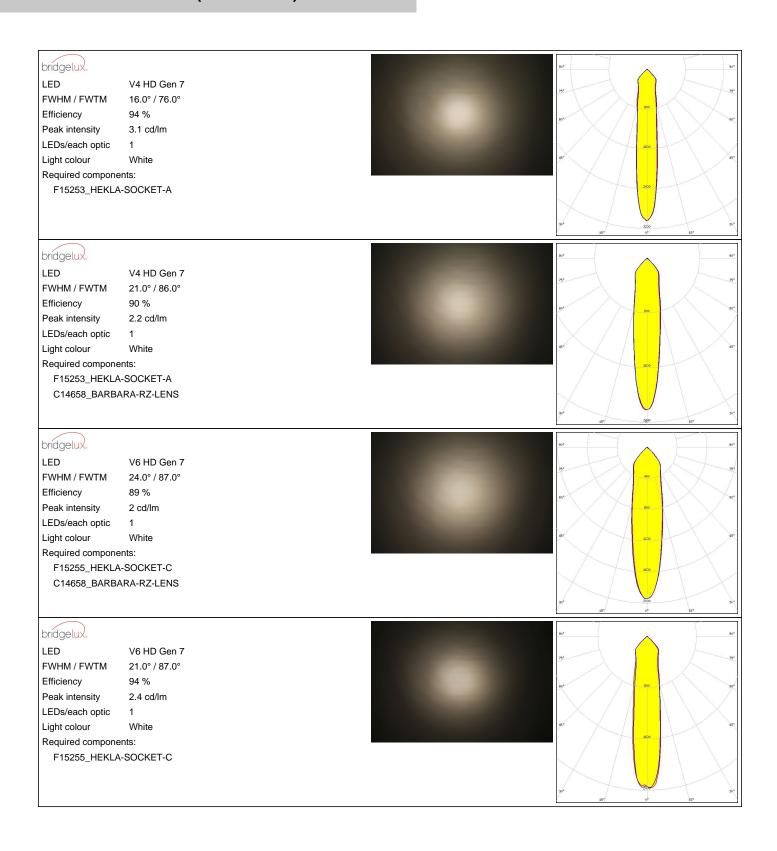




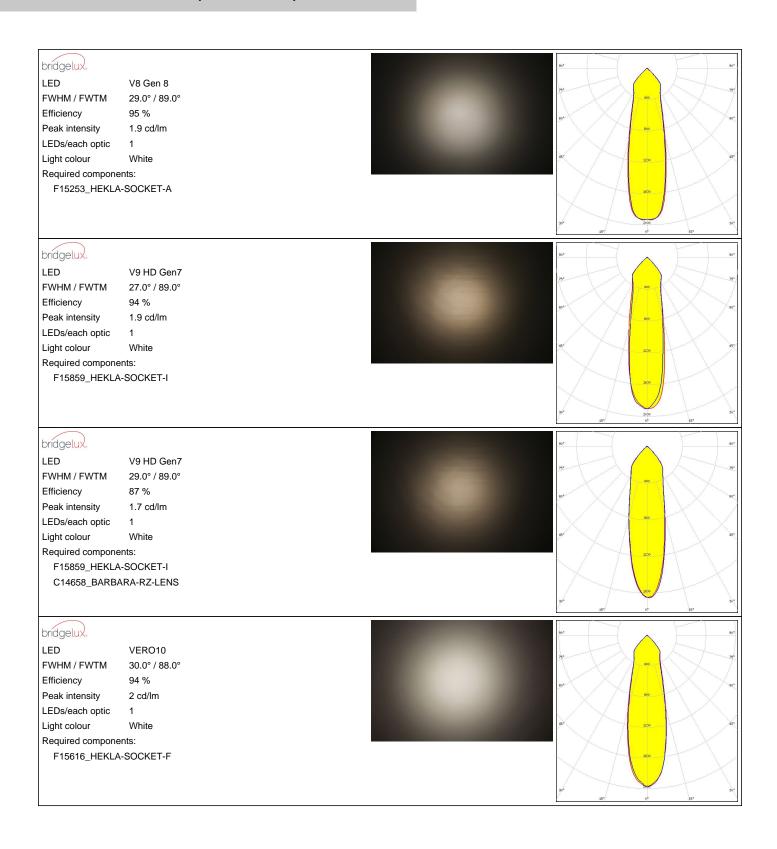




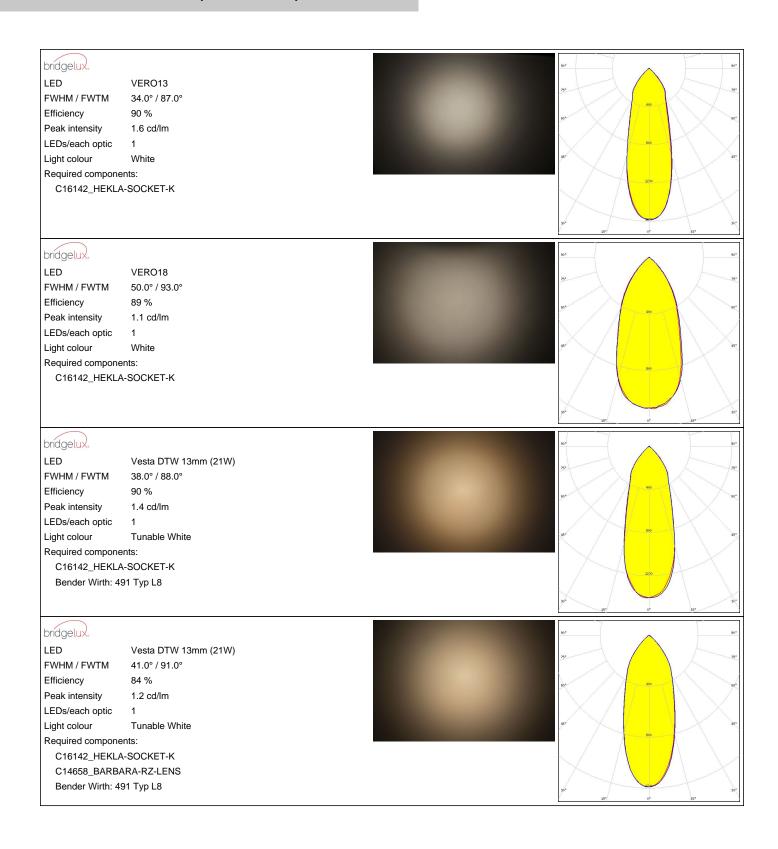



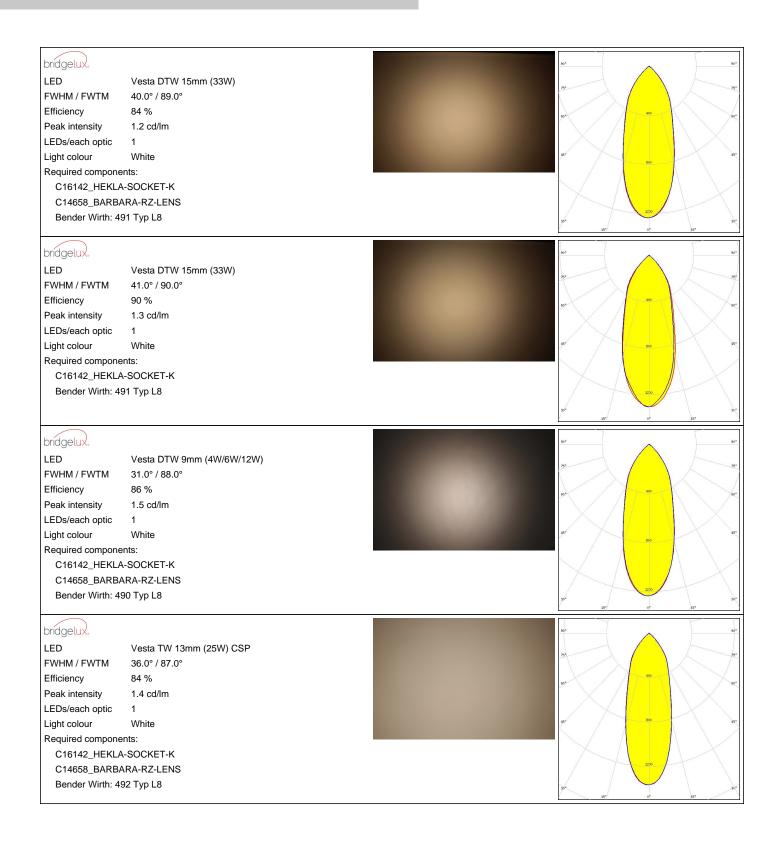



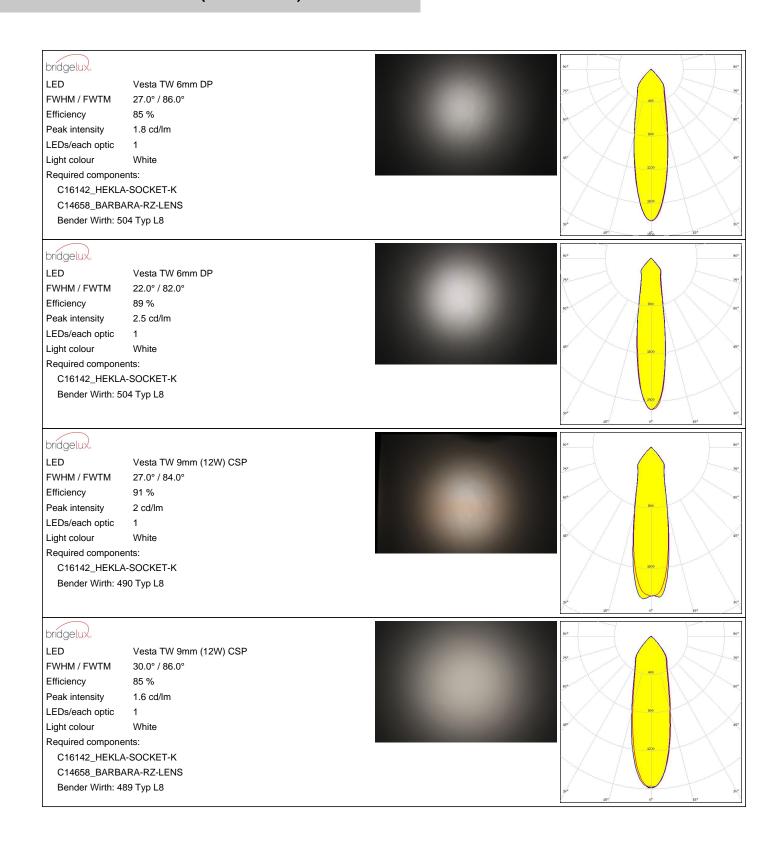



Required components:

F15255_HEKLA-SOCKET-C

CITIZEN CLC020 Series (Dim-To-Warm) FWHM / FWTM 31.0° / 86.0° Efficiency 84 % Peak intensity 1.6 cd/lm LEDs/each optic Light colour White Required components: C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 487 Typ L8 **CITIZEN** LED CLC030 Series (Dim-To-Warm) FWHM / FWTM 41.0° / 90.0° Efficiency 82 % Peak intensity 1.2 cd/lm LEDs/each optic 1 White Light colour Required components: C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 436 Typ L8 LED CLC030 Series (Dim-To-Warm) FWHM / FWTM 38.0° / 88.0° Efficiency 88 % Peak intensity 1.4 cd/lm LEDs/each optic Light colour White Required components: C16142_HEKLA-SOCKET-K **CITIZEN** CLU700/701/702/703 FWHM / FWTM 23.0° / 84.0° Efficiency 94 % Peak intensity 2.6 cd/lm LEDs/each optic White Light colour




CITIZEN

LED CLU700/701/702/703

FWHM / FWTM 26.0° / 85.0°
Efficiency 91 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C C14658_BARBARA-RZ-LENS

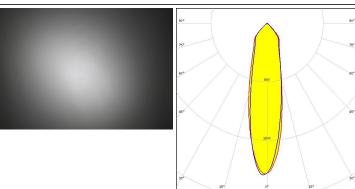


CITIZEN

LED CLU7A2/7A3 FWHM / FWTM 16.0° / 68.0°

Efficiency 94 %
Peak intensity 3.2 cd/lm
LEDs/each optic 1
Light colour White

F15255_HEKLA-SOCKET-C

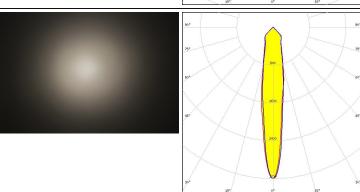


CITIZEN

Required components:

LED LCN-C01B (Tunable White)

FWHM / FWTM 29.0° / 85.0°
Efficiency 86 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 481 Typ L8

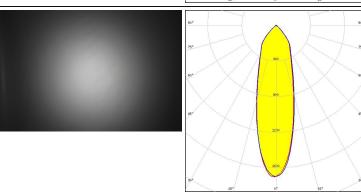


CITIZEN


LED LCN-C02B (Tunable White)

FWHM / FWTM 36.0° / 87.0°
Efficiency 90 %
Peak intensity 1.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:


equired components:
C16142_HEKLA-SOCKET-K

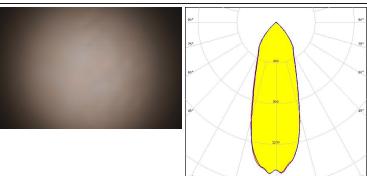




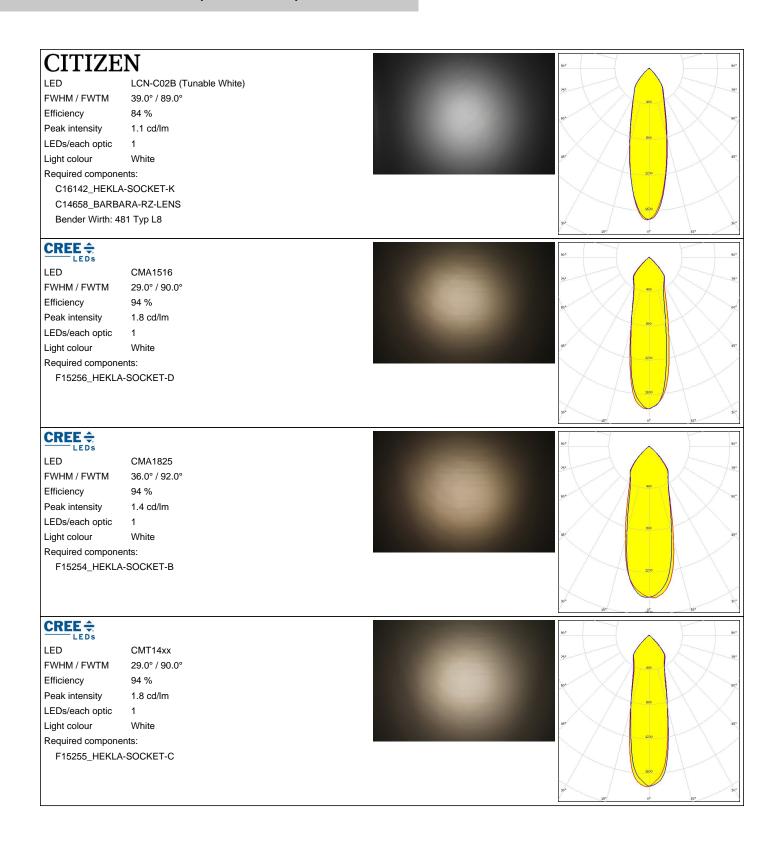




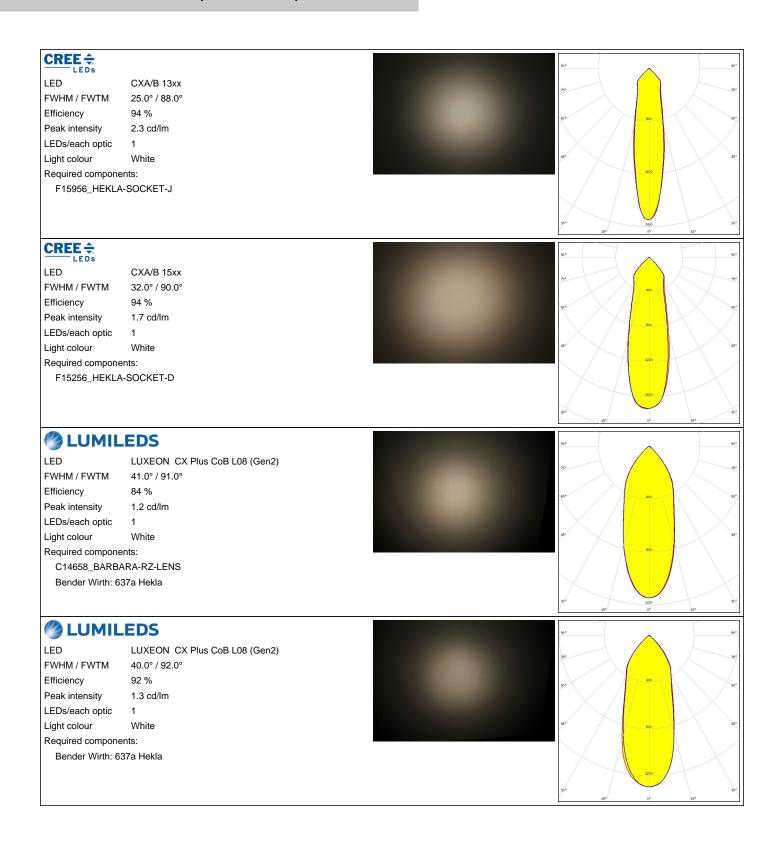




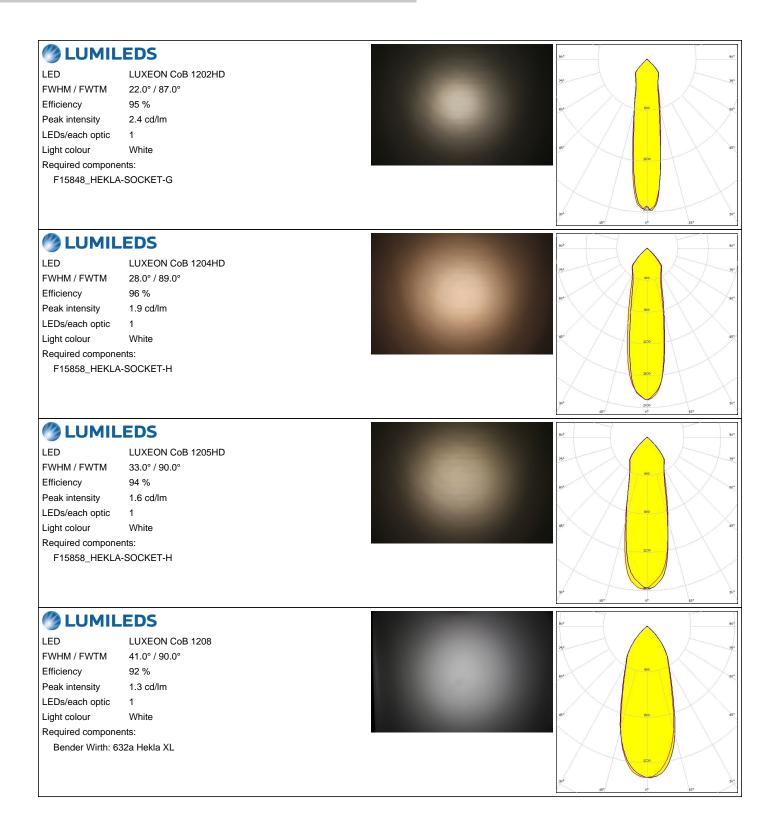




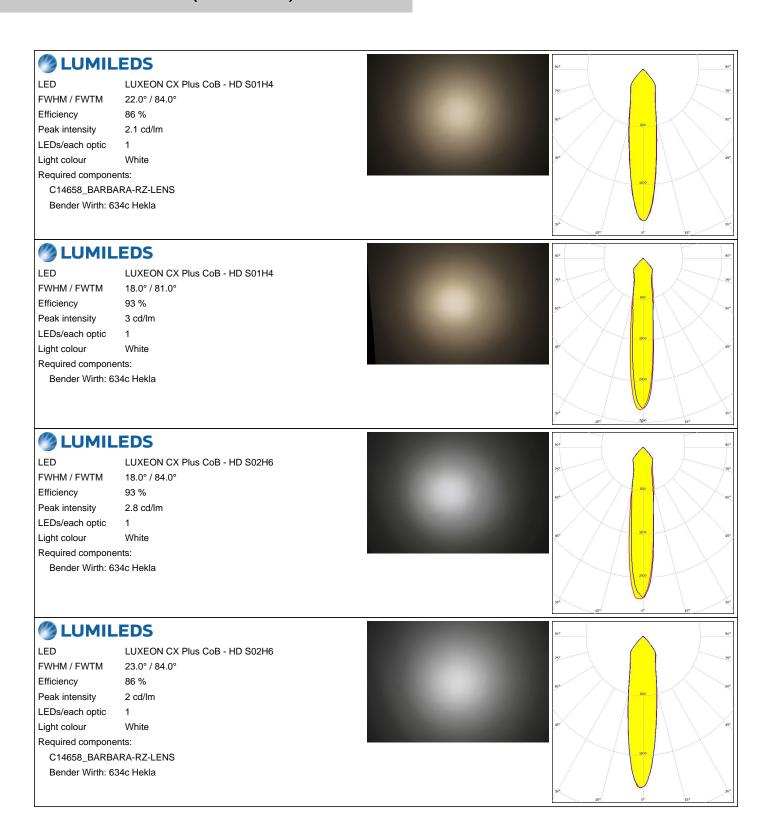




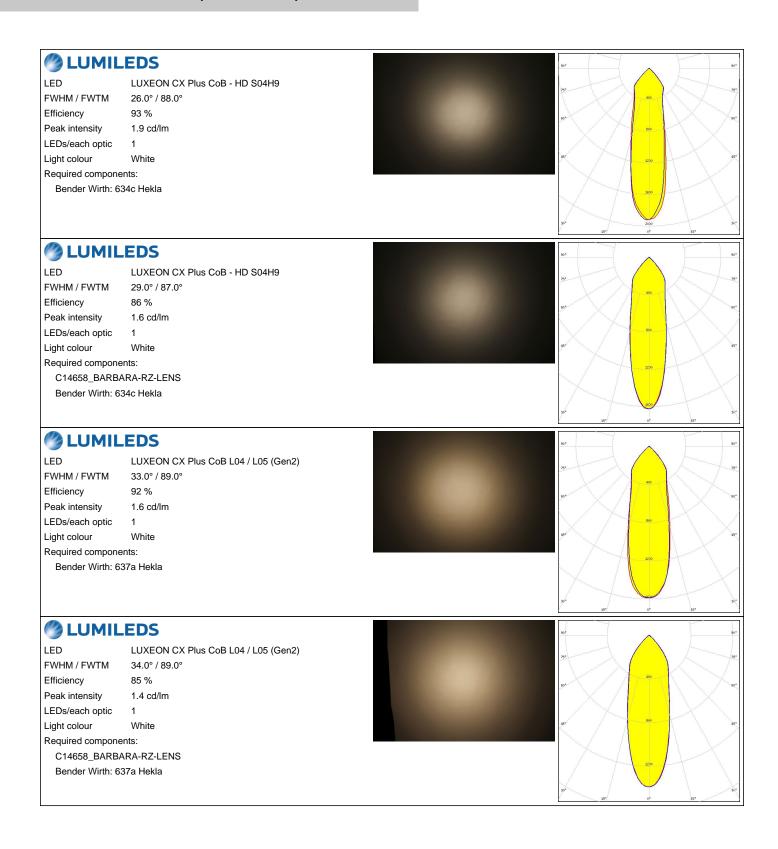



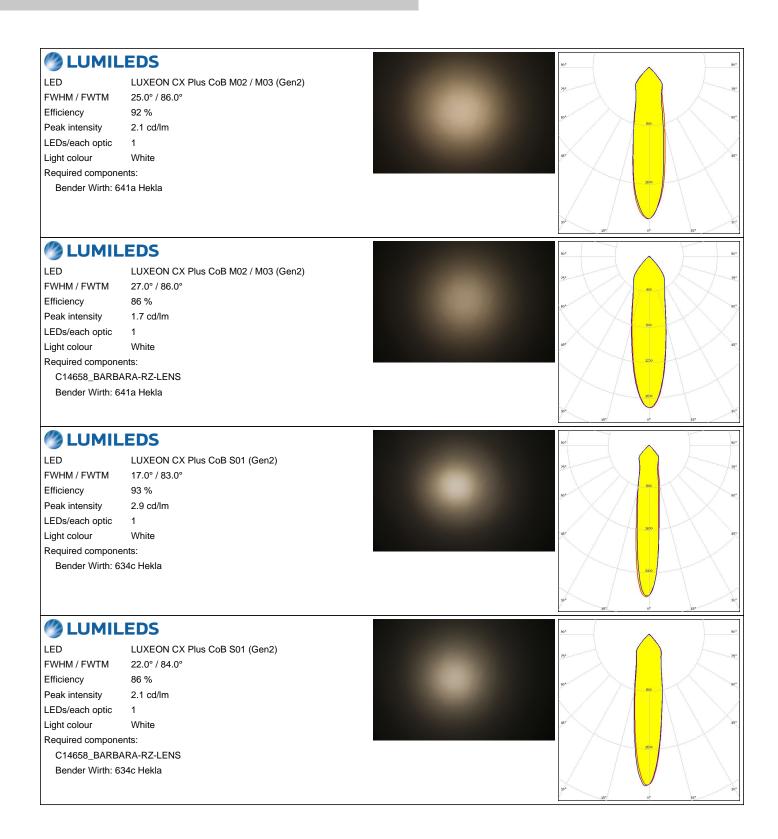




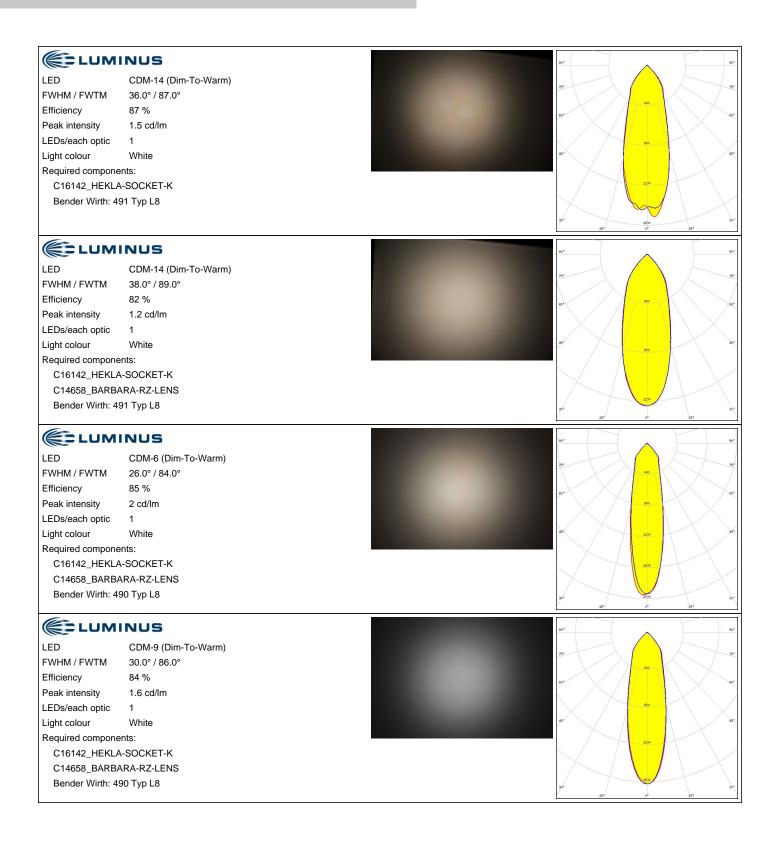


17/32



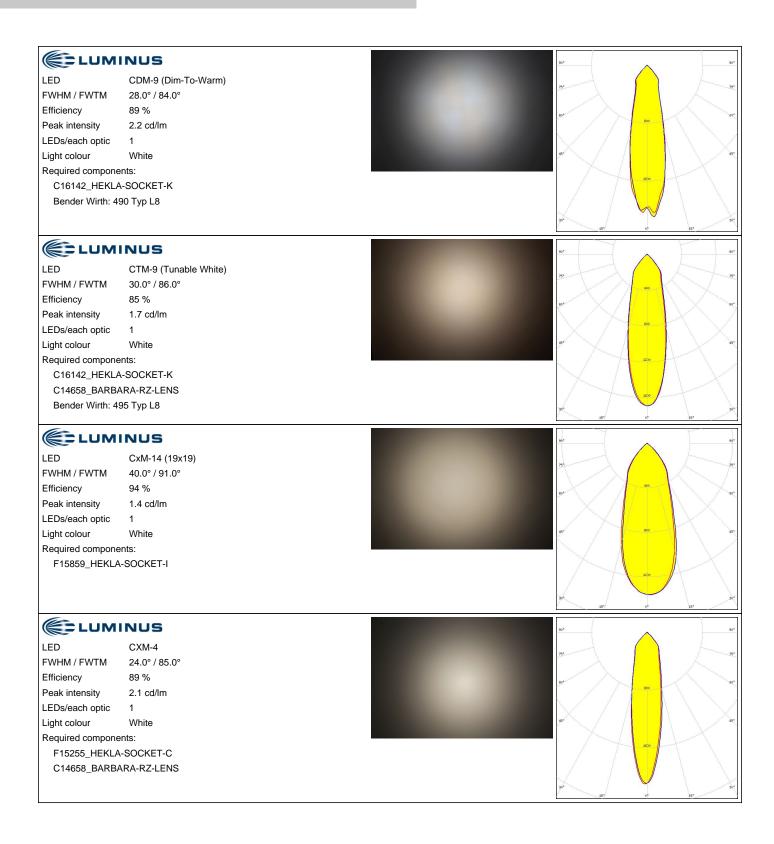


18/32



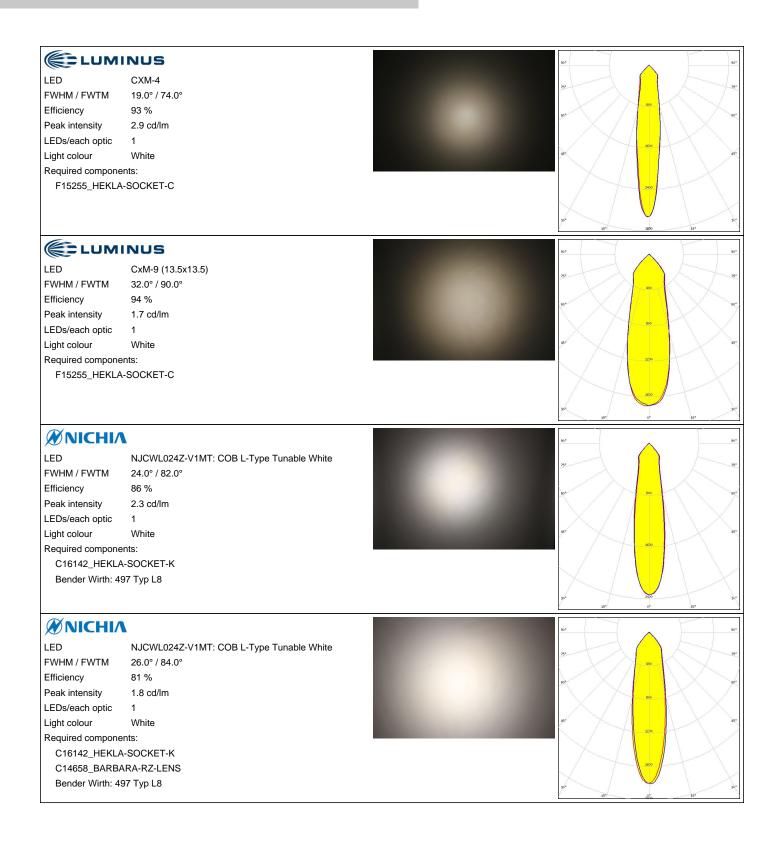



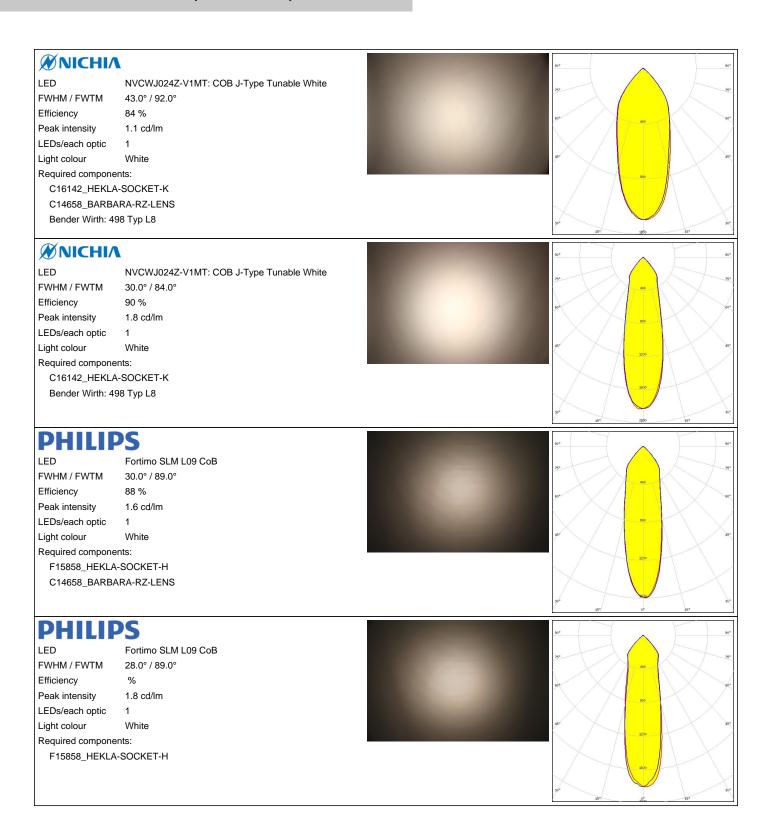



PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 39.0° / 90.0°
Efficiency 84 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White

Required components: C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS

Bender Wirth: 432 Typ L8



PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 36.0° / 89.0°

Efficiency 89 %

Peak intensity 1.4 cd/lm

LEDs/each optic 1

Light colour White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8



SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 28.0° / 87.0°
Efficiency 94 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour White
Required components:


F15255_HEKLA-SOCKET-C

SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 28.0° / 87.0°
Efficiency 94 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C








SAMSUNG

LC010C G2 FWHM / FWTM 23.0° / 86.0° Efficiency 93 % Peak intensity 2.4 cd/lm LEDs/each optic Light colour White Required components:

F15255_HEKLA-SOCKET-C

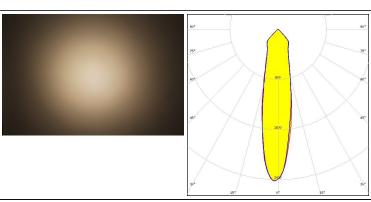

SAMSUNG


LC010T (Tunable White) LED

FWHM / FWTM 27.0° / 84.0° Efficiency 90 % Peak intensity 2.1 cd/lm LEDs/each optic 1

Tunable White Light colour

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 501 Typ L8

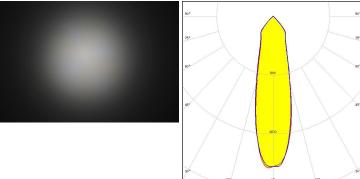

SAMSUNG


LED LC010T (Tunable White)

FWHM / FWTM 30.0° / 85.0° Efficiency 86 % Peak intensity 1.7 cd/lm LEDs/each optic

Light colour Tunable White

Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 501 Typ L8

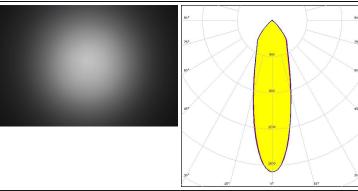


SAMSUNG


LC020C G2 FWHM / FWTM 31.0° / 88.0° Efficiency 94 % Peak intensity 1.8 cd/lm

LEDs/each optic White Light colour Required components:


F15859_HEKLA-SOCKET-I

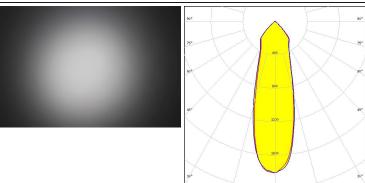



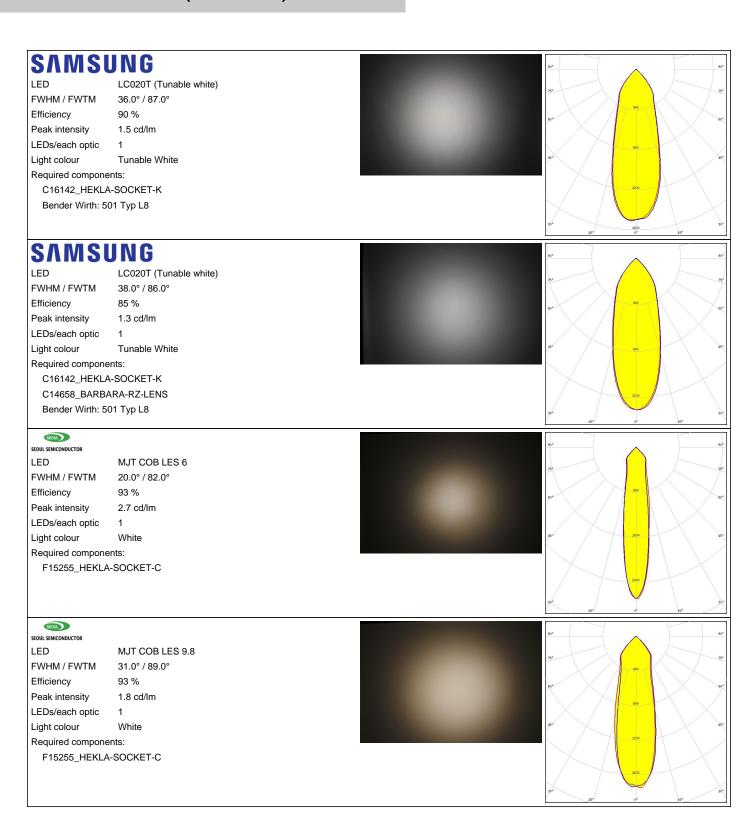




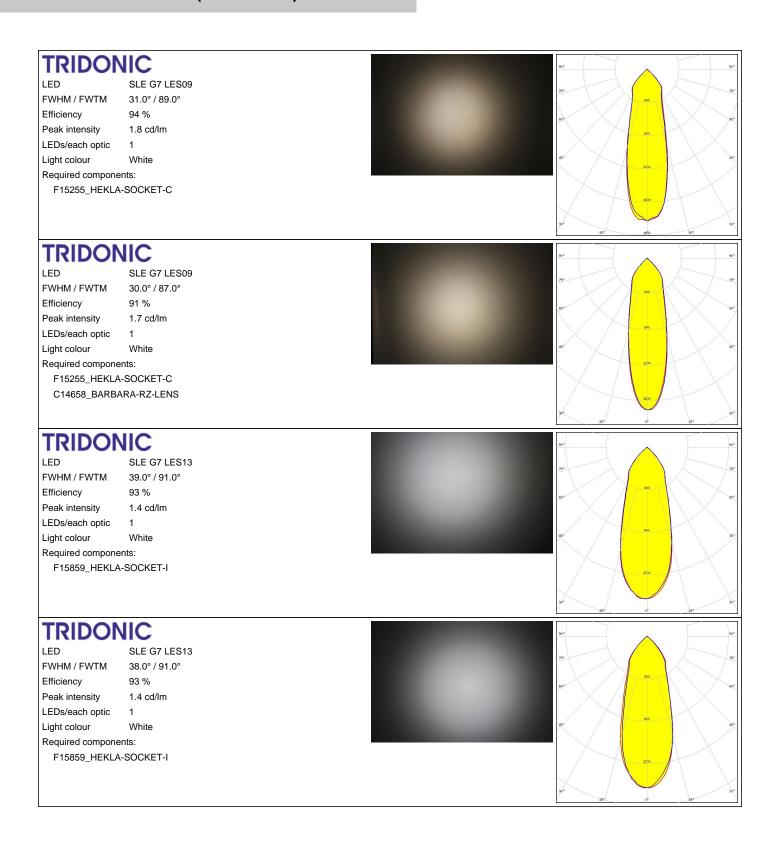

24/32



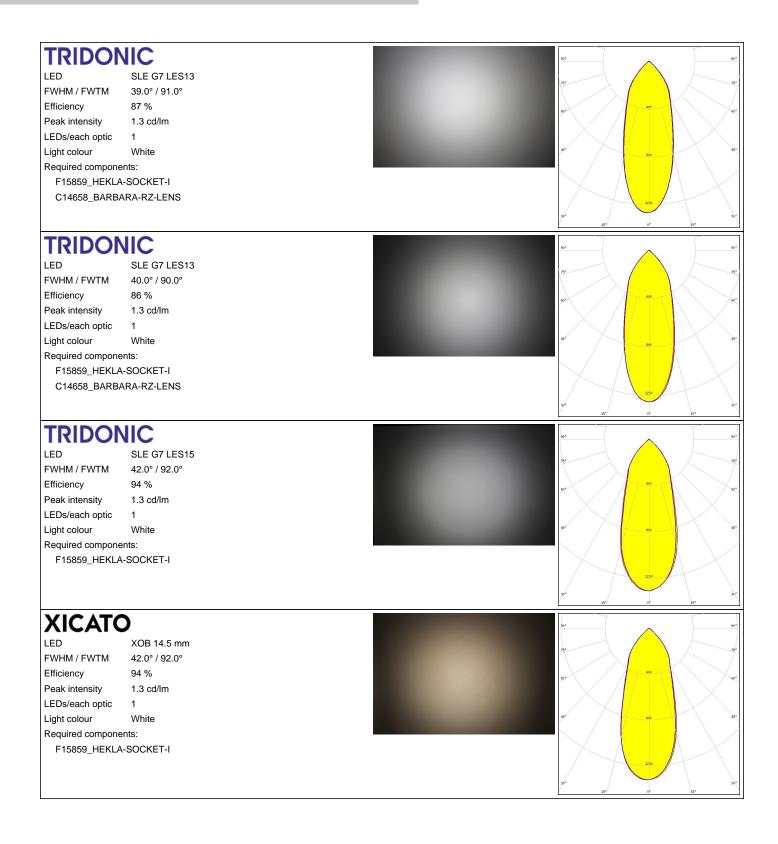




XICATO

XOB 6 mm $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 27.0° / 86.0° Efficiency 88 % Peak intensity 1.9 cd/lm LEDs/each optic Light colour White Required components:

F15255_HEKLA-SOCKET-C C14658_BARBARA-RZ-LENS

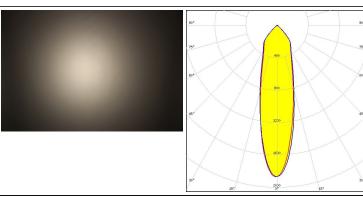

XICATO

LED XOB 6 mm FWHM / FWTM 25.0° / 87.0° Efficiency 94 % Peak intensity 2.3 cd/lm LEDs/each optic 1 White Light colour


Required components: F15255_HEKLA-SOCKET-C



XICATO

XOB 9.8 mm $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 32.0° / 89.0° Efficiency 89 % Peak intensity 1.6 cd/lm LEDs/each optic Light colour White Required components:

F15255_HEKLA-SOCKET-C C14658_BARBARA-RZ-LENS




XICATO


XOB 9.8 mm FWHM / FWTM 32.0° / 90.0° Efficiency 94 % Peak intensity 1.7 cd/lm LEDs/each optic White Light colour Required components:

F15255_HEKLA-SOCKET-C







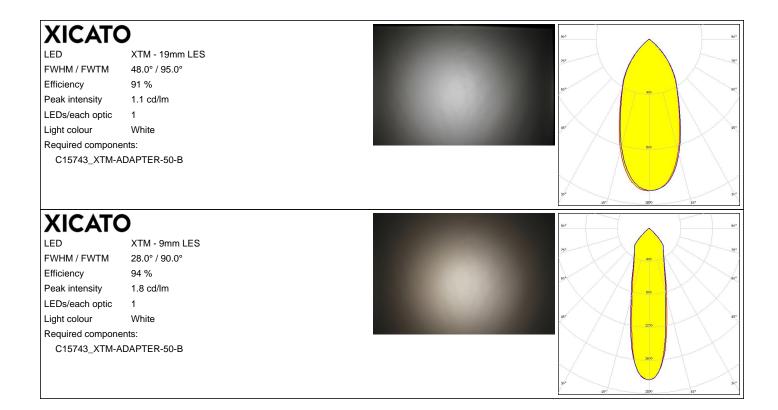






LED V13 Gen6
FWHM / FWTM 28.0° / 80.0°
Efficiency 91 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F14988_HEKLA-SOCKET-E



bridgelux

LED V8 Gen6
FWHM / FWTM 25.0°
Efficiency 0 %
LEDs/each optic 1
Light colour White
Required components:
F15253_HEKLA-SOCKET-A

bridgelux.

LED V8 Gen6
FWHM / FWTM 25.0°
Efficiency %
LEDs/each optic 1
Light colour White
Required components:

F15253_HEKLA-SOCKET-A

bridgelux.

 LED
 V8 Gen7

 FWHM / FWTM
 24.0° / 83.0°

 Efficiency
 92 %


 Peak intensity
 2.5 cd/lm

 LEDs/each optic
 1

 Light colour
 White

 Required components:

 F15253_HEKLA-SOCKET-A






bridgelux

LED Vesta TW 9mm (9W) DP

FWHM / FWTM 28.0° / 84.0°
Efficiency 87 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 489 Typ L8



CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM / FWTM 26.0° / 78.0°

Efficiency %
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C


CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM / FWTM 26.0° / 81.0°
Efficiency 92 %
Peak intensity 2.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255_HEKLA-SOCKET-C



CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM / FWTM 26.0°
Efficiency 0 %
LEDs/each optic 1
Light colour White


Required components:

F15255_HEKLA-SOCKET-C



CITIZEN

LED CLL03x/CLU03x
FWHM / FWTM 36.0° / 87.0°
Efficiency 93 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I



CREE \$

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM / FWTM 31.0°
Efficiency 0 %
LEDs/each optic 1
Light colour White
Required components:

F15254_HEKLA-SOCKET-B

CREE -

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM / FWTM 31.0°
Efficiency %
LEDs/each optic 1
Light colour White


Required components:

F15254_HEKLA-SOCKET-B

LUMINUS

LED CxM-6 (13.5x13.5)
FWHM / FWTM 22.0° / 56.0°
Efficiency 93 %
Peak intensity 3.1 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17435_HEKLA-G2-C






WNICHIA

LED COB L-Type (LES 11)

FWHM / FWTM 28.0° / 82.0°
Efficiency 93 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15858_HEKLA-SOCKET-H



WNICHIA

LED COB L-Type (LES 9)

FWHM / FWTM 26.0° / 80.0°

Efficiency 93 %


Peak intensity 2.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:

F15858_HEKLA-SOCKET-H




WNICHIA

LED COB T-Type FWHM / FWTM 24.0° / 77.0°

Efficiency 90 %
Peak intensity 2.7 cd/lm
LEDs/each optic 1

Light colour White Required components:

F15848_HEKLA-SOCKET-G




WNICHIA

LED NFSWE11A

FWHM / FWTM 24.0° / 64.0°
Efficiency 86 %
Peak intensity 2.6 cd/lm
LEDs/each optic 30
Light colour White

C16142_HEKLA-SOCKET-K

Required components:





OSRAM

 LED
 Soleriq S13 19x19

 FWHM / FWTM
 28.2° / 81.4°


 Efficiency
 93 %

 Peak intensity
 2.2 cd/lm

LEDs/each optic 1
Light colour White

Required components:

F15859_HEKLA-SOCKET-I




OSRAM

Opto Semiconductor

LED Soleriq S9
FWHM / FWTM 25.7° / 80.8°
Efficiency 93 %
Peak intensity 2.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255_HEKLA-SOCKET-C




SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 35.0° / 86.5°
Efficiency 88 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15859_HEKLA-SOCKET-I





PRODUCT DATASHEET F14739 BROOKE-G2-M

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

32/32

www.ledil.com/ where_to_buy