

Data sheet

15474.2 WE-4-DO



Webeasy I/O digital output module, 4 relay outputs 1 W, 250 V, 16 A (inrush 80 A), With LED display, Mounting type: Mounting rail TS 35, Supply voltage range: 20 V - 28 VAC/DC

Business data

Article number	15474.2
Article name	WE-4-DO
GTIN (EAN)	4044211124182
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	154 g
Weight per piece (including packaging)	194 g
Unit of weight	G
Customs number	85423190
Country of origin	NL
Product description	Controller module

Data sheet

15474.2 WE-4-DO

Technical data

BUS data

Bus-Topologie / Kabellänge max.	multidrop line / 500m
Datenübertragungsrate / Bus-Teilnehmer max.	19k2 bps / 64
Bus protocol / interface	Modbus RTU / RS485, halb duplex, nicht isoliert

Dimensions

Length	95 mm
Width	53 mm
Height	60 mm

Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	6 mm
Torque	0.4 Nm



Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

Data sheet

15474.2 WE-4-DO

Media

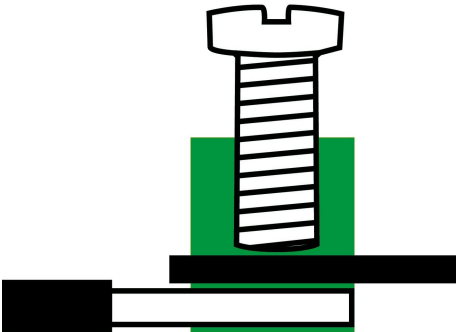

Accessories
