

RONDA-O-C

~50° + 30° oval beam with holder C compatible with LEDiL HEKLA

SPECIFICATION:

Dimensions Ø 53.9 mm
Height 20.5 mm
Fastening socket
ROHS compliant yes ①



MATERIALS:

ComponentTypeMaterialColourFinishF15990_RONDA-OSingle lensPMMAclearF15635_RONDA-HLD-CHolderPCwhite

ORDERING INFORMATION:

Quantities for one set:

Single lens 1 Holder 1




PRODUCT DATASHEET RONDA-O-C

Component		Qty in box	MOQ	MPQ	Box weight (kg)
F15990_RONDA-O » Box size: 480 x 280 x 300 mm	Single lens	420	120	30	6.5
F15635_RONDA-HLD-C » Box size: 480 x 280 x 300 mm	Holder	420	120	30	4.1

2/20




PRODUCT DATASHEET RONDA-O-C

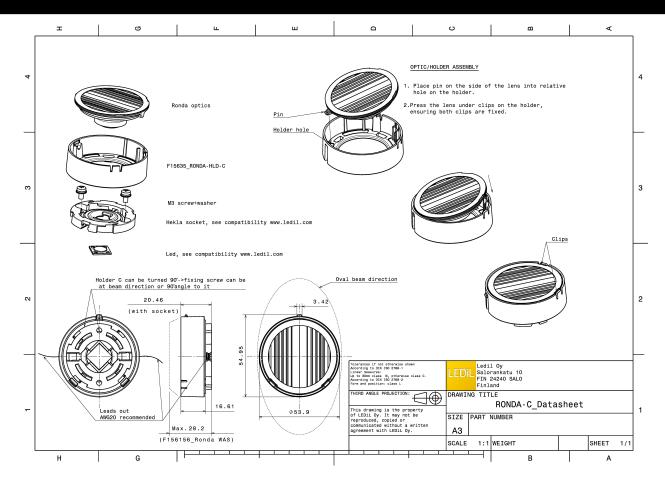


See also our general installation guide: www.ledil.com/installation_guide



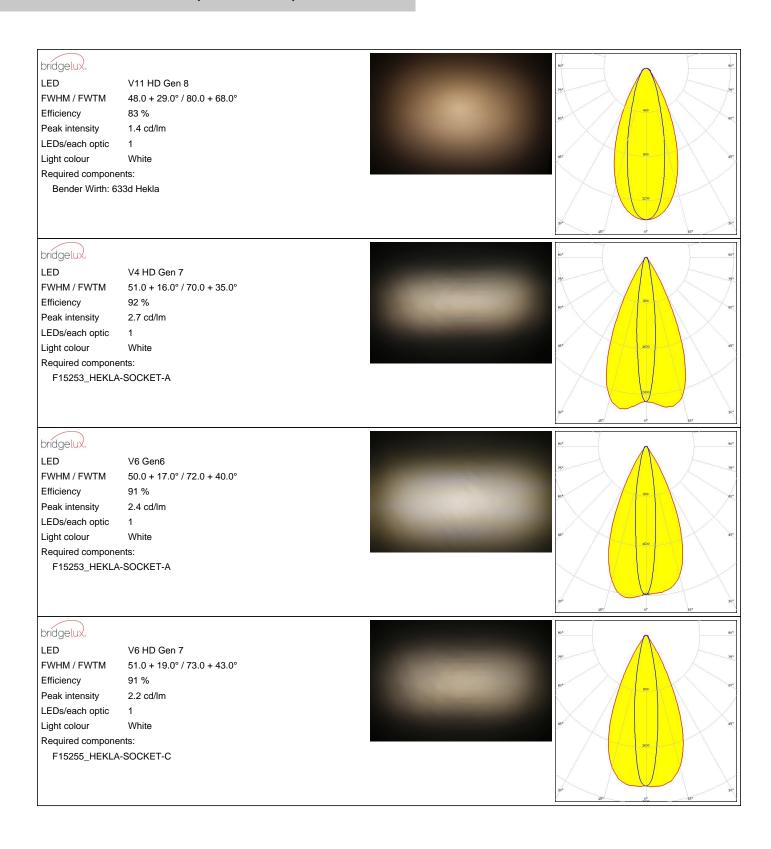



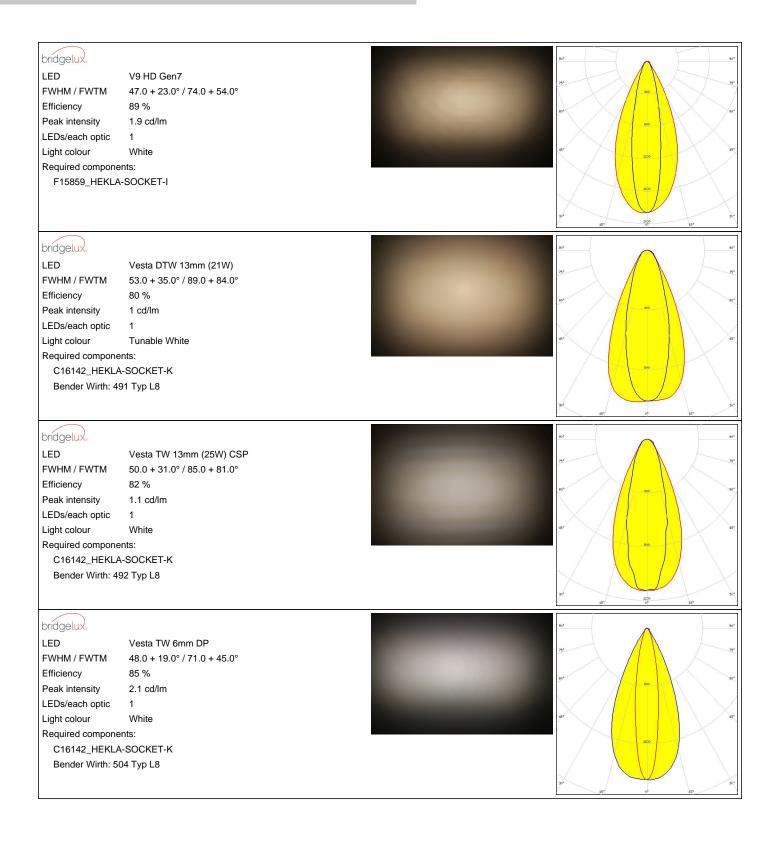




bridgelux

LED Vesta TW 9mm (12W) CSP FWHM / FWTM 44.0 + 25.0° / 73.0 + 64.0°

Efficiency 85 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K

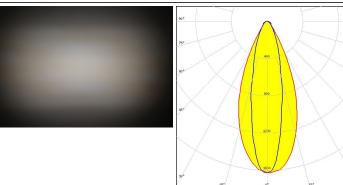


CITIZEN

LED CLC020 Series (Dim-To-Warm)
FWHM / FWTM 29.0 + 23.0° / 72.0 + 57.0°

Efficiency 84 %
Peak intensity 1.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K

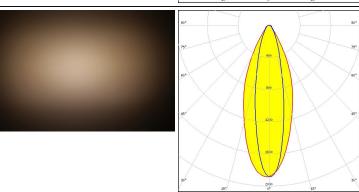


CITIZEN

LED CLL02x/CLU02x (LES10) FWHM / FWTM 47.0 + 24.0° / 75.0 + 58.0°

Efficiency 88 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C

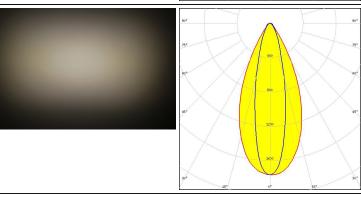


CITIZEN

LED CLU700/701/702/703

FWHM / FWTM 50.0 + 18.0° / 71.0 + 43.0°

Efficiency 90 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C





CITIZEN CLU7A2/7A3 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ $49.0 + 14.0^{\circ} / 68.0 + 31.0^{\circ}$ Efficiency 91 % Peak intensity 3 cd/lm LEDs/each optic Light colour White Required components: F15255_HEKLA-SOCKET-C CREE \$ LED CMA1516 FWHM / FWTM 49.0 + 25.0° / 76.0 + 57.0° Efficiency 91 % Peak intensity 1.8 cd/lm LEDs/each optic 1 White Light colour Required components: F15256_HEKLA-SOCKET-D CREE + LED CMA1825 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 51.0 + 33.0° / 83.0 + 76.0° Efficiency 88 % Peak intensity 1.3 cd/lm LEDs/each optic Light colour White Required components: F15254_HEKLA-SOCKET-B CREE & CMT14xx FWHM / FWTM 48.0 + 26.0° / 77.0 + 60.0°

90 %

White

1.7 cd/lm

Efficiency

Peak intensity


Light colour

LEDs/each optic


Required components:

F15255_HEKLA-SOCKET-C




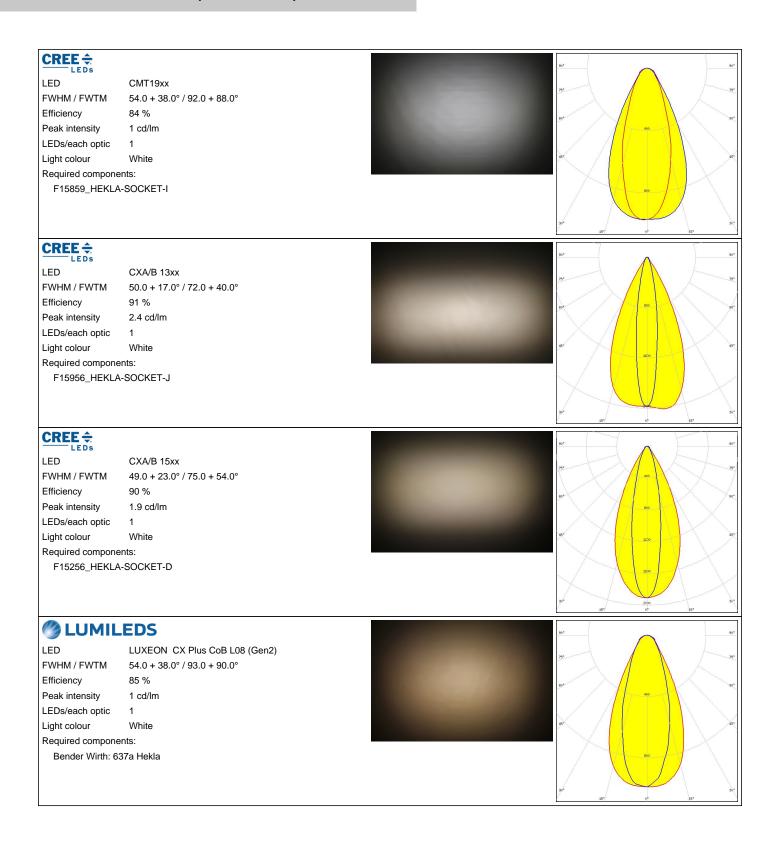




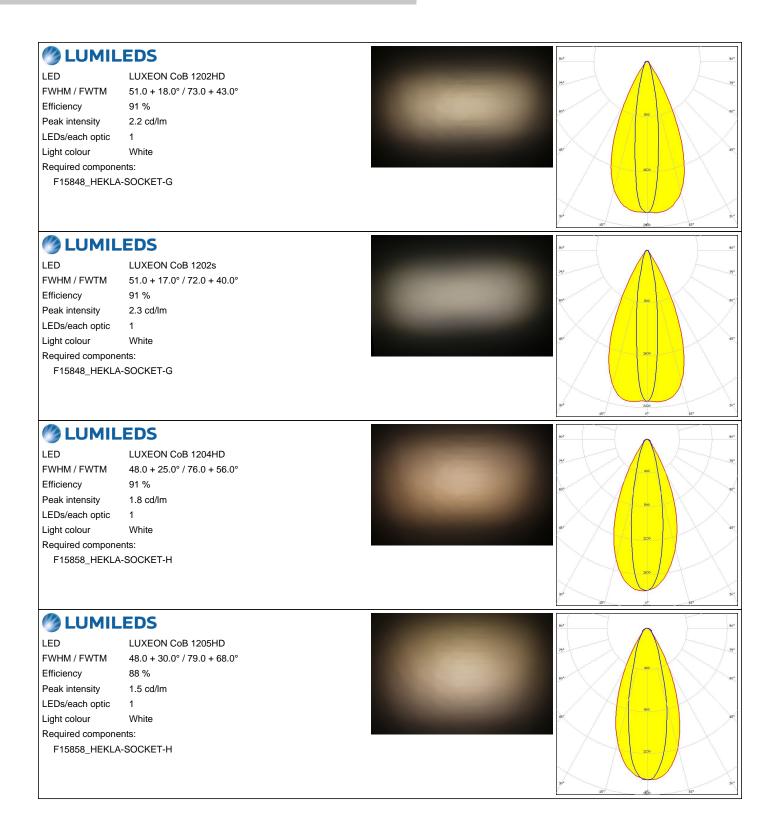




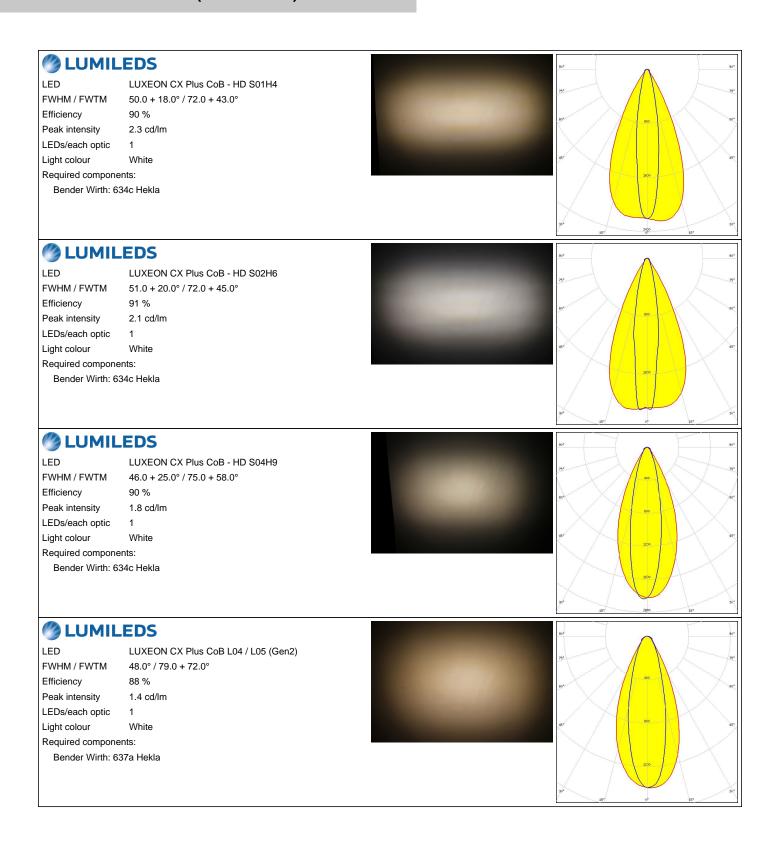



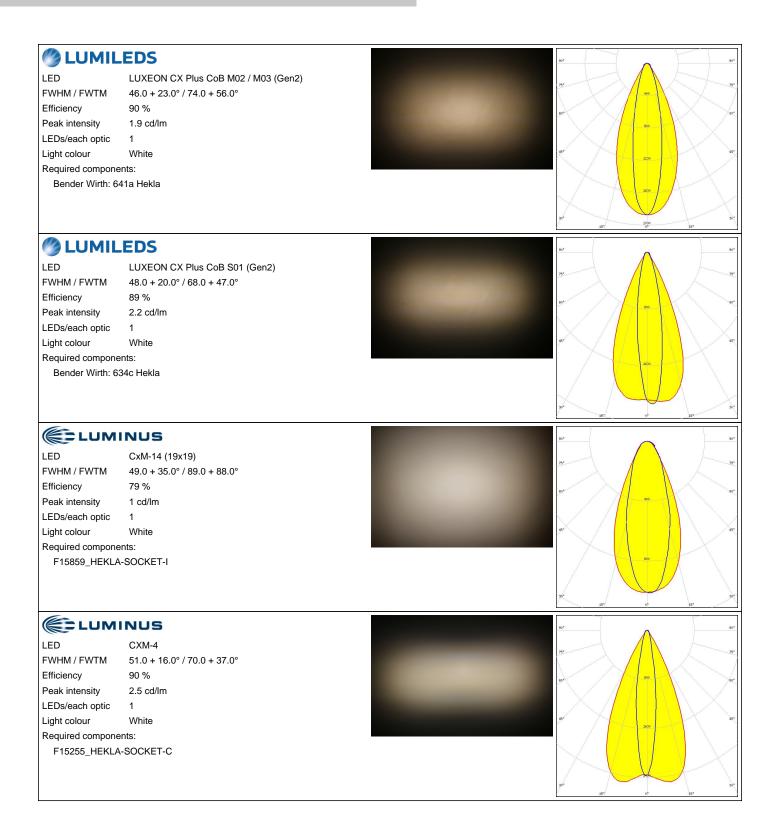



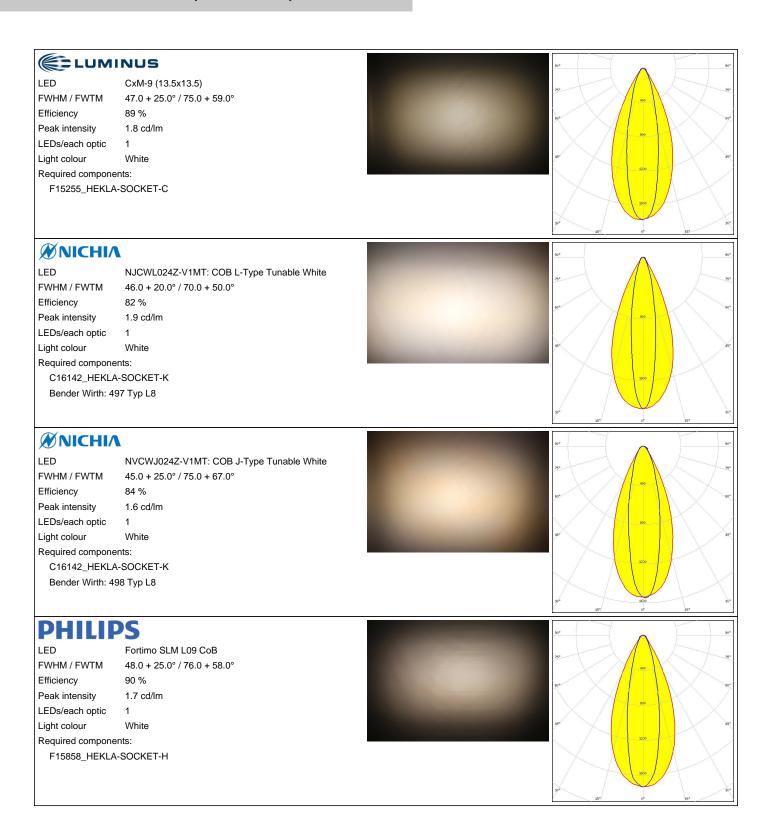




PHILIPS

LED Fortimo SLM L13 CoB FWHM / FWTM 41.0 + 45.0° / 90.0 + 89.0°

Efficiency 83 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8

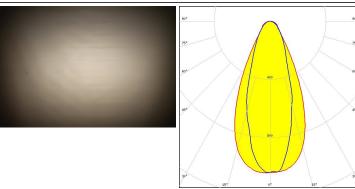


SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 48.0 + 25.0° / 76.0 + 60.0°

Efficiency 89 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C

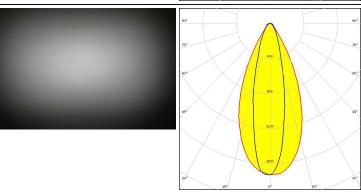


SAMSUNG

LED LC010C

FWHM / FWTM 52.0 + 18.0° / 74.0 + 44.0°

Efficiency 90 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15848_HEKLA-SOCKET-G

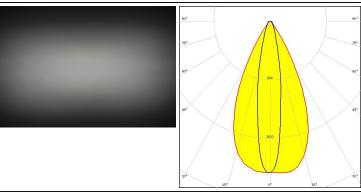


SAMSUNG

LED LC010C G2

FWHM / FWTM 50.0 + 17.0° / 71.0 + 41.0°

Efficiency 89 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C








SAMSUNG

LC016D / LC019D / LC026D / LC033D

FWHM / FWTM $55.0 + 37.0^{\circ} / 94.0 + 89.0^{\circ}$

Efficiency 82 % Peak intensity 1 cd/lm LEDs/each optic Light colour White Required components: F15859_HEKLA-SOCKET-I

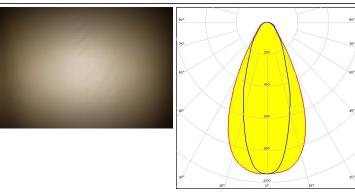


SAMSUNG

LED LC020C

FWHM / FWTM 49.0 + 22.0° / 75.0 + 52.0°

Efficiency 90 % Peak intensity 1.9 cd/lm LEDs/each optic 1 White Light colour Required components:

F15848_HEKLA-SOCKET-G

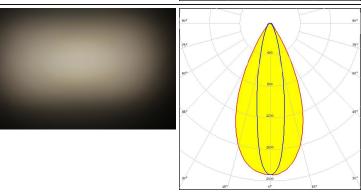


SAMSUNG

LC020C G2

FWHM / FWTM $47.0 + 23.0^{\circ} / 74.0 + 55.0^{\circ}$

Efficiency 88 % Peak intensity 1.9 cd/lm LEDs/each optic Light colour White Required components:

F15859_HEKLA-SOCKET-I

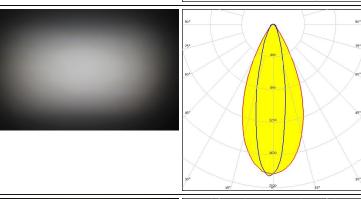


TRIDONIC

SLE G7 LES09

FWHM / FWTM 46.0 + 24.0° / 74.0 + 57.0°

Efficiency 88 % Peak intensity 1.8 cd/lm LEDs/each optic White Light colour Required components: F15255_HEKLA-SOCKET-C

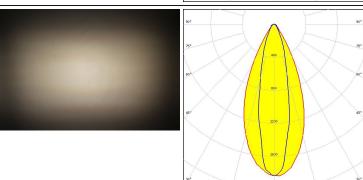




TRIDONIC

LED SLE G7 LES13

FWHM / FWTM 52.0 + 35.0° / 85.0 + 81.0°

Efficiency 84 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15859_HEKLA-SOCKET-I

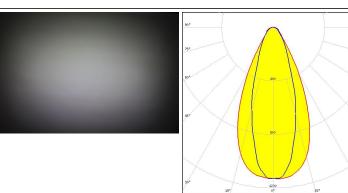


TRIDONIC

LED SLE G7 LES15

FWHM / FWTM 55.0 + 39.0° / 94.0 + 90.0°

Efficiency 83 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15859_HEKLA-SOCKET-I

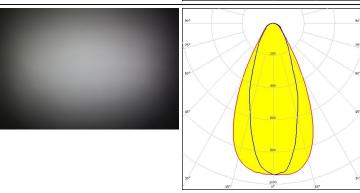


XICATO

LED XOB 14.5 mm

FWHM / FWTM 54.0 + 36.0° / 88.0 + 84.0°

Efficiency 83 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I




XICATO

LED XOB 9.8 mm


FWHM / FWTM 48.0 + 24.0° / 76.0 + 89.0°

Efficiency 89 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C







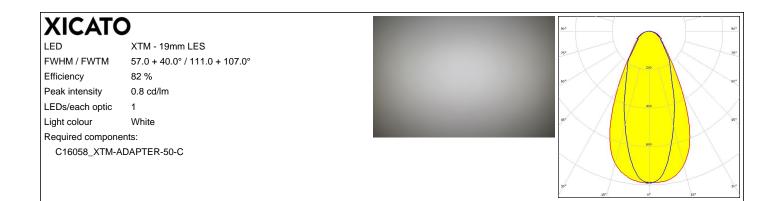



OPTICAL RESULTS (SIMULATED):

bridgelux


LED V10 Gen 8

FWHM / FWTM 24.0 + 45.0° / 56.0 + 73.0°

Efficiency 87 %
Peak intensity 1.9 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255_HEKLA-SOCKET-C




CITIZEN

LED CLL03x/CLU03x

FWHM / FWTM 47.0 + 40.0° / 85.0 + 83.0°

Efficiency 80 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15859_HEKLA-SOCKET-I




CITIZEN


LED CLU7B2

FWHM / FWTM 48.0 + 12.0° / 68.0 + 27.0°

Efficiency 91 %
Peak intensity 3.3 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17435_HEKLA-G2-C






WNICHIA

LED COB T-Type

FWHM / FWTM 28.0 + 47.0° / 40.0 + 71.0°

Efficiency 86 %
Peak intensity 2.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15848_HEKLA-SOCKET-G






OPTICAL RESULTS (SIMULATED):

SAMSUNG 500,0 LC003D / LC006D / LC009D / LC013D coordinate value FWHM / FWTM $44.0 + 27.0^{\circ} / 71.0 + 61.0^{\circ}$ Efficiency 87 % Peak intensity 1.8 cd/lm LEDs/each optic Light colour White Required components: -500,0 -500,0 F17435_HEKLA-G2-C 500,0 X coordinate value **SAMSUNG** LED LC003D / LC006D / LC009D / LC013D coordinate value FWHM / FWTM 44.0 + 26.0° / 71.0 + 58.0° Efficiency 88 % Peak intensity 1.9 cd/lm LEDs/each optic 1 White Light colour Required components: -500,0 -500,0 F17435_HEKLA-G2-C X coordinate value **SAMSUNG** 500,0 LC003D / LC006D / LC009D / LC013D Y coordinate value FWHM / FWTM $46.0 + 18.0^{\circ} / 70.0 + 40.0^{\circ}$ Efficiency 90 % Peak intensity 2.6 cd/lm LEDs/each optic 1 Light colour White Required components: F17435_HEKLA-G2-C X coordinate value **SAMSUNG** LC003D / LC006D / LC009D / LC013D FWHM / FWTM 43.0 + 24.0° / 72.0 + 58.0° Efficiency 87 % Peak intensity 1.9 cd/lm LEDs/each optic White Light colour Required components: F17435_HEKLA-G2-C



OPTICAL RESULTS (SIMULATED):

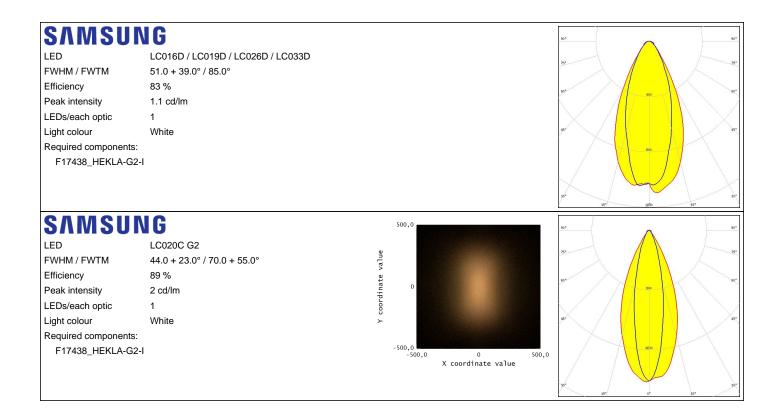



PRODUCT DATASHEET **RONDA-O-C**

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405, Block B **Casic Motor Building** Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where to buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy