

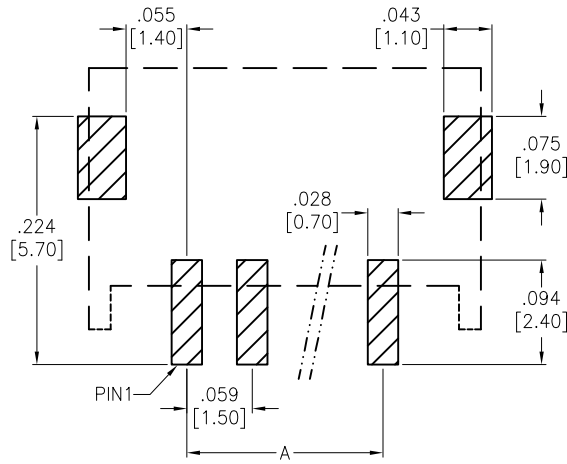
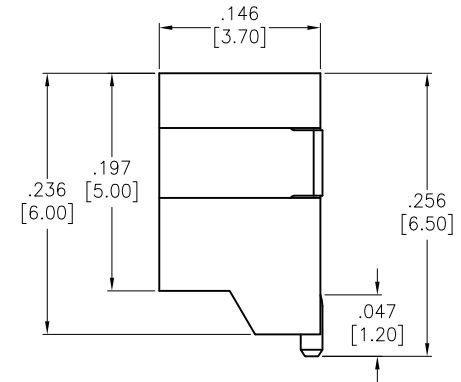


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	01/29/13	
A		REVISED DIM.	3/6/13	
B		UPDATE DRAWING	10/31/19	LH/KL

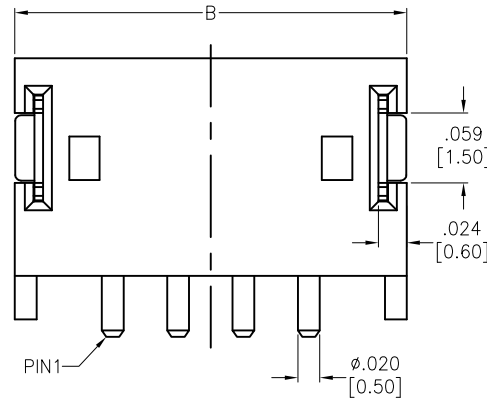

RECOMMENDED PCB LAYOUT

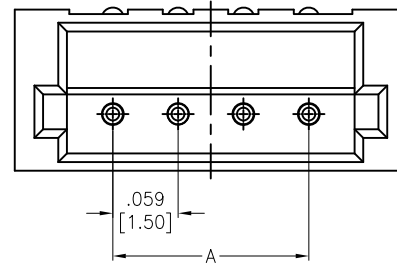

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Ivory
 Contacts: Brass
 Solder Tab: Phosphor Bronze
 Plating:
 Tin over Nickel underplate overall
 Electrical:
 Voltage rating: 50 VAC/DC
 Current rating: 1 Amp (26AWG)
 Contact resistance: 20 mohms max
 Insulation resistance: 500 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Mechanical:
 Applicable Wire: #32~#26AWG
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

Positions: 02 thru 16

A = .059 [1.50] x No. of Spaces

B = .059 [1.50] x No. of Positions + .118 [3.00]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

ADAM TECH INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	TW	01/29/13
CHECKED	CC	01/29/13
APPROVED		

TITLE			
MX1.5mm WAFER 90°, SMT			
SIZE	PART NO.	REV.	
X	15SH-A-XX-TR-SMT-T/R	B	
REF:	S00123T	SCALE:	NTS
		SHEET 1 OF 1	