

MIRELLA-G2-WW

~50° wide beam compatible with LEDiL HEKLA

SPECIFICATION:

Dimensions Ø 49.9 mm
Height 22.6 mm
Fastening socket
ROHS compliant yes ①



MATERIALS:

ComponentTypeMaterialMIRELLA-G2-WWReflectorPC

Colour Finish Coating metal


ORDERING INFORMATION:

Component

F16002_MIRELLA-G2-WW » Box size: 480 x 280 x 300 mm Qty in box MOQ MPQ Box weight (kg) 336 28 3.7




PRODUCT DATASHEET F16002_MIRELLA-G2-WW

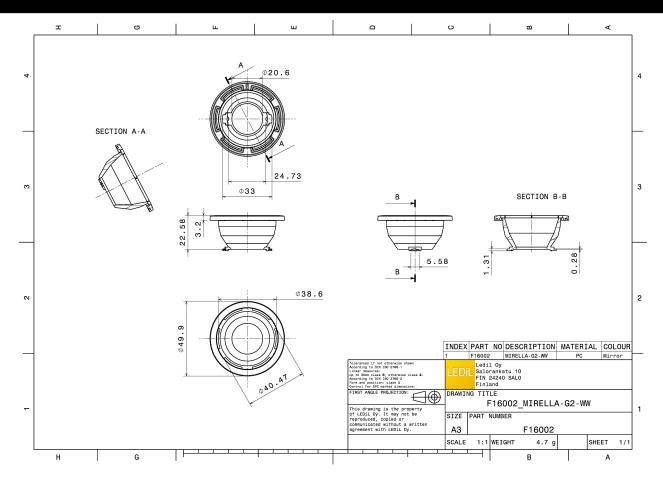


See also our general installation guide: www.ledil.com/installation_guide




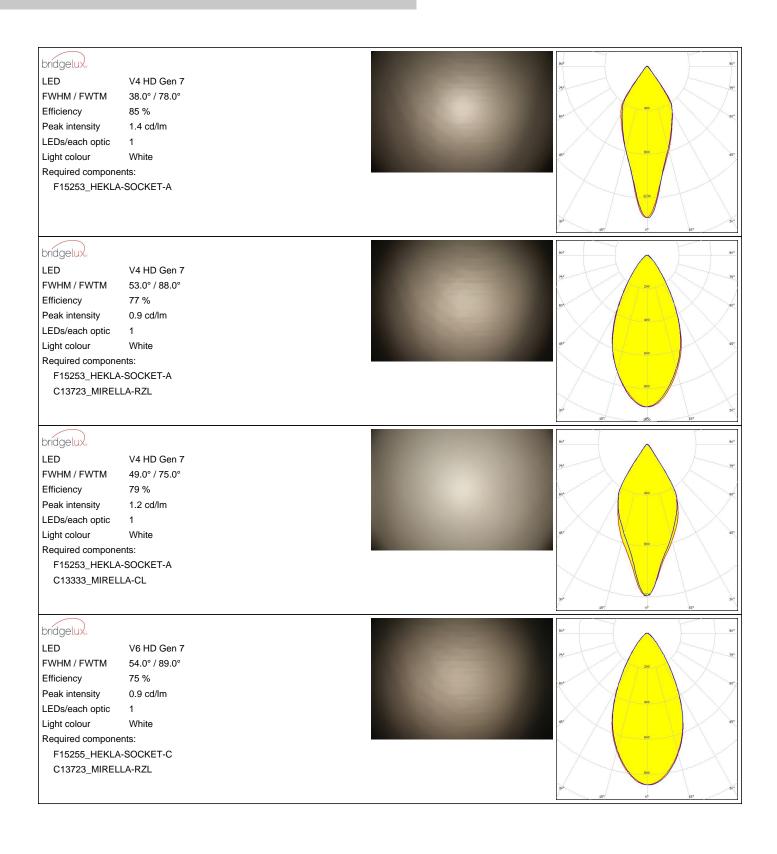




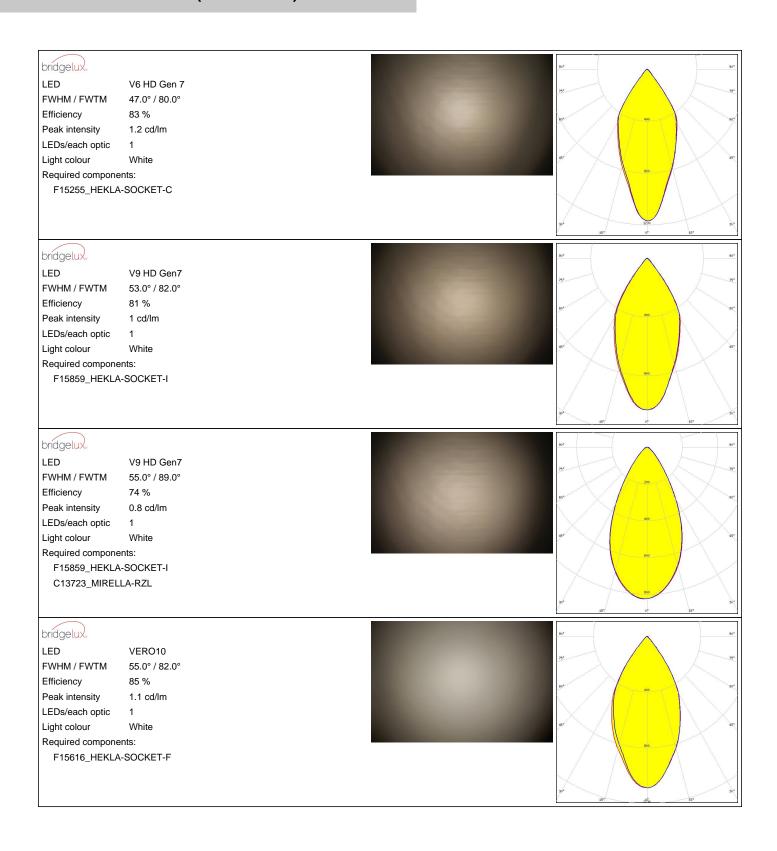



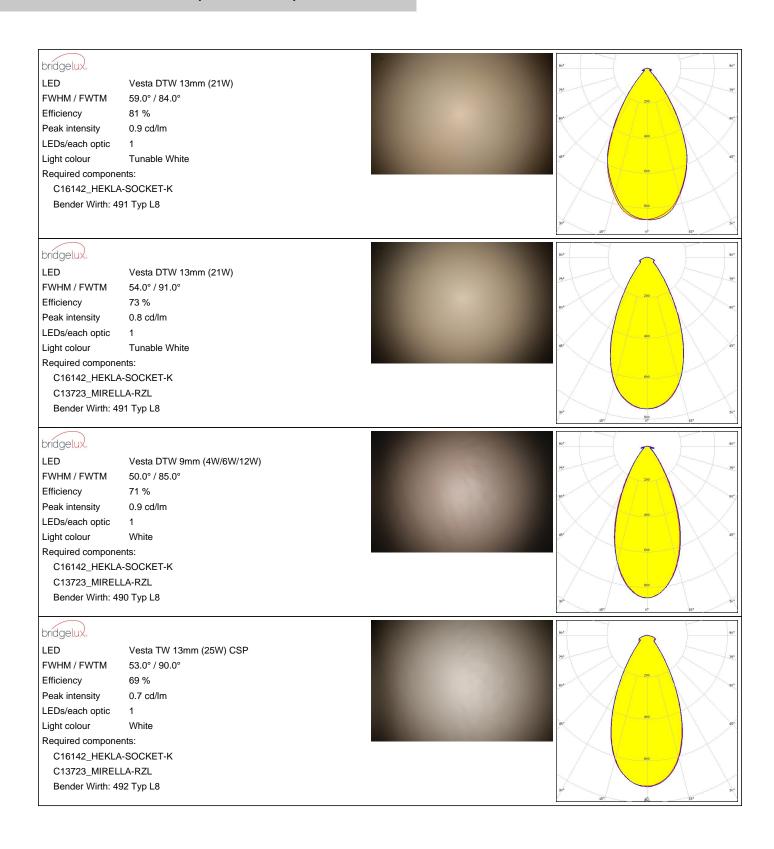



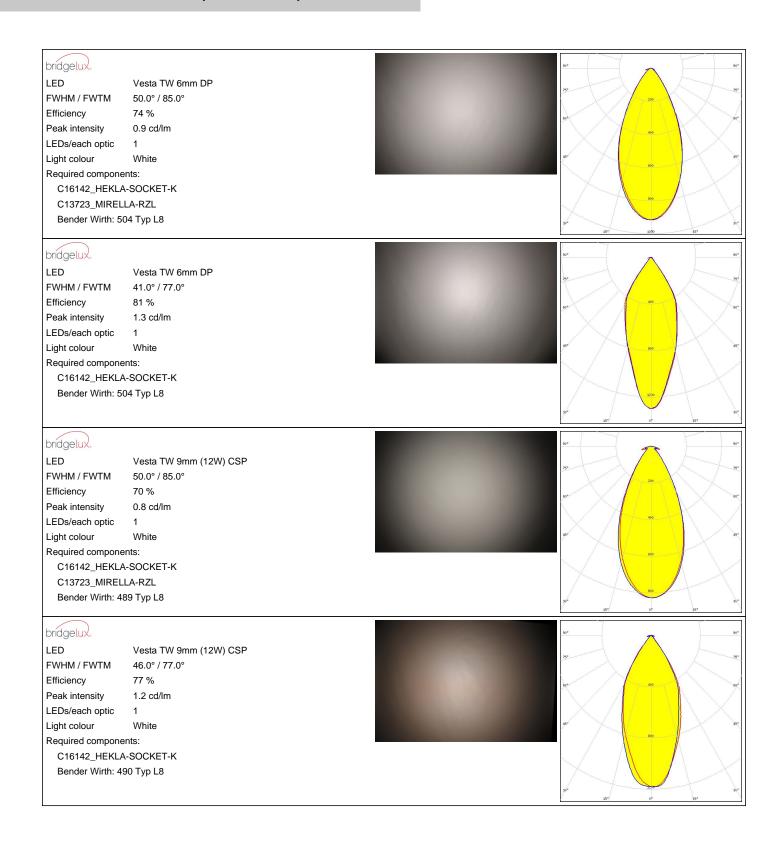




CITIZEN CL

LED CLC020 Series (Dim-To-Warm)

FWHM / FWTM 49.0° / 78.0°
Efficiency 77 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K

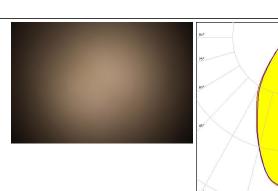


CITIZEN

LED CLC020 Series (Dim-To-Warm)

FWHM / FWTM 50.0° / 85.0°
Efficiency 70 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:


C16142_HEKLA-SOCKET-K C13723_MIRELLA-RZL Bender Wirth: 487 Typ L8

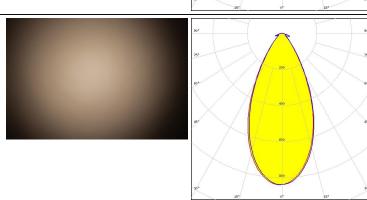

CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM / FWTM 59.0° / 83.0°
Efficiency 82 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

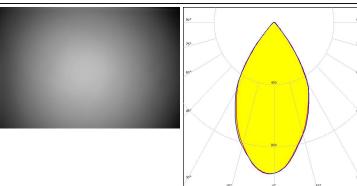


CITIZEN


LED CLU700/701/702/703

FWHM / FWTM 44.0° / 79.0°
Efficiency 85 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:


F15255_HEKLA-SOCKET-C C13723_MIRELLA-RZL

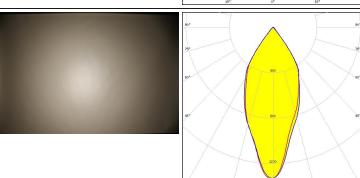




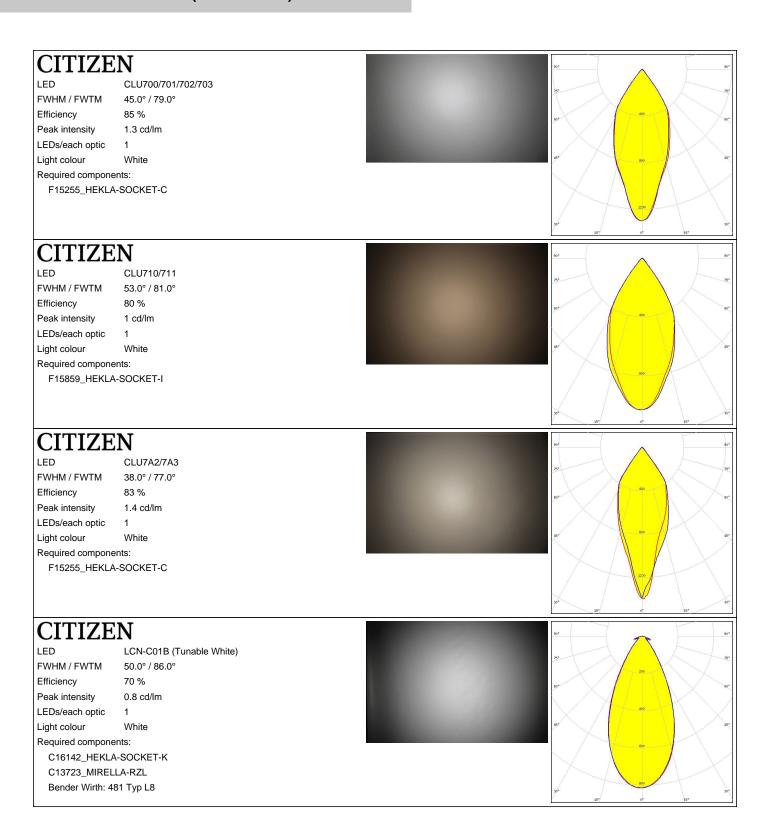




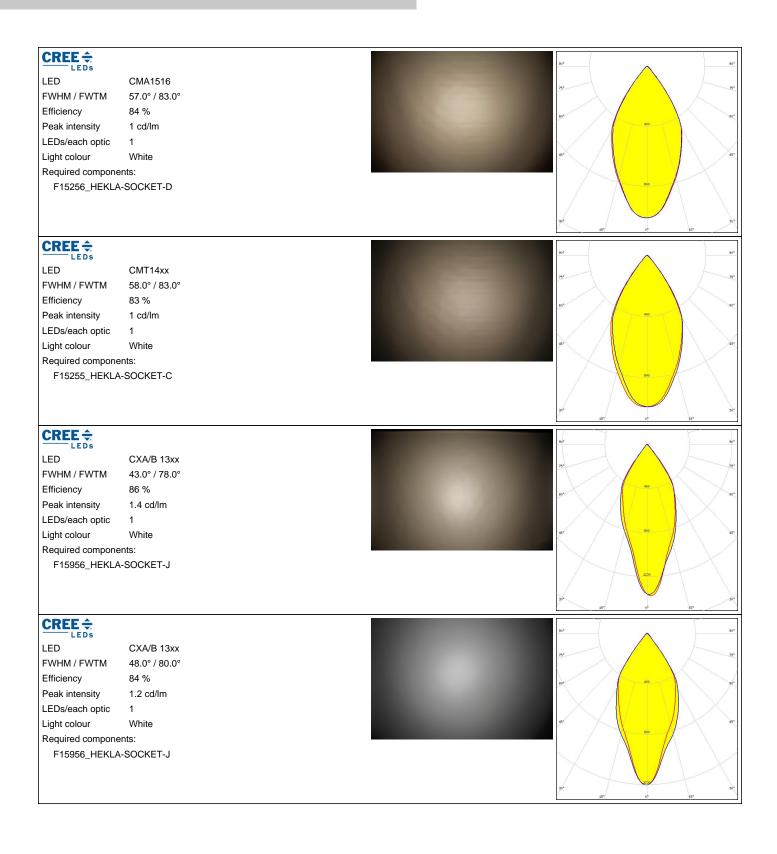




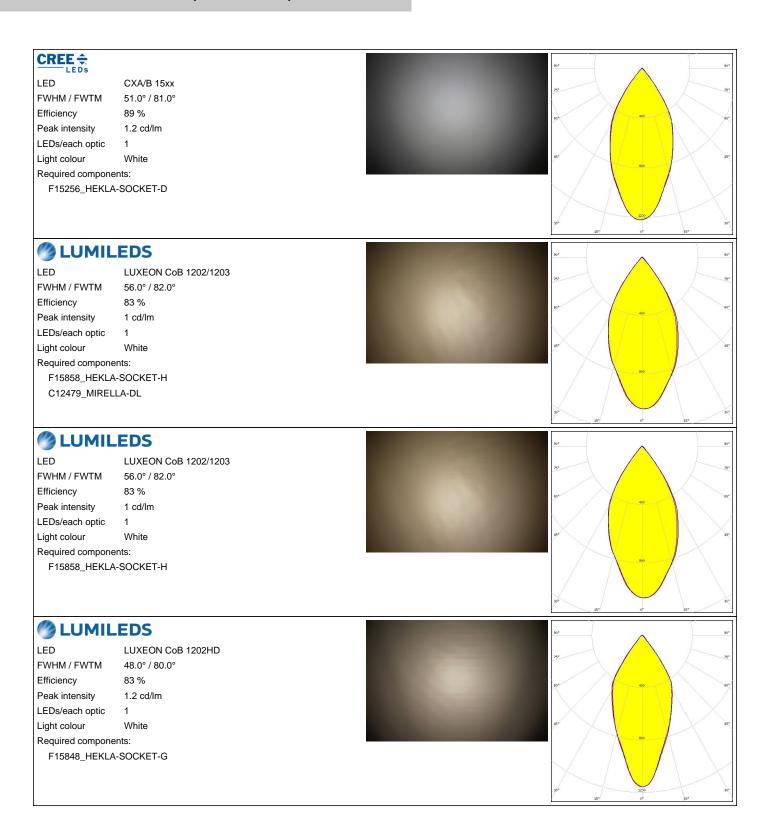




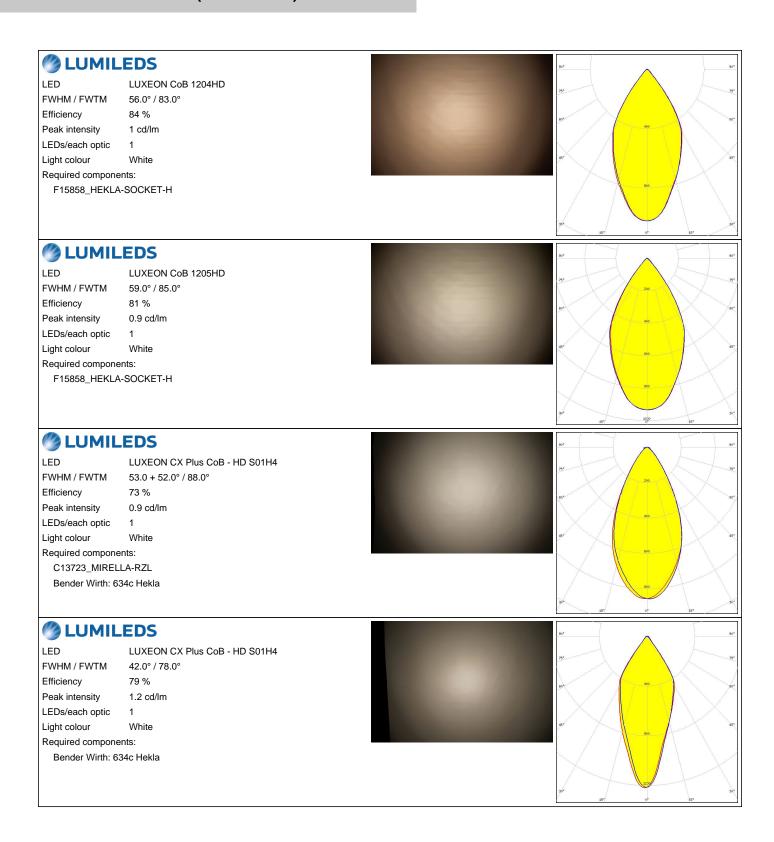




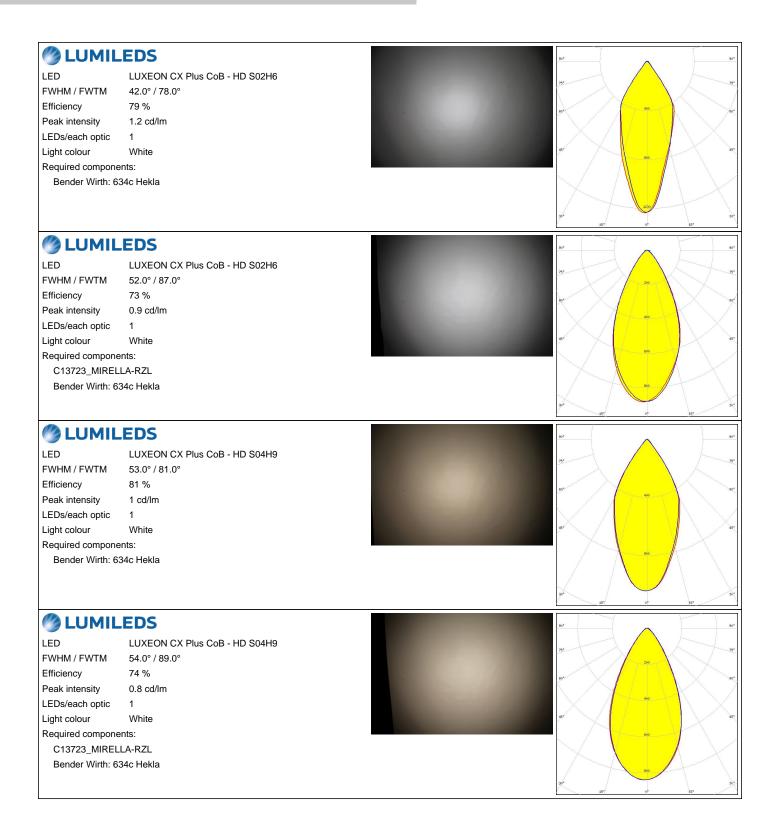




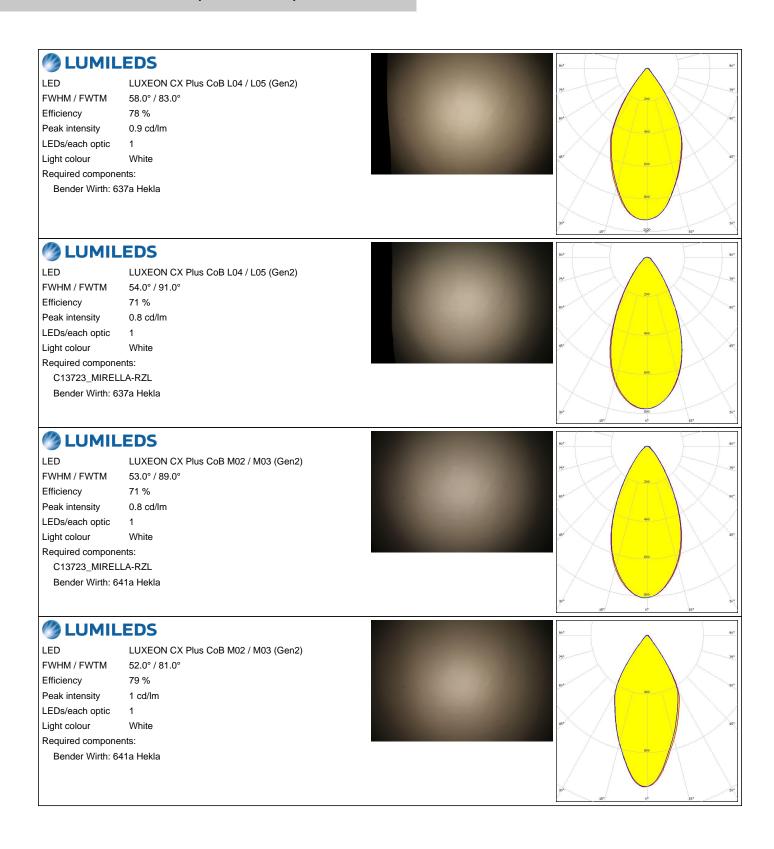




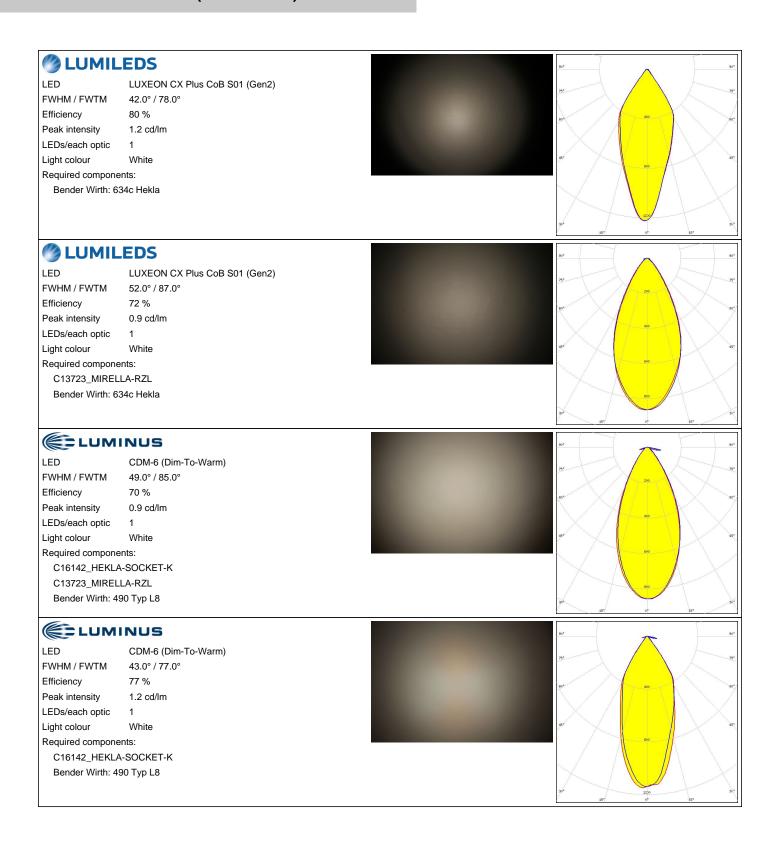




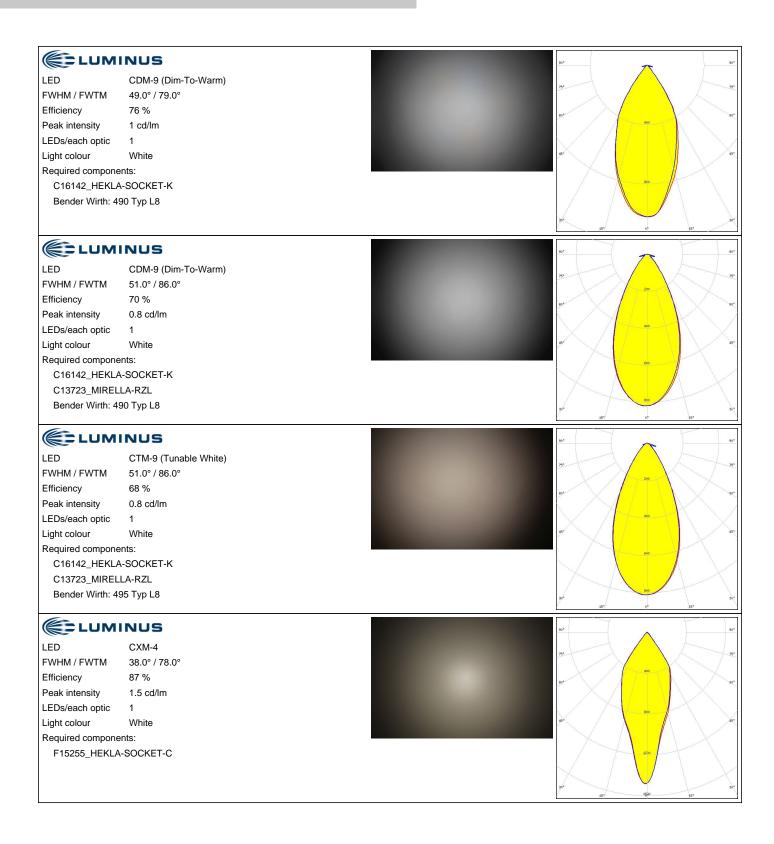



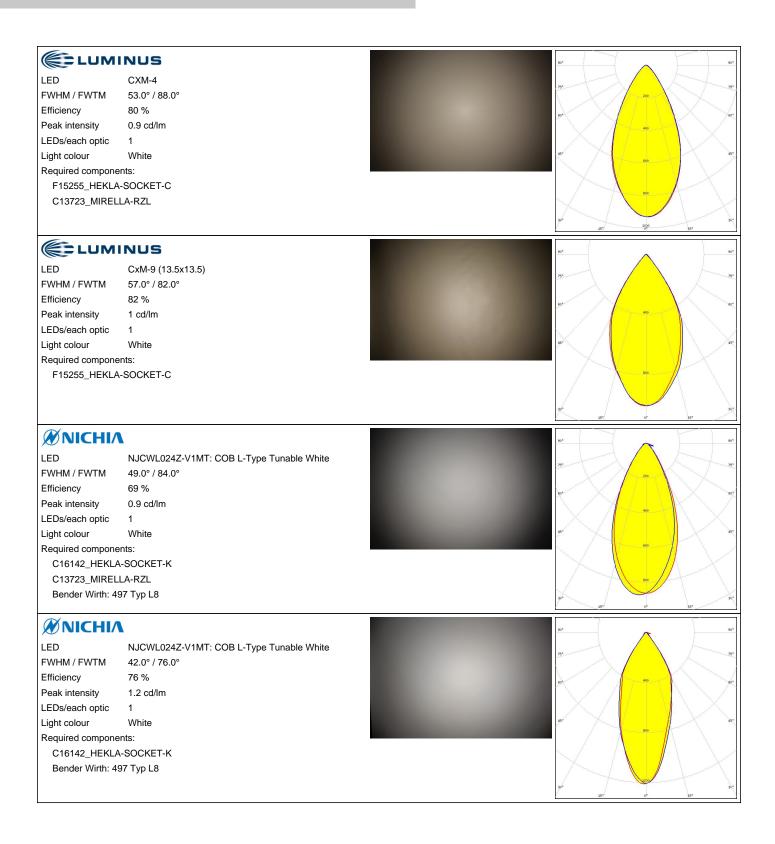




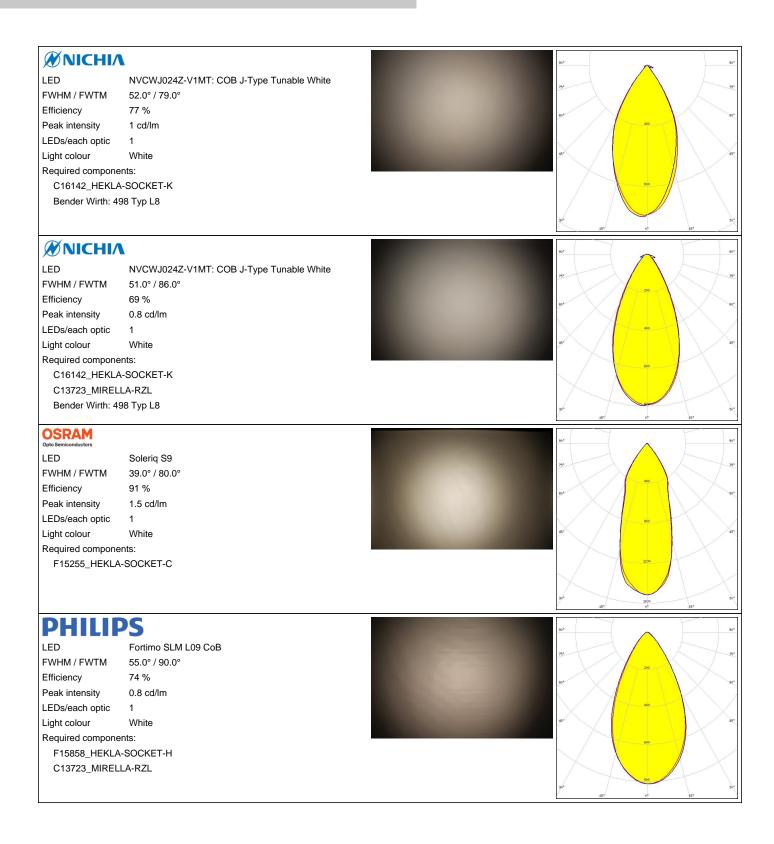

Fortimo SLM L09 CoB

FWHM / FWTM 57.0° / 83.0° Efficiency 82 % Peak intensity 1 cd/lm LEDs/each optic Light colour White Required components:

F15858_HEKLA-SOCKET-H

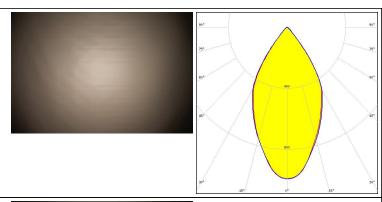

Fortimo SLM L13 CoB LED

FWHM / FWTM 54.0° / 90.0° Efficiency 71 % Peak intensity 0.7 cd/lm LEDs/each optic 1

White Light colour Required components:

C16142_HEKLA-SOCKET-K C13723_MIRELLA-RZL Bender Wirth: 432 Typ L8




LED Fortimo SLM L13 CoB

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 58.0° / 84.0° Efficiency 77 %

Peak intensity 0.8 cd/lm LEDs/each optic Light colour White Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8

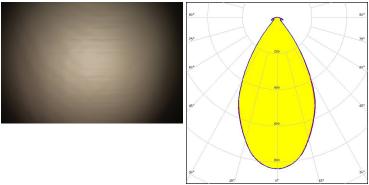


Required components:

Fortimo SLM L13 CoB

FWHM / FWTM 58.0° / 84.0° Efficiency 77 % Peak intensity 0.8 cd/lm LEDs/each optic White Light colour

C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8

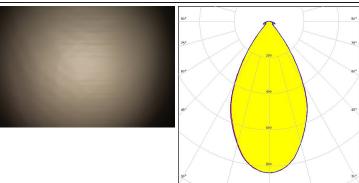




PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 54.0° / 90.0°
Efficiency 71 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K C13723_MIRELLA-RZL Bender Wirth: 432 Typ L8

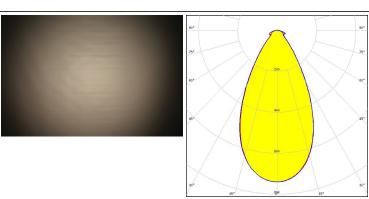

SAMSUNG

 LED
 LC010C G2


 FWHM / FWTM
 45.0° / 79.0°

 Efficiency
 82 %

 Peak intensity
 1.2 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C

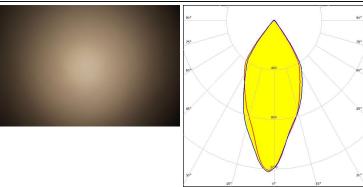

SAMSUNG


LED LC010T (Tunable White)

FWHM / FWTM 52.0° / 76.0° Efficiency 78 % Peak intensity 1.1 cd/lm LEDs/each optic 1

Light colour Tunable White

Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 501 Typ L8

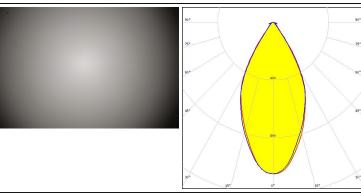


SAMSUNG

LED LC010T (Tunable White)

FWHM / FWTM 48.0° / 79.0° Efficiency 82 % Peak intensity 1.2 cd/lm LEDs/each optic 1

Light colour Tunable White

Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 501 Typ L8

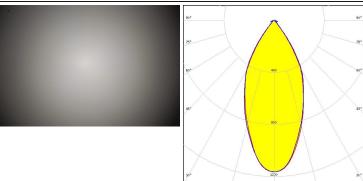




SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 62.0° / 86.0°
Efficiency 75 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

equired components:
F15859_HEKLA-SOCKET-I
C13333_MIRELLA-CL

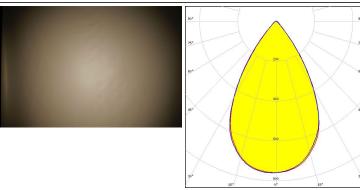


SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 57.0° / 94.0°
Efficiency 71 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15859_HEKLA-SOCKET-I C13723_MIRELLA-RZL

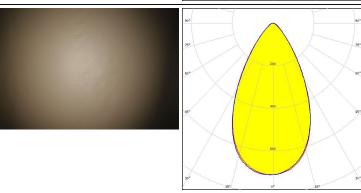


SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 62.0° / 88.0°
Efficiency 79 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15859_HEKLA-SOCKET-I

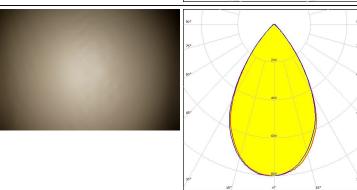


SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 60.0° / 90.0°
Efficiency 73 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:


F15859_HEKLA-SOCKET-I C12479_MIRELLA-DL

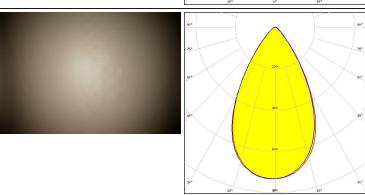




SAMSUNG FWHM / FWTM 56.0° / 82.0° Efficiency 83 % Peak intensity 1 cd/lm LEDs/each optic Light colour White Required components: F15848_HEKLA-SOCKET-G **SAMSUNG** LED LC020C G2 FWHM / FWTM 55.0° / 81.0° Efficiency 81 % Peak intensity 1 cd/lm LEDs/each optic 1 White Light colour Required components: F15859_HEKLA-SOCKET-I TRIDONIC SLE G7 LES09 FWHM / FWTM 56.0° / 82.0° Efficiency 84 % Peak intensity 1.1 cd/lm LEDs/each optic Light colour White Required components: F15255_HEKLA-SOCKET-C **TRIDONIC** SLE G7 LES09 FWHM / FWTM 54.0° / 89.0° Efficiency 76 % Peak intensity 0.9 cd/lm LEDs/each optic White Light colour Required components: F15255_HEKLA-SOCKET-C C13723_MIRELLA-RZL



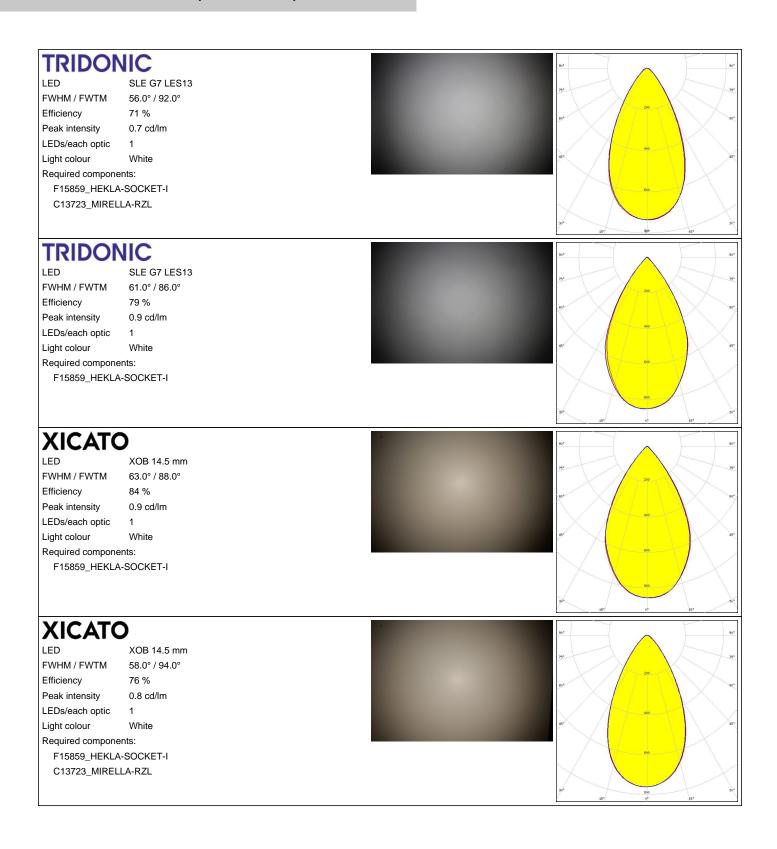



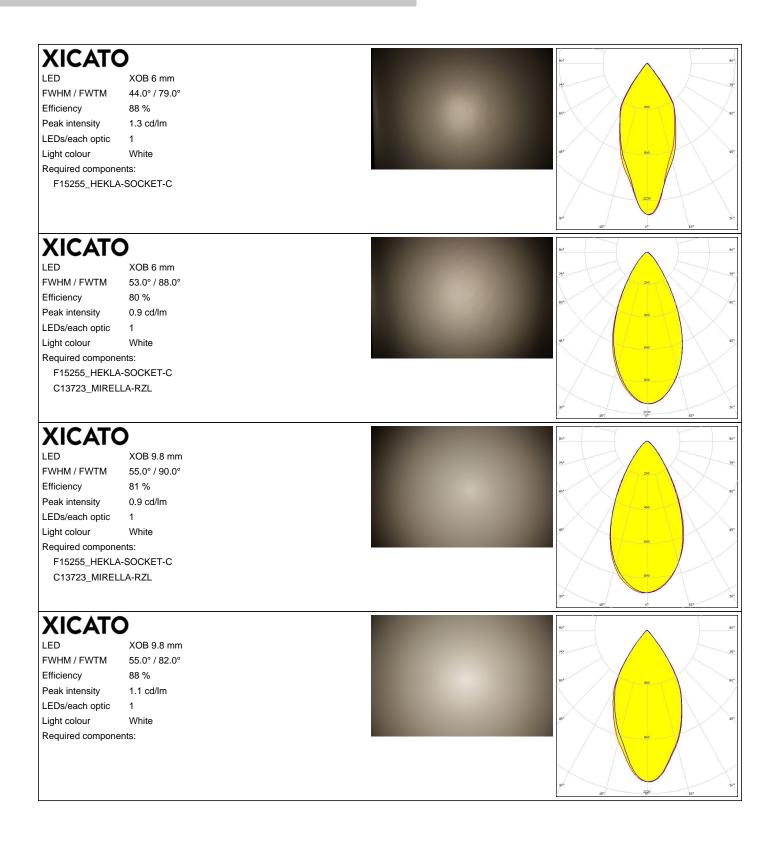



OPTICAL RESULTS (SIMULATED):



LED VERO13

FWHM / FWTM 53.0° / 78.0° Efficiency 83 %


Peak intensity 1.1 cd/lm

LEDs/each optic 1

Light colour White

Required components:

C16142_HEKLA-SOCKET-K



WNICHIA


LED COB L-Type (LES 11)

FWHM / FWTM 61.0° / 82.0°

Efficiency 88 %
Peak intensity 1 cd/lm
LEDs/each optic 1

Light colour White

Required components: F15858_HEKLA-SOCKET-H



SEOUL SEMICONDUCTOR

LED MJT COB LES 6

FWHM / FWTM 58.0° / 78.0°


Efficiency 89 %

Peak intensity 1.1 cd/lm LEDs/each optic 1

Light colour White

Required components:

F15255_HEKLA-SOCKET-C




SEOUL SEMICONDUCTOR

LED MJT COB LES 9.8

FWHM / FWTM 60.0° / 80.0° Efficiency 87 %

Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White

Required components: F15255_HEKLA-SOCKET-C





PRODUCT DATASHEET F16002 MIRELLA-G2-WW

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

25/25

www.ledil.com/ where_to_buy