

Data sheet

16115.2 WE-FANCOIL



Webeasy I/O Fancoil control module, 4 digital inputs, 3 relay outputs, If the bus connection fails, the outputs switch to preset, Mounting type: Mounting rail TS 35, Supply voltage range: 20 V - 28 VAC/DC

Business data

| | |
|--|-------------------|
| Article number | 16115.2 |
| Article name | WE-FANCOIL |
| GTIN (EAN) | 4044211207588 |
| Packaging unit | 1 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 168 g |
| Weight per piece (including packaging) | 208 g |
| Unit of weight | G |
| Customs number | 85423190 |
| Country of origin | NL |
| Product description | Controller module |

Data sheet

16115.2 WE-FANCOIL

Technical data

BUS data

| | |
|---|---|
| Bus-Topologie / Kabellänge max. | multidrop line / 500m |
| Datenübertragungsrate / Bus-Teilnehmer max. | 19k2 bps / 64 |
| Bus protocol / interface | Modbus RTU / RS485, halb duplex, nicht isoliert |

Dimensions

| | |
|--------|-------|
| Length | 95 mm |
| Width | 71 mm |
| Height | 60 mm |

Connection data

| | |
|--|---------------------|
| Connection principle | Screw connection |
| Wire cross-section single core (rigid), min. | 0.2 mm ² |
| Wire cross-section single-core (rigid), max. | 4 mm ² |
| Wire cross-section stranded, min. | 0.2 mm ² |
| Wire cross-section stranded, max. | 4 mm ² |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm ² |
| Wire cross-section stranded with wire-end ferrules, max. | 2.5 mm ² |
| Stripping length | 6 mm |
| Torque | 0.4 Nm |

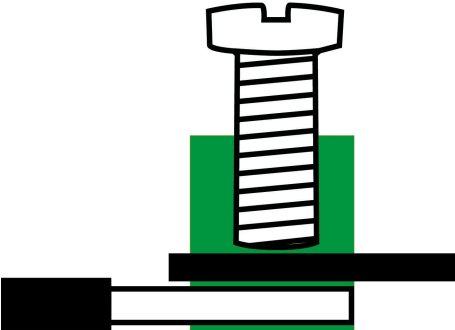
Environmental Product Compliance







| | |
|--------------------------------|------------|
| REACH Conform | yes |
| REACH Reference date | 2023-06-14 |
| REACH Candidate Substance Note | No |
| RoHS Conform | yes |

Data sheet

16115.2 WE-FANCOIL

Media



| | | | | | | | | | | |
|---|-----|------------------|-----|----|---|-------------------------------|---|--------------|----|----|
| di1 | di2 | di3 | di4 | 0V | 0V | L1 |  | N | | |
| | | | | | | 230V IN | | | | |
| | | | | | | WIELAND GST18/ SCREW (-ST) | | | | |
|  | A1 | WE-FANCOIL (-ST) | | | | | | INTERNAL BUS | A1 | -C |
|  | A2 | | | | | | | A2 | -C | |
|  | A | | | | | | | A | -C | |
|  | B | | | | | | | B | -C | |
| | | | | | | WIELAND GST18/ SCREW (-ST) | | | | |
| | | | | | | 230V OUTPUT | | | | |
| | | | 1 | 2 |  | N | 3 | | | |

Accessories
