PRODUCT DATASHEET C16505_STRADA-2X2-T3-M

STRADA-2X2-T3-M

IESNA Type III (medium) beam with excellent backlight control, illuminance uniformity and cutoff

SPECIFICATION:

Dimensions 50.0 x 50.0 mm 9.7 mm Height Fastening glue, pin, screw yes 🕕 ROHS compliant



MATERIALS:

Material Colour **Finish** Component **Type** STRADA-2X2-T3-M Multi-lens **PMMA** clear


ORDERING INFORMATION:

Component

C16505 STRADA-2X2-T3-M » Box size: 476 x 273 x 292 mm Qty in box MPQ MOQ Box weight (kg) 800 160 160 8.7




PRODUCT C16505_STRADA-2X2-T3-M

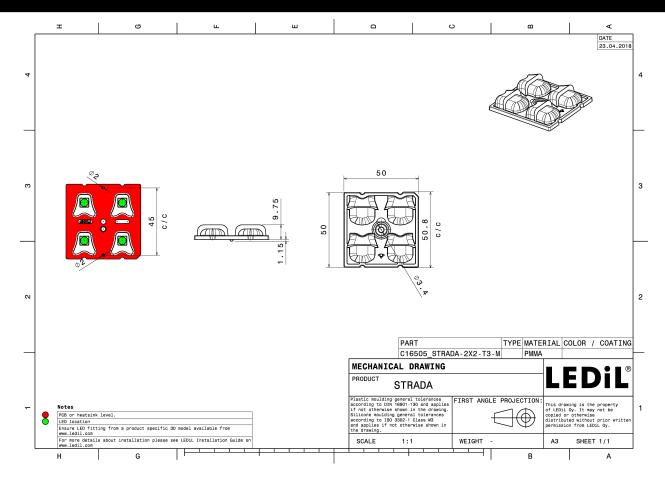


See also our general installation guide: www.ledil.com/installation_guide



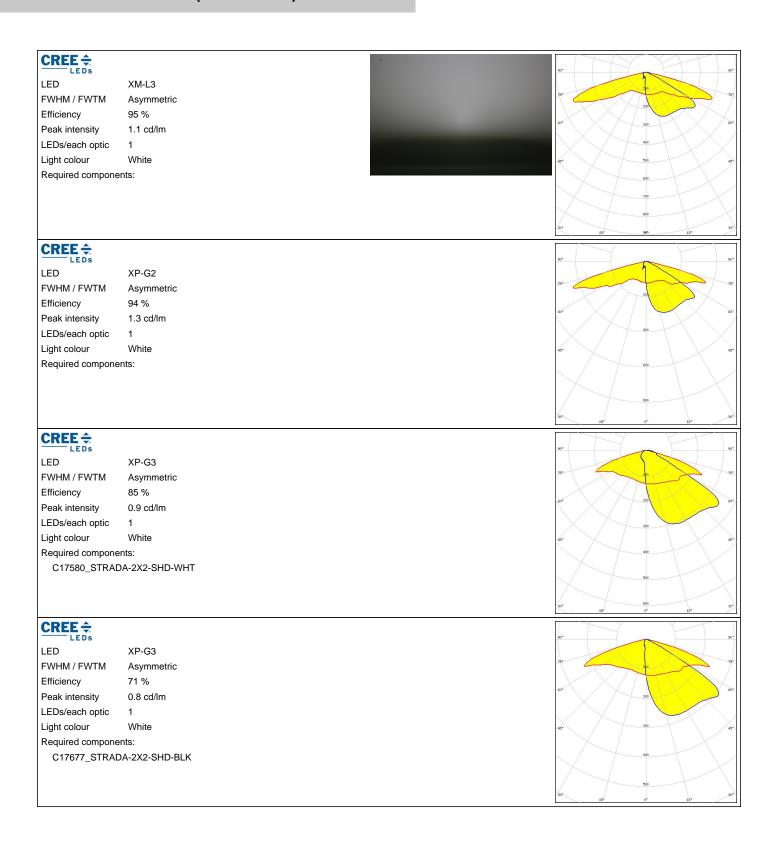



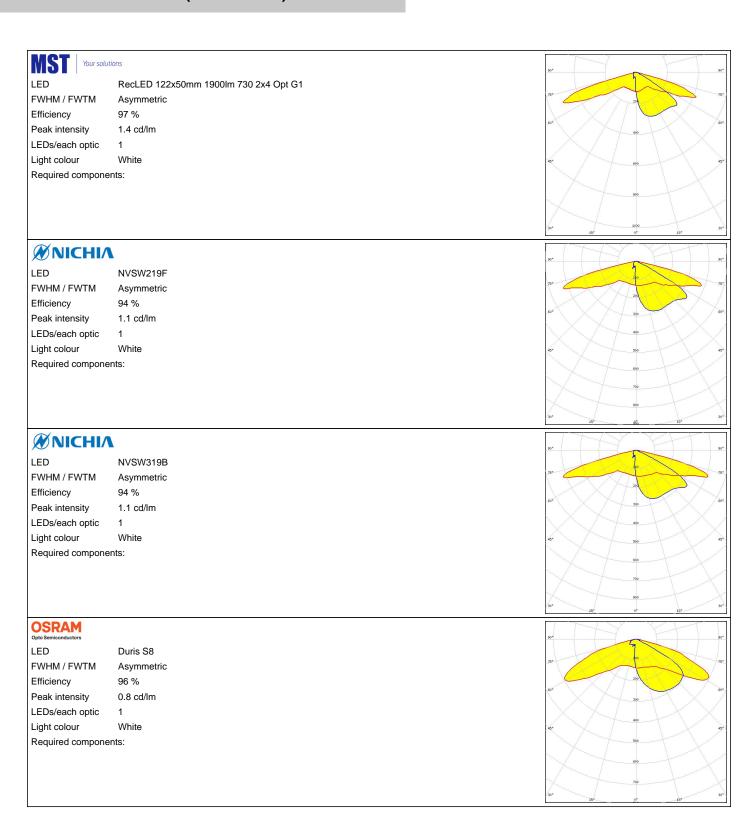




OSRAM

LED OSLON Square PC

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1


Light colour White Required components:



PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LED HILOM RC12 Z (LH181B)


FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LED HILOM RH12 Z (LH351C)

FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:




PRODUCT DATASHEET C16505_STRADA-2X2-T3-M

OPTICAL RESULTS (MEASURED):

SAMSUNG

LED HILOM RH16 (LH351C)

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LED HILOM RM12 Z (LH502C)

FWHM / FWTM Asymmetric


Efficiency 96 %

Peak intensity 0.8 cd/lm

LEDs/each optic 1

Light colour White

Required components:



SAMSUNG


LED HILOM RM16 Z (LH502C)

FWHM / FWTM Asymmetric
Efficiency 98 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:


SAMSUNG

LED HILOM RM8 Z (LH502C)

FWHM / FWTM Asymmetric
Efficiency 97 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:





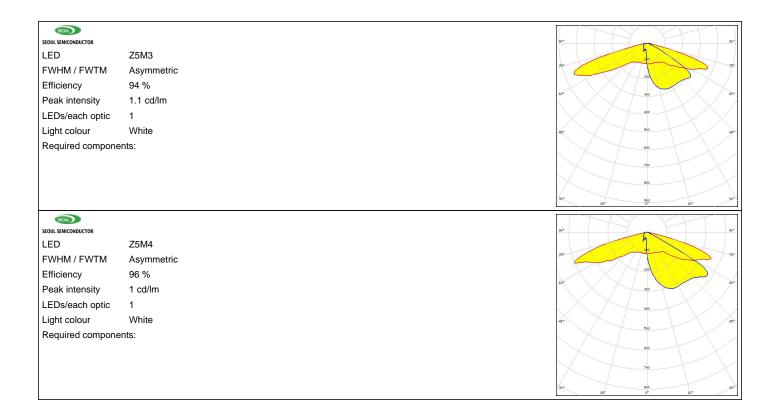

PRODUCT DATASHEET C16505_STRADA-2X2-T3-M


OPTICAL RESULTS (SIMULATED):

bridgelux

LED Bridgelux SMD 2835

FWHM / FWTM Asymmetric
Efficiency 78 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass



CREE \$

LED J Series 5050B 6V K Class

FWHM / FWTM Asymmetric

Efficiency 77 %


Peak intensity 0.6 cd/lm

LEDs/each optic 1

Light colour White

Required components:

Protective plate, glass




CREE \$

LED XHP35 HD FWHM / FWTM Asymmetric Efficiency 92 %

Peak intensity 0.7 cd/lm LEDs/each optic 1 Light colour White


Required components:



CREE -

LED XM-L2
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 1 cd/lm
LEDs/each optic 1

Light colour White Required components:





CREE &

LED

XP-G2

FWHM / FWTM

Asymmetric 80 %

Efficiency Peak intensity

0.9 cd/lm


LEDs/each optic

Light colour

White

Required components:

Protective plate, glass



CREE \$

LED

XP-G2 HE

FWHM / FWTM

Asymmetric

Efficiency

92 %


Peak intensity

1.2 cd/lm

LEDs/each optic Light colour

1 White

Required components:



CREE \$

LED

XP-G3

FWHM / FWTM

Asymmetric

Efficiency Peak intensity 74 %


0.7 cd/lm

LEDs/each optic Light colour

1 White

Required components:

Protective plate, glass



CREE ÷

XP-G3

FWHM / FWTM Efficiency

Asymmetric

Peak intensity

71 % 0.6 cd/lm


LEDs/each optic Light colour

White

Required components:

C17580_STRADA-2X2-SHD-WHT

Protective plate, glass








LED XP-L HD FWHM / FWTM Asymmetric

Efficiency 93 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1

Light colour White

Required components:




CREE &

LED XP-L2 FWHM / FWTM Asymmetric

Efficiency 92 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1

Light colour White Required components:



CREE \$

LED XT-E
FWHM / FWTM Asymmetric


Efficiency 64 %

Peak intensity 0.8 cd/lm

LEDs/each optic 1

LEDs/each optic 1
Light colour White

Required components: C17677_STRADA-2X2-SHD-BLK



CREE -


LED XT-E
FWHM / FWTM Asymmetric
Efficiency 57 %

Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White

Required components:

C17677_STRADA-2X2-SHD-BLK

Protective plate, glass



PRODUCT DATASHEET C16505_STRADA-2X2-T3-M

OPTICAL RESULTS (SIMULATED):

CREE &

LED

XT-E

FWHM / FWTM

Asymmetric 92 %

Efficiency Peak intensity


1.3 cd/lm

LEDs/each optic

White

Light colour

Required components:



CREE &

LED

XT-E

1

FWHM / FWTM

Asymmetric

Efficiency

76 %


Peak intensity LEDs/each optic 0.9 cd/lm

Light colour

White

Required components:

Protective plate, glass



LUMILEDS

LED

LUXEON 5050 HE

FWHM / FWTM

Asymmetric

Efficiency

78 %

Peak intensity

0.6 cd/lm

LEDs/each optic


1

Light colour

White

Required components:

Protective plate, glass



LUMILEDS

LED

LUXEON 5050 Round LES

FWHM / FWTM

Asymmetric

Efficiency Peak intensity 69 %


0.6 cd/lm

LEDs/each optic

Light colour

White Required components:

C17677_STRADA-2X2-SHD-BLK



PRODUCT DATASHEET C16505_STRADA-2X2-T3-M


OPTICAL RESULTS (SIMULATED):



LED LUXEON 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 83 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass




MUMILEDS

LED LUXEON 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White

Required components:




LUMILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White

Required components:




LUMILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 71 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17580_STRADA-2X2-SHD-WHT

Protective plate, glass



PRODUCT DATASHEET C16505_STRADA-2X2-T3-M


OPTICAL RESULTS (SIMULATED):



LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass




MUMILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 63 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components: C17677_STRADA-2X2-SHD-BLK

Protective plate, glass




MILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 76 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

C17580_STRADA-2X2-SHD-WHT




LUMILEDS

Required components:

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 73 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17677_STRADA-2X2-SHD-BLK








LED LUXEON HL2X
FWHM / FWTM Asymmetric
Efficiency 76 %
Peak intensity 0.7 cd/lm

LEDs/each optic 1 Light colour White

Required components:


Protective plate, glass



LUMILEDS

LED LUXEON TX
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White


Required components:



MILEDS

LED LUXEON V
FWHM / FWTM Asymmetric
Efficiency 91 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White

Required components:




LUMILEDS

LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)

FWHM / FWTM Asymmetric
Efficiency 77 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass








LED LUXEON XR-HL2X (L2H2-xxxxxxMLU010)

FWHM / FWTM Asymmetric
Efficiency 95 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:




WNICHIA

LED NF2x757G
FWHM / FWTM Asymmetric
Efficiency 78 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White

Protective plate, glass


Required components:



WNICHIA

LED NV4WB35AM
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White


Required components:



WNICHIA

LED NVSW219F
FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass





FWHM / FWTM

Peak intensity

Light colour

LEDs/each optic

Required components:

Protective plate, glass


Efficiency

Asymmetric

78 %

White

0.6 cd/lm

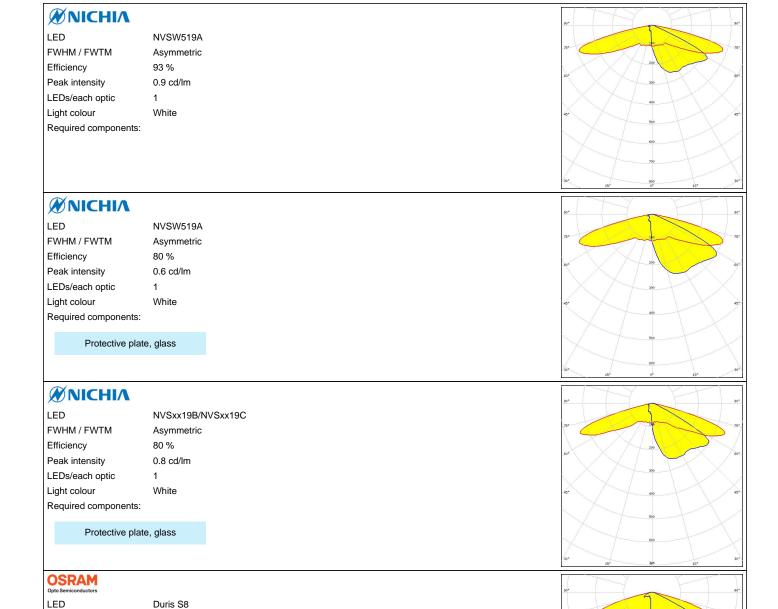


PRODUCT DATASHEET C16505_STRADA-2X2-T3-M

OPTICAL RESULTS (SIMULATED):



LED OSCONIQ C 2424 FWHM / FWTM Asymmetric Efficiency 92 % Peak intensity 0.7 cd/lm LEDs/each optic Light colour White

Required components:




OSRAM

LED OSCONIQ P 3737 (2W version)

FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 1.2 cd/lm LEDs/each optic 1 White Light colour

Required components:




OSRAM Opto Semiconductors

LED OSCONIQ P 3737 (3W version)

FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 1 cd/lm LEDs/each optic 1 Light colour White

Required components:




OSRAM

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric 60 % Efficiency Peak intensity 0.5 cd/lm LEDs/each optic 1 White Light colour Required components:

C17677_STRADA-2X2-SHD-BLK

Protective plate, glass



PRODUCT DATASHEET C16505_STRADA-2X2-T3-M


OPTICAL RESULTS (SIMULATED):

OSRAM

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric Efficiency 80 % Peak intensity 0.8 cd/lm LEDs/each optic Light colour White Required components:

Protective plate, glass




OSRAM

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric Efficiency 76 % Peak intensity 0.7 cd/lm LEDs/each optic 1 White Light colour Required components:

C17580_STRADA-2X2-SHD-WHT




OSRAM Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric Efficiency 70 % Peak intensity 0.7 cd/lm LEDs/each optic Light colour White Required components:


C17677_STRADA-2X2-SHD-BLK



OSRAM

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 1.2 cd/lm LEDs/each optic White Light colour Required components:




OSRAM

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 66 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17580_STRADA-2X2-SHD-WHT

Protective plate, glass



PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4

FWHM / FWTM Asymmetric

Efficiency 80 %


Peak intensity 1.2 cd/lm

LEDs/each optic 1

Light colour White

Required components:

Protective plate, glass




PHILIPS

LED Fortimo FastFlex LED 2x8 DAX G4

FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass




SAMSUNG

LED HILOM RH12 Z (LH351C)

FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass






SAMSUNG

LED HILOM RM8 Z (LH502C)

FWHM / FWTM Asymmetric
Efficiency 81 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:

Protective plate, glass




SAMSUNG

LED LH351B
FWHM / FWTM Asymmetric
Efficiency 77 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1

Light colour White Required components:

Protective plate, glass




SAMSUNG

LED LH351D
FWHM / FWTM Asymmetric
Efficiency 75 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:


Protective plate, glass




SAMSUNG

LED LH502D
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White


Required components:





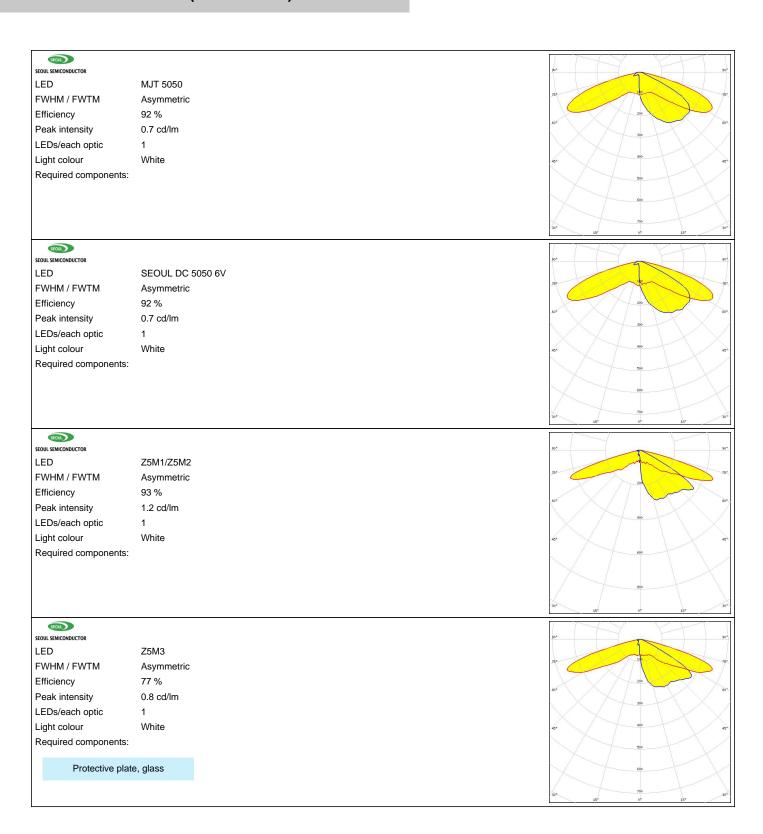



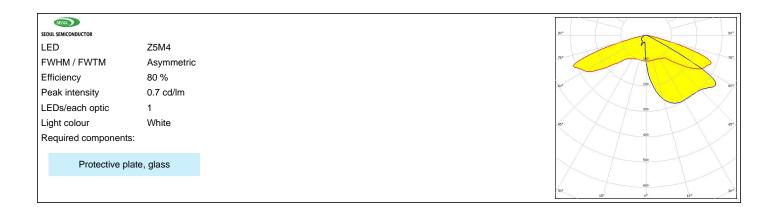

PRODUCT DATASHEET C16505_STRADA-2X2-T3-M

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

23/23

www.ledil.com/ where_to_buy