


NOTES:

- 1) LABEL REQUIREMENT:
LABELS ARE M23053/5, WHITE. ACCEPTABLE SUBSTITUTION IS DAT-38-292 OR TRANSVINYL (DAT-63-292-2.5).
- 2) ASSEMBLY REQUIREMENT:
 - ASSEMBLY CAN BE BUILT AS SUB-ASSEMBLY PN 17053110D3-SUB USING ITEM 1, 2 & 3.
 - DEPICTION OF ITEM 1 & 2 IS FOR REFERENCE ONLY.
- 3) TEST REQUIREMENT:
 - a. IL ≤ 1.0 dB @ 850 nm.
 - b. ENDFACE VISUAL REQUIREMENT: PHYSICAL CONTACT PC: IEC-61300-3-35
 - c. ENDFACE GEOMETRY: EN-50377-15-1

REVISION HISTORY – ALL SHEETS ARE AT THE SAME REVISION			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2018/10/09	

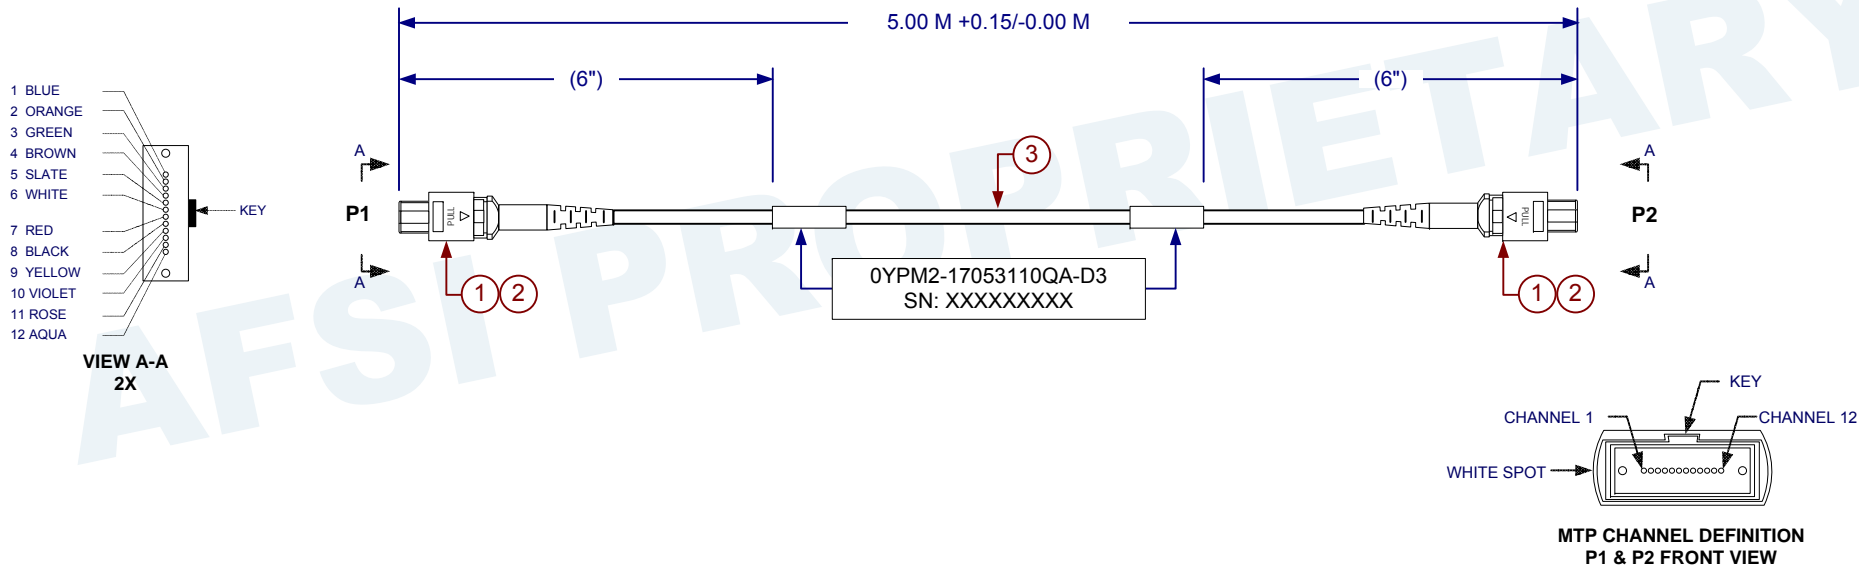

P1	PINOUT DIAGRAM	P2
1	● BLUE ●	12
2	● ORANGE ●	11
3	● GREEN ●	10
4	● BROWN ●	9
5	● SLATE ●	8
6	○ WHITE ○	7
7	● RED ●	6
8	● BLACK ●	5
9	● YELLOW ●	4
10	● VIOLET ●	3
11	● ROSE ●	2
12	● AQUA ●	1

4	AFSI-PRE T BOX	BOX, SMALL FIBER CABLE 10X10X2 W/AFSI GRAPHICS	1
3	NFO1253M3-12	12 CHANNEL LITE FLIGHT	17 FEET
2	16550	KIT MTP F-MM 4.0 AQUA	2
1	9734	KIT FERRULE 12F MM MT ELITE	2
ITEM NO.	PART NO.	DESCRIPTION	QTY/LENGTH

MATERIAL:		DfTR/Designer: C. Hoang 2017/10/23					
		Check By: B. Waite 2017/10/24					
		Manufacturing: B. Waite 2017/10/24					
		Market Manager/PLM: Q. Abraham 2017/10/25					
		Configuration Management: L. Brown 2018/10/09	TITLE: 12 CHANNEL MTP TO MTP ASSEMBLY, MM				
NEXT ASSY	USED ON	DRILLED HOLE DIAMETER TOLERANCE Ø.000 TO Ø.125 $\begin{matrix} .004 \\ .001 \end{matrix}$ Ø.251 TO Ø.500 $\begin{matrix} .006 \\ .001 \end{matrix}$ Ø.126 TO Ø.250 $\begin{matrix} .005 \\ .001 \end{matrix}$ Ø.501 TO Ø.750 $\begin{matrix} .008 \\ .001 \end{matrix}$		SIZE A	CAGE CODE 0YPM2	DWG NO 17053110QA-D3	REV -
APPLICATION		DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL ON ANGLES ±3° 1 PL ±.1 2 PL ±.02 3 PL ±.010 INTERPRET DIM AND TOL PER ASME 14.9M-1994		SCALE: NONE	SHEET 1 OF 1		