


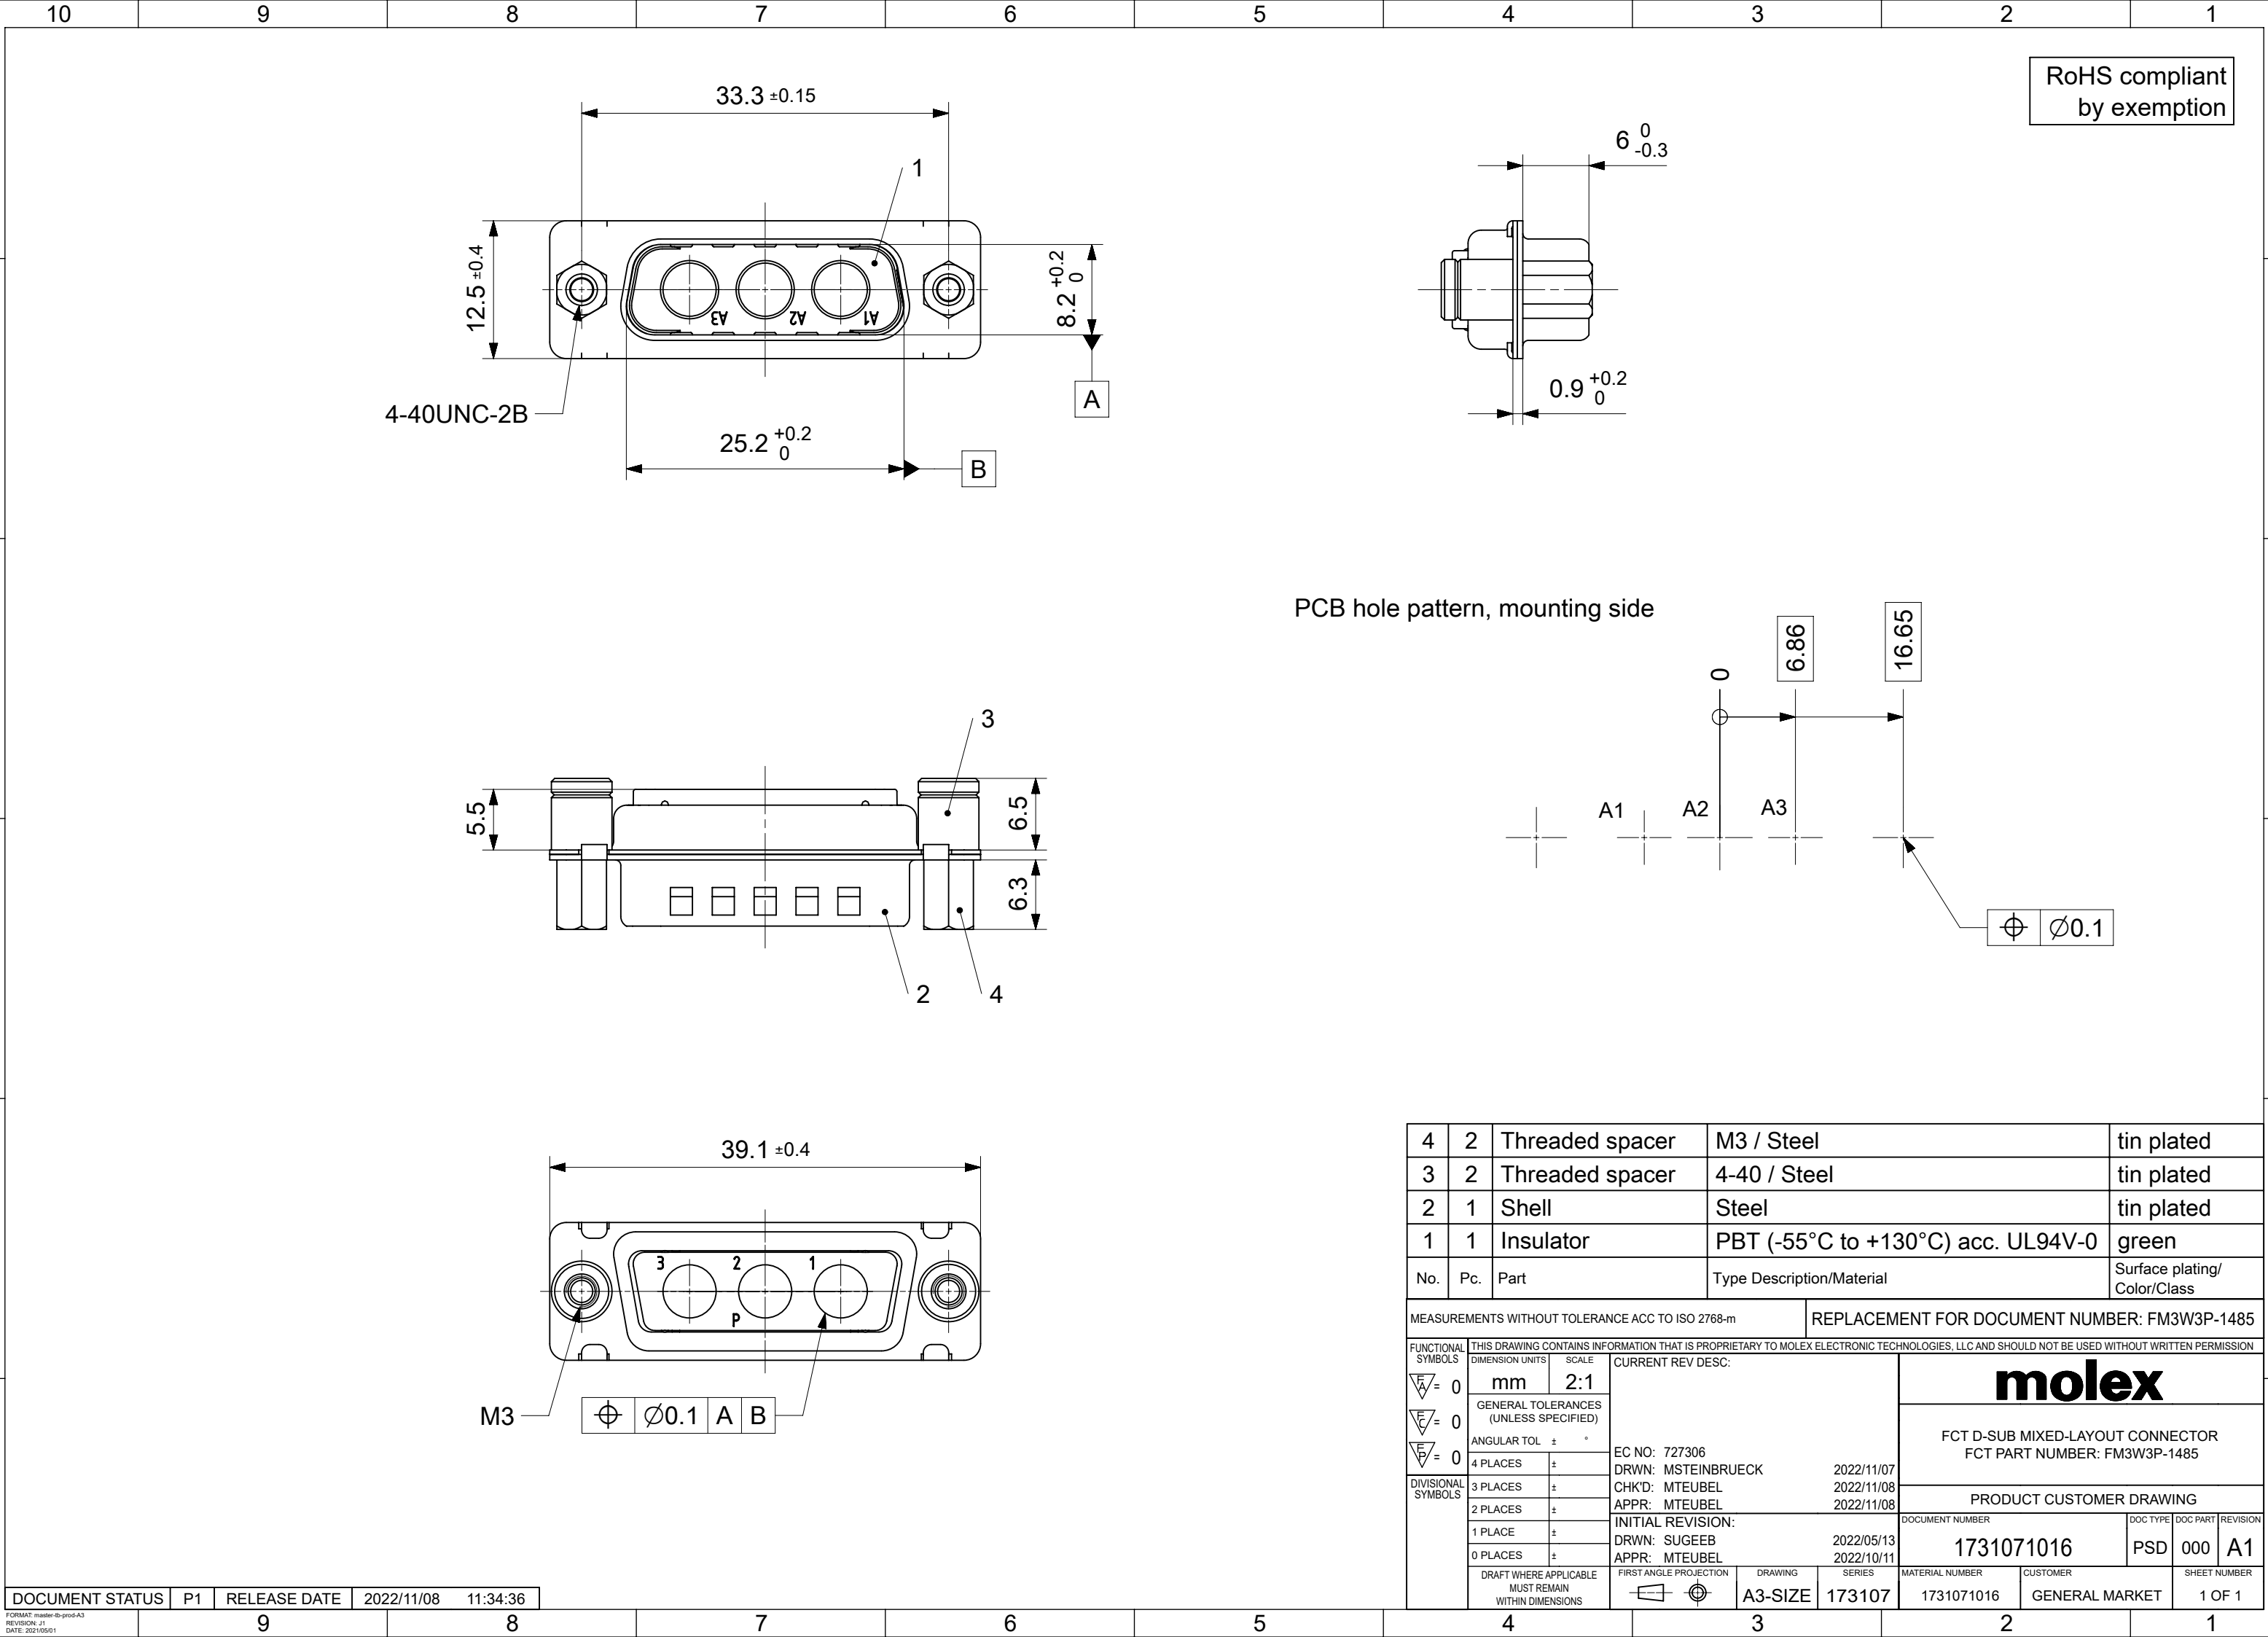

RoHS compliant
by exemption

PCB hole pattern, mounting side

4	2	Threaded spacer	M3 / Steel	tin plated			
3	2	Threaded spacer	4-40 / Steel	tin plated			
2	1	Shell	Steel	tin plated			
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green			
No.	Pc.	Part	Type Description/Material	Surface plating/ Color/Class			
MEASUREMENTS WITHOUT TOLERANCE ACC TO ISO 2768-m			REPLACEMENT FOR DOCUMENT NUMBER: FM3W3P-1485				
FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
	DIMENSION UNITS	SCALE	CURRENT REV DESC:				
	 = 0	mm			2:1		
	GENERAL TOLERANCES (UNLESS SPECIFIED)						
	ANGULAR TOL	± °					
	4 PLACES	±					
	DIVISIONAL SYMBOLS	3 PLACES ±		EC NO: 727306 DRWN: MSTEINBRUECK 2022/11/07 CHK'D: MTEUBEL 2022/11/08 APPR: MTEUBEL 2022/11/08			
		2 PLACES ±		FCT D-SUB MIXED-LAYOUT CONNECTOR FCT PART NUMBER: FM3W3P-1485			
		1 PLACE ±					
		0 PLACES ±					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		PRODUCT CUSTOMER DRAWING					
FIRST ANGLE PROJECTION		DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION		
DRAWING		1731071016		PSD	000	A1	
SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
A3-SIZE		173107		1731071016		GENERAL MARKET	1 OF 1