
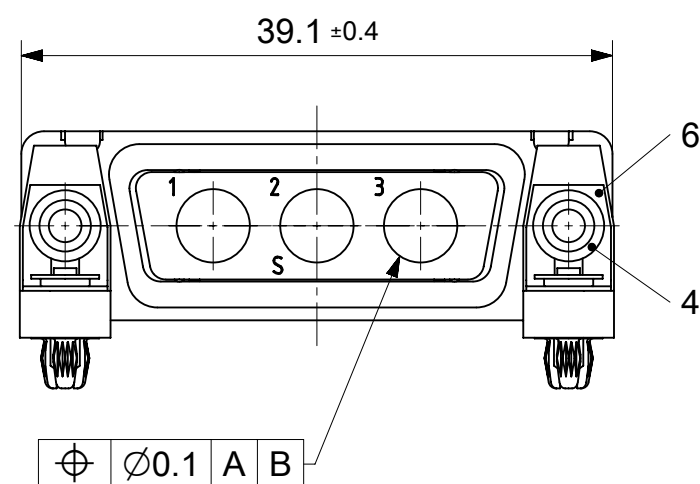
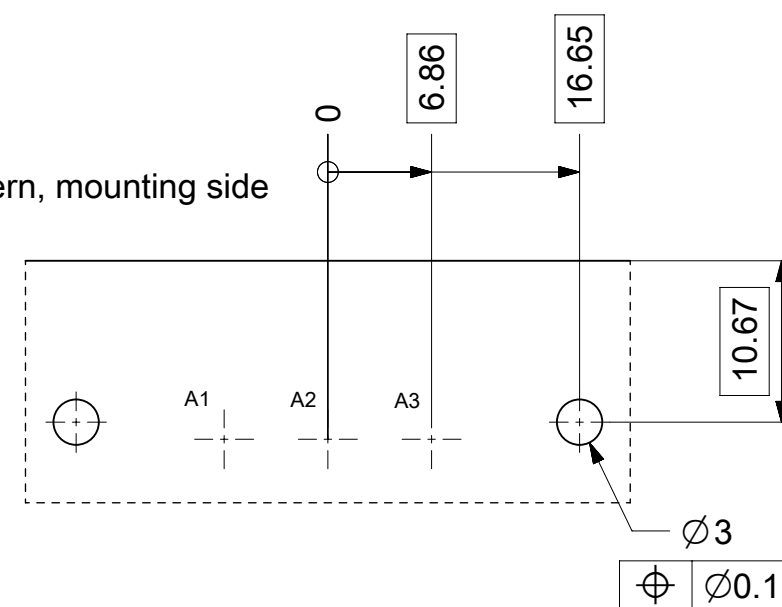
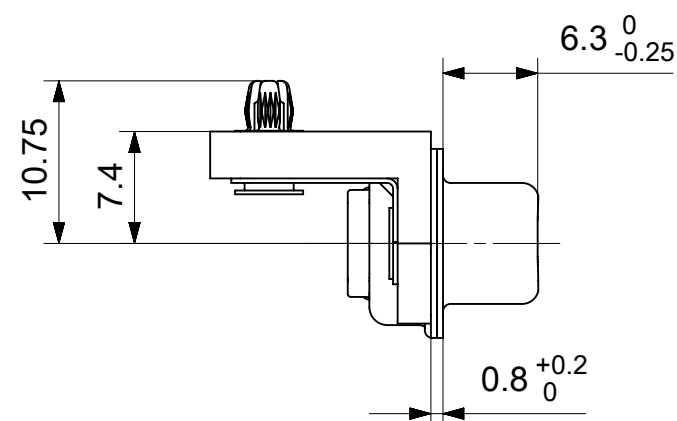




6	2	Grounding bracket	Brass	tin plated
5	2	Snap-in rivet	PCB 1.6mm / Brass	tin plated
4	2	Clinch nut	M3 / Brass	tin plated
3	2	Plastic bracket	FKA1/4 / PC	black
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
No.	Pc.	Part	Type Description/Material	Surface plating/ Color/Class

MEASUREMENTS WITHOUT TOLERANCE ACC TO ISO 2768-m

REPLACEMENT FOR DOCUMENT NUMBER: FM3W3S-1689

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
FA = 0 FE = 0 FE = 0 DIVISIONAL SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC:		molex FCT D-SUB MIXED-LAYOUT CONNECTOR FCT PART NUMBER: FM3W3S-1689							
		mm		2:1											
		GENERAL TOLERANCES (UNLESS SPECIFIED)													
		ANGULAR TOL ± °						EC NO: 727306		PRODUCT CUSTOMER DRAWING					
		4 PLACES		±				DRWN: MSTEINBRUECK 2022/11/07							
3 PLACES		±		CHK'D: MTEUBEL 2022/11/08		DOCUMENT NUMBER 1731071037				DOC TYPE PSD	DOC PART 000	REVISION A1			
2 PLACES		±		APPR: MTEUBEL 2022/11/08											
1 PLACE		±		INITIAL REVISION:									1731071037		
0 PLACES		±		DRWN: SKANDB 2022/05/26											
				APPR: MTEUBEL 2022/09/30											
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		FIRST ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A3-SIZE		173107		1731071037		GENERAL MARKET		1 OF 1	