



TD300

Project Name _____

Catalog No. _____ Date _____

With its aesthetically pleasing features, the TD300 combines style with functionality as it provides energy saving control of incandescent and fluorescent lighting, as well as certain motor loads such as fans, hot tub heaters and circulating pumps. The timer offers two presets for energy code compliance – two hour timing for Title 24 and IECC and 4 hour timing for ASHRAE 90.1. A timed override allows lights and HVAC (heating, ventilating and air conditioning) to remain on for a specified amount of time for after-hours cleaning crews. The TD300 is easy to install and can replace any wall switch.


Compliance and Certification



Product Features

- Zero Arc Point Switching
- No minimum load requirement
- Adjustable time delay and sensitivity
- Walk test indicator
- Dual 120/277 VAC operation
- UL and cUL listed
- Title 24 compliant
- Five-year limited warranty
- 120-277 Vac

Dimensional Data

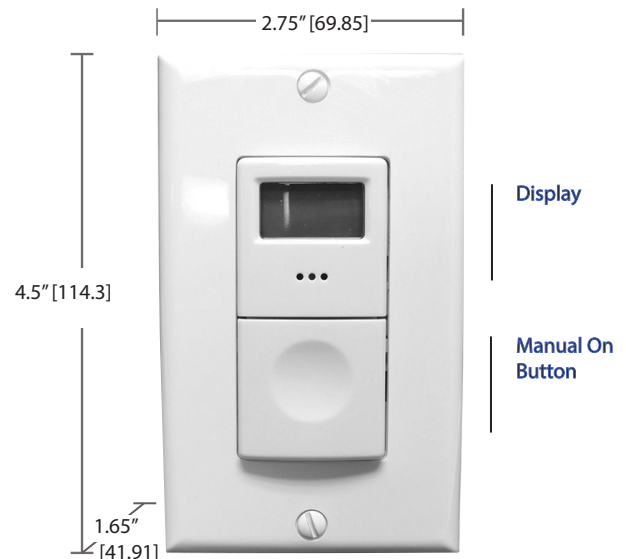

Ordering Information

TD300	W
MODEL	CONTROL
TD300	W White

General Specifications

Power requirements	120/230/277VAC; 50/60Hz
Electrical Ratings	120VAC <ul style="list-style-type: none"> - 15A Resistive - 10A Ballast - 1200W LED Lamp Driver - 8A Tungsten - 1/4HP Motor - 360VA Pilot Duty 277VAC <ul style="list-style-type: none"> - 15A Resistive - 15A Resistive - 10A Ballast
Load Requirements	None
Operating Environment	Indoor use only Operating environment: 32° - 122°F (0°-50°C) Relative humidity (non-condensing): 0%-95%
Construction	Casing – high impact injection-molded plastic Wall plate locks access to dipswitches for tamper resistance
Display	Backlit LED
Dimensions	4.5" H x 2.75" W x 1.65" D (114.3mm H x 69.85mm W x 41.91mm D)
Weight	2.9 oz (82.21 g)
Color	White
Mounting	Single-gang NEMA-style switch box (average switch box) Decorator wall plate included
Certifications	UL and cUL listed
Warranty	Five-year limited