
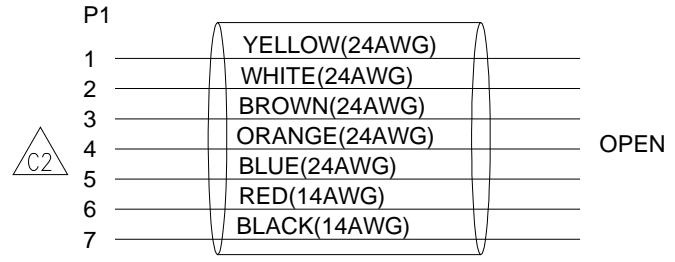
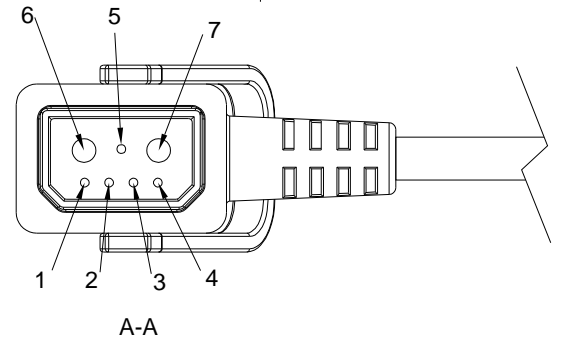


REV	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	HUANG	2021.11.26
C2	N/A	The wire color of pin 5 in the pin out should be changed from yellow to blu/ Changed the P1 Connector sureface	Kevin_Rdz	2022.08.15

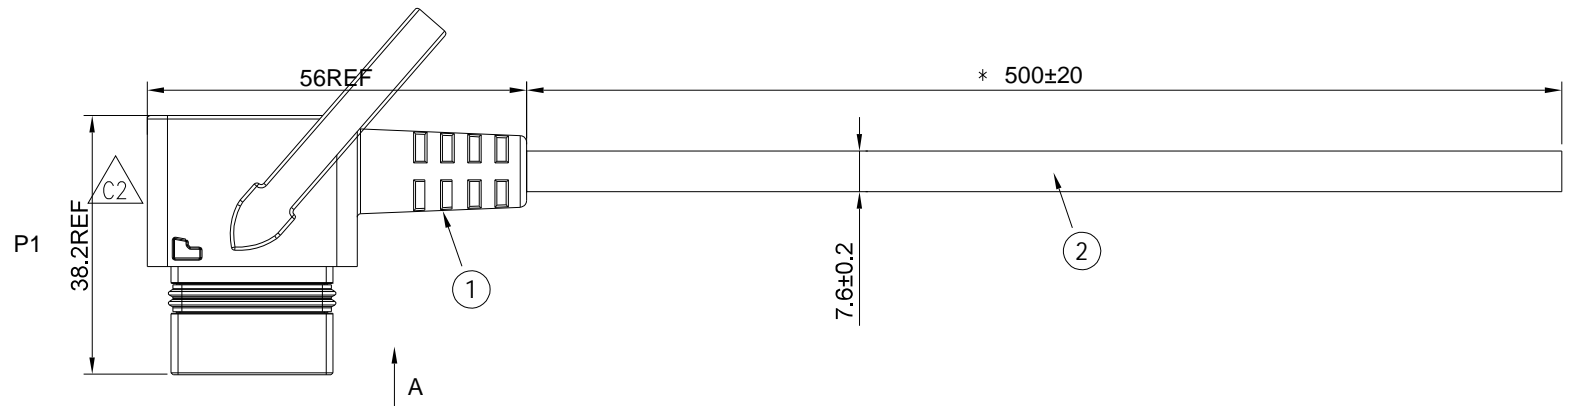

- SPECIFICATIONS&TEST REQUIREMENTS**
- 1.TEMPERATURE RATING:-20 °C~80 °C
  - 2.CURRENT RATING :20A(POWER),2A(SIGNAL)
  - 3.VOLTAGE RATING:72V DC
  - 4.INSULATION RESISTANCE:20MΩ@500VDC,1MIN
  - 5.DIELECTRIC WITHSTANDING VOLTAGE:500VAC, 1MIN
  - 6.MATING CYCLE:5000CYCLES.
  - 6.WATERPROOF RATING:IPX5(MATING).
  - 7.ROHS COMPLIANT.

2	900-00701-00051	A/R	M	UL2464 2C*14AWG+5C*24AWG BLACK PVC JACKET
1	13205151-02	1	PC	RC03 2+5Pin MALE CONNECTOR WITH MALE PIN
ITEM	CHOGORI P/N	QTY	UNIT	DESCRIPTION

UNIT: mm  
 TOLERANCE:  
 ±1

DESCRIPTION:  
 RC03 2+5Pin MALE CONNECTOR  
 WITH MALE PIN (OVERMOLDING TYPE)

SCALE: 1:1 SHEET 1 OF 1

REV. C2 SIZE A4 \* :Inspection Item



PART NO	11C03621112303	DRAWN BY	Kevin_Rdz	DATE	2022.08.15
DWG NO	11C03621112303	CHECKED BY	Kevin_Rdz	DATE	2022.08.15
CUSTOMER		APPROVED BY	Eric	DATE	2022.08.15

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.