

# MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY  
PRAIRIE, ILLINOIS

FED. MFR. CODE 91929

# SWITCH-BASIC

CATALOG LISTING  
**ISEI-12**

ISEI-12  
ISSUE 5

ISEI-12  
PAGE 1 OF 1

M

DRAWING NUMBER

ISSUE  
X  
10  
9

REVISIONS	
A	CO 16449 D A W 12 JAN 62
B	CO-34213 J A L 24 SEPT 74
C	CO 51463-G WJM 27 JUL 83
D	CO57041A C J H 21 MAR 85
E	CO94274 D L M MAR 99

REPLACES

RELEASE NO.

CHECK


CHECK

CHECK

DRAWN

FORMTEK

FO-50376

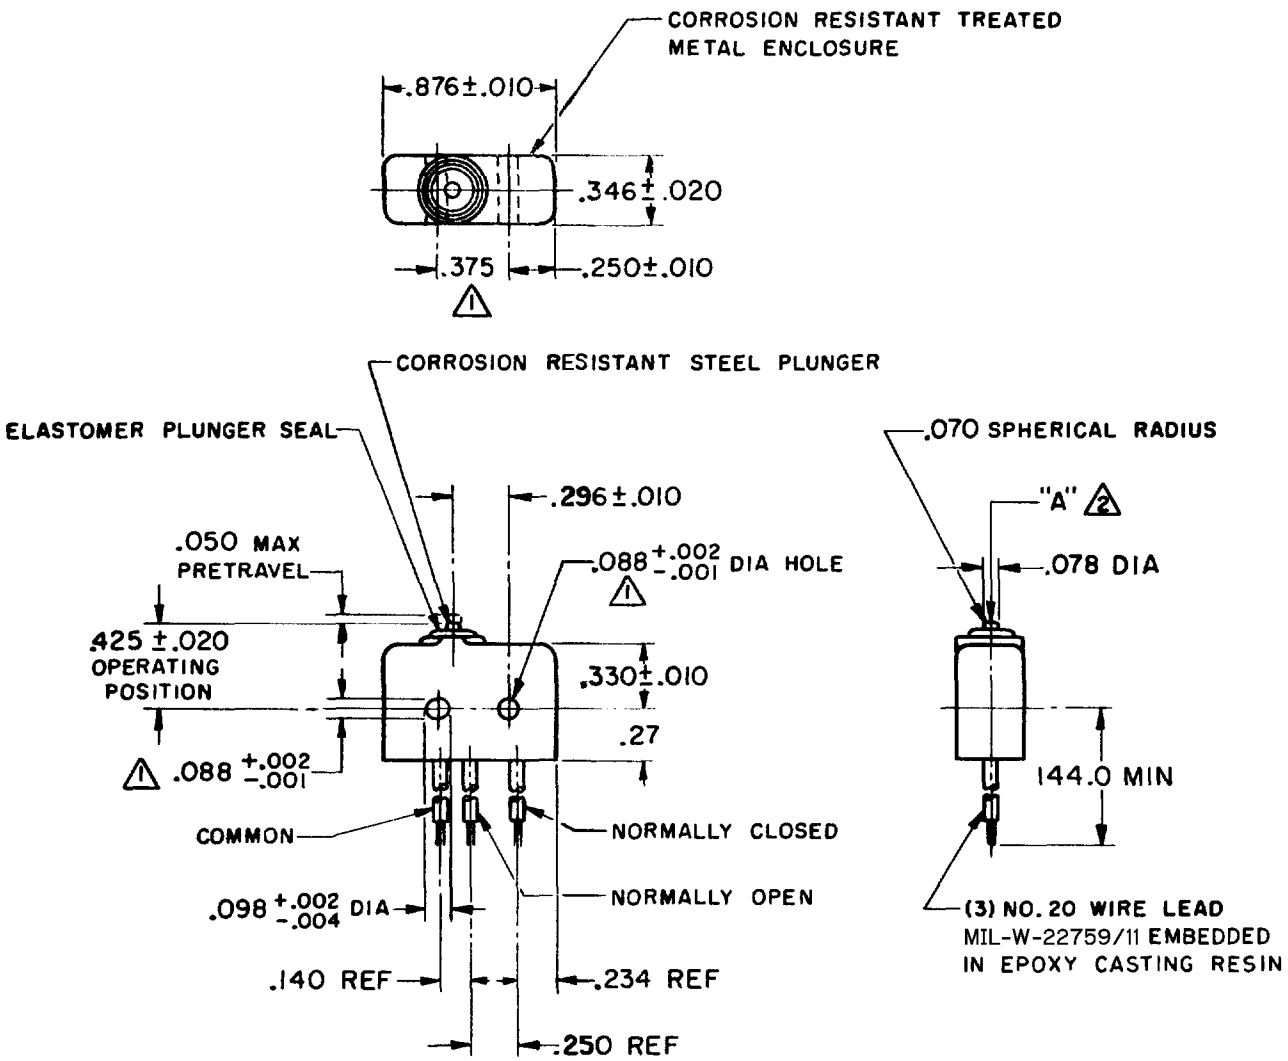

- NOTE -**
- ① - MOUNTING HOLES WILL ACCEPT  $.087$  MAX DIA PINS OR SCREWS ON  $.375 \pm .002$  CENTERS
  - ② - ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
  - ③ - WEIGHT OF SWITCH ONLY IS  $.26$  OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS  $4.65$  OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 5-17 OZ	CONTACT ARRANGEMENT P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 4 OZ MIN	250 VAC ----- 5 AMP	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES <b>TOLERANCES ARE:</b>
RELEASE TRAVEL ----- .004 MIN	30 VOLTS DC RATING	
DIFFERENTIAL TRAVEL ----- .004 MAX	INDUCTIVE ----- SEA LEVEL ----- 3 AMP	ONE PLACE (.0) $\pm .030$
OVERTRAVEL ----- .003 MIN	RESISTIVE ----- SEA LEVEL ----- 5 AMP	TWO PLACE (.00) $\pm .015$
	MAXIMUM INRUSH ----- 24 AMP	THREE PLACE (.000) $\pm .005$
		ANGLES $\pm$
		WEIGHT ③

D A W 12 JAN 62 CHECK D A W 27 FEB 62 CHECK