

Surface Mount Aluminum Electrolytic Capacitors



SNP Series
(Non Polarity, 85°C)

MERITEK

FEATURES

- Height : 5.4mm
- Load life : 85°C 2000 hours
- Non polarity series using in polarity circuits



SPECIFICATIONS

Item	Characteristic												
Operation Temperature Range	-40 ~ +85°C												
Rated Working Voltage	6.3 ~ 50VDC												
Capacitance Tolerance (120Hz 20°C)	$\pm 20\%$ (M)												
Leakage Current (20°C)	I $\leq 0.05CV$ or 10 (μA) *Whichever is greater after 2 minutes I: Leakage Current (μA) C: Rated Capacitance (μF) V: Working Voltage (V)												
Surge Voltage (20°C)	W.V.	6.3	10	16	25	35	50						
	S.V.	8	13	20	32	44	63						
Dissipation Factor (tan δ) (120Hz 20°C)	W.V.	6.3	10	16	25	35	50						
	tan δ	0.26	0.22	0.20	0.20	0.20	0.18						
Low Temperature Stability	Impedance ratio at 120Hz												
	Rated Voltage (V)	6.3	10	16	25	35	50						
	-25°C / +20°C	4	3	2	2	2	2						
	-40°C / +20°C	8	6	4	4	3	3						
Load Life	After 2000 hours application of W.V. and +85°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage \leq rate working voltage) (The polarity need to exchange every 250 hours)												
	Capacitance Change	$\leq \pm 25\%$ of initial value											
	Dissipation Factor	$\leq 200\%$ of initial specified value											
	Leakage current	\leq initial specified value											
Shelf Life	At +85°C, no voltage application after 1000 hours, the capacitor shall meet the limits for load life characteristics. (With voltage treatment)												
Resistance to Soldering Heat	Capacitors placed on a 250°C hot plate for 30 seconds with their electrode terminals facing downward will fulfill the following conditions after being cooled to room temperature.												
	Capacitance Change	$\leq \pm 10\%$ of initial value											
	Dissipation Factor	\leq initial specified value											
	Leakage current	\leq initial specified value											

PART NUMBERING SYSTEM

Meritek Series	SNP	50V	470	M	F	054	
Voltage							
Capacitance							
Capacitance expressed in microfarads (μF). First two digits are significant figures. Third digit denotes number of zeros. 'R' denotes decimal point for values less than 10 μF							
Tolerance							
M= $\pm 20\%$							
Case Diameter Code							

Case Height (mm)

The third digit denotes the first decimal place

For example, 054 = 5.4mm

Case Diameter Code	Φ D
D	Φ 4.0
E	Φ 5.0
F	Φ 6.3

Surface Mount Aluminum Electrolytic Capacitors




SNP Series

(Non Polarity, 85°C)

MERITEK

DIMENSIONS (mm)

ΦD	L	A	H	I	W	P	K
$\Phi 4.0$	5.4	4.3	5.5MAX	1.8	0.65 ± 0.1	1.0	$0.35^{+0.15}_{-0.20}$
$\Phi 5.0$	5.4	5.3	6.5MAX	2.2	0.65 ± 0.1	1.5	$0.35^{+0.15}_{-0.20}$
$\Phi 6.3$	5.4	6.6	7.8MAX	2.6	0.65 ± 0.1	2.1	$0.35^{+0.15}_{-0.20}$

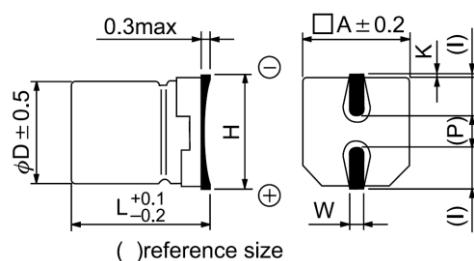

CASE SIZE & MAX RIPPLE CURRENT

Cap. (μ F)	V	6.3		10		16		25		35		50			
		Item	DxL	R.C.	DxL	R.C.									
0.1	0R1												4x5.4	2	
0.22	R22												4x5.4	3	
0.33	R33												4x5.4	4	
0.47	R47												4x5.4	5	
1.0	010												4x5.4	7	
2.2	2R2												4x5.4	10	
3.3	3R3									5x5.4	13	5x5.4	14	5x5.4	14
4.7	4R7					4x5.4	14	5x5.4	16	5x5.4	17	6.3x5.4	19		
10	100			4x5.4	19	5x5.4	23	6.3x5.4	27	6.3x5.4	28				
22	220	5x5.4	29	6.3x5.4	36	6.3x5.4	39								
33	330	6.3x5.4	41	6.3x5.4	45	6.3x5.4	48								
47	470	6.3x5.4	49												

Surface Mount Aluminum Electrolytic Capacitors




SNP Series

(Non Polarity, 85°C)


MERITEK

TAPING

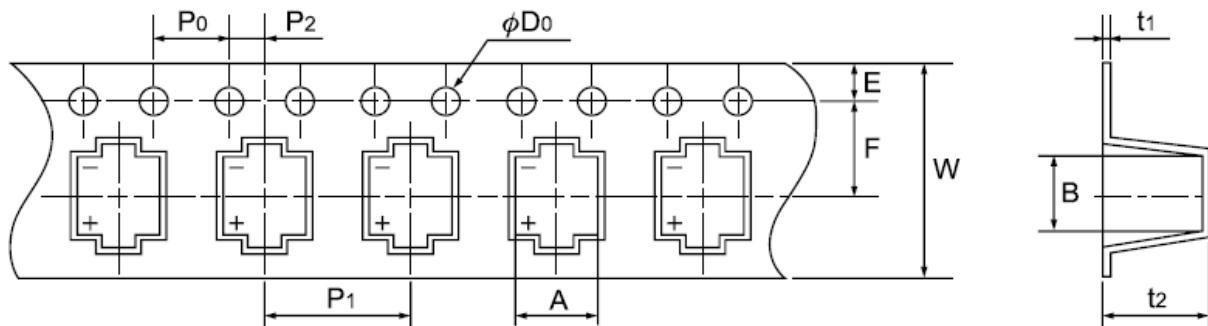

D x L	W ±0.3	A ±0.2	B ±0.2	P ₀ ±0.1	P ₁ ±0.1	P ₂ ±0.1	F ±0.1	ØD ₀ ±0.1	t ₁ ±0.1	E ±0.1	t ₂ ±0.2
Ø4x5.4	12.0	4.7	4.7	4.0	8.0	2.0	5.5	1.5	0.4	1.75	5.7
Ø5x5.4	12.0	5.7	5.7	4.0	12.0	2.0	5.5	1.5	0.4	1.75	5.7
Ø6.3x5.4	16.0	7.0	7.0	4.0	12.0	2.0	7.5	1.5	0.4	1.75	5.7
Ø4x5.8	12.0	4.7	4.7	4.0	8.0	2.0	5.5	1.5	0.4	1.75	6.3
Ø5x5.8	12.0	5.7	5.7	4.0	12.0	2.0	5.5	1.5	0.4	1.75	6.4
Ø6.3x5.8	16.0	7.0	7.0	4.0	12.0	2.0	7.5	1.5	0.4	1.75	6.4
Ø6.3x7.7	16.0	7.0	7.0	4.0	12.0	2.0	7.5	1.5	0.4	1.75	8.2
Ø8x6.2	16.0	8.7	8.7	4.0	12.0	2.0	7.5	1.5	0.4	1.75	6.8
Ø8x10.2	24.0	8.7	8.7	4.0	16.0	2.0	11.5	1.5	0.4	1.75	11.0
Ø10x10.2	24.0	10.7	10.7	4.0	16.0	2.0	11.5	1.5	0.4	1.75	11.0

PACKAGE

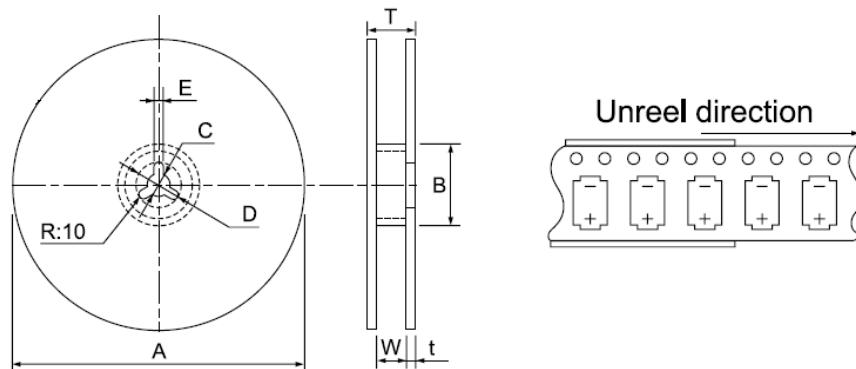


D x L	A ±2.0	B MIN	C ±0.5	D ±0.8	E ±0.5	W ±1.0	T ±1.0	t ±0.5
Ø4 Ø5	380	50	13	21	2.0	14.0	20.0	3.0
Ø6.3	380	50	13	21	2.0	18.0	24.0	3.0
Ø8x6.2	380	50	13	21	2.0	18.0	24.0	3.0
Ø8x10.2	380	50	13	21	2.0	26.0	32.0	3.0
Ø10x10.2	380	50	13	21	2.0	26.0	32.0	3.0



PERMISSIBLE REFLOW CONDITION

AIR REFLOW AND IR REFLOW

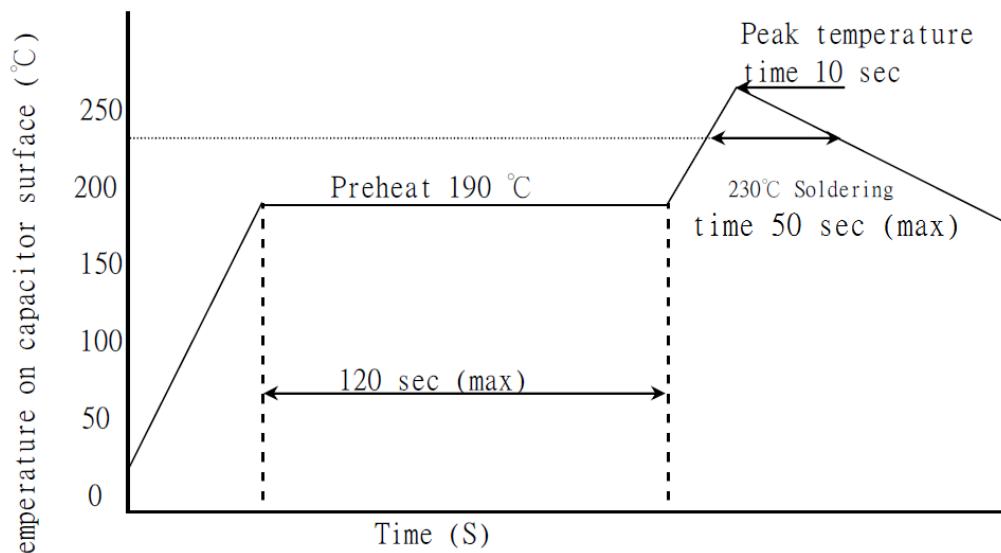

Preheat: Within 120sec., 190°C or less.

Soldering Time: Within 50 sec., 230°C

Peak Temperature: Less than 250°C, within 10 sec.

Possible Reflow Cycle: 2 Cycles

The final test values should be as following:

- (A) Capacitance change: $\leq \pm 10\%$ of initial value
- (B) Dissipation factor: \leq initial specified value
- (C) Leakage current: \leq initial specified value
- (D) Visual: No damage