
PROPRIETARY INFORMATION: PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 17601, SO	12/01/09	BS
В	UPDATE END 'A' TO WS-311, END 'B' TO WS-002, RFS. 25251, EM	10/17/13	BS
С	UPDATE END 'A' TO YC-12, END 'B' TO YP-04, RFS. 25836, EM	03/11/15	HM

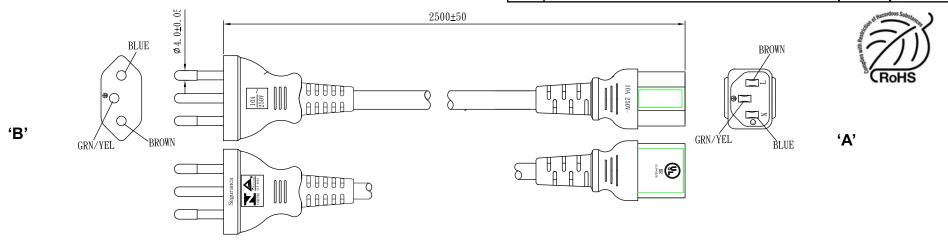

GENERAL SPECIFICATIONS:

RATING: 10A / 250 V AC

CABLE TYPE / SIZE: H05VV-F, 3 X 1.0 mm ²

TEMPERATURE RATING: 70° C
CABLE JACKET COLOR: BLACK
OVERALL LENGTH (L): 2500 ± 50 mm

CABLE OUTER DIAMETER: 7.0 ± 0.2 mm
END 'A' TERMINATION: IEC 320/C13; YC-12
END 'B' TERMINATION: BRAZILIAN; YP-04
APPROVALS PLUG: INMETRO, UL BR


APPROVALS CONNECTOR: UL BR

NOTES:

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

PACKING:

HANKED MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.



RELEASED

By N.Frost at 5:09 pm, Mar 12, 2015

