
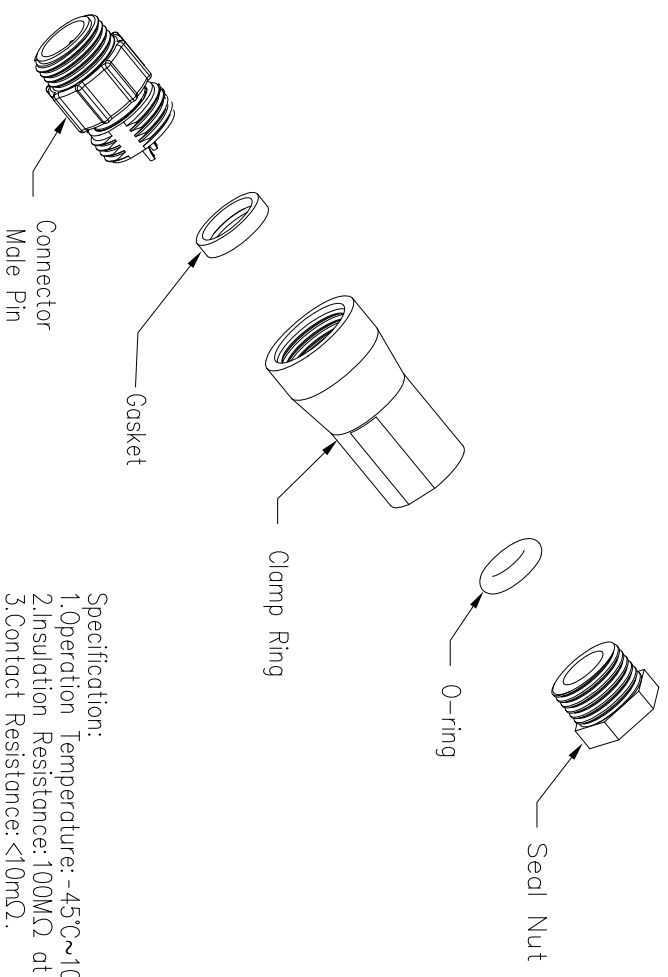
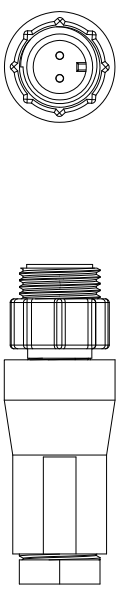



REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Victory	2019/08/22

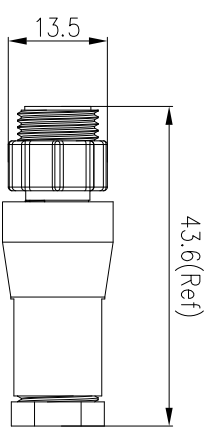

2 Pin	P/N: 21002311-01	P/N: 21003311-01	P/N: 21004311-01
3 Pin			
4 Pin			

21XXX311-01  
Pin Number

Pin Assignments Front View



Mini Series Screw Type  
Female Plug With Male Pin

UNIT: mm	SCALE: 1:1	SHEET: 1 OF 1
TOLERANCE: X: ±0.25 XX: ±0.15 XXX: ±0.05	REV: C1	SIZE: A4
ANGLES: ±1°		*: Inspection Item

- Specification:
1. Operation Temperature: -45°C~105°C.
  2. Insulation Resistance: 100MΩ at DC 500V.
  3. Contact Resistance: <10mΩ.
  4. Withstand Voltage: 1500V AC.
  5. Operating Current: 5A.
  6. Operating Voltage: AC 110V.
  7. Waterproof Rate: IP67(Mated).
  8. Connector: Nylon+GF, Black.
  9. Seal Nut: Nylon, Black.
  10. O-Ring: Silicon, Red.
  11. Clamp Ring: Nylon, Black.
  12. Gasket: Silicon, Red.
  13. Male Pin: Copper Alloy, Gold Plated.
  14. RoHS Compliant.
  15. UL Compliant.
  16. Cable Range OD: φ4.7mm~6.2mm
  17. Mating Cap P/N: 806-00028-00.

PART NO 21XXX311-01

DRAWN BY Victory

DATE 2019/08/22

DWG NO

CHECKED BY Ivan

DATE 2019/08/22

CUSTOMER

APPROVED BY Ponson

DATE 2019/08/22

**CHOGORI**