


recommended torque of counter nut: 2Nm
order contacts separately

| cable ϕ | wire gauge | part-no. contact |
|--------------|------------|------------------|
| 5,7-8,8mm | AWG 26-22 | 09 67 000 5576 |
| | AWG 24-20 | 09 67 000 8576 |
| | AWG 22-18 | 09 67 000 3576 |

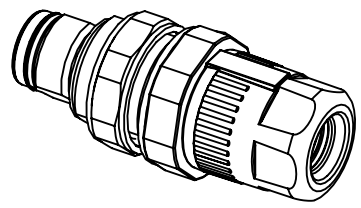

| | | | | | | | |
|------------------------------|--|---|-----------------------|--------------------------|---------------------------|--|------------------------|
| | All Dimensions in mm Original Size DIN A4 | | Scale 1:1 | Free size tol. | | Ref. | |
| | All rights reserved Department EL PD | | Created by BALSAN | Inspected by FARCASIU | Standardisation 302077 | Sub. | |
| HARTING D-32339 Espelkamp | | Title M12-SD-CC-CRIMP-5P-ACOD-M-STR-SHLD | | | | Date 2020-12-22 | State Final Release |
| | | Type TB | Number 21038211525 | | | Doc-Key / ECM-Nr. 100767457/UGD/001/F 500000186658 | Rev. F |
| | | | | | | Page 1/1 | |