


complete length when assembled app. 42

A (2:1)

contact face acc. to IEC 61076-2-101

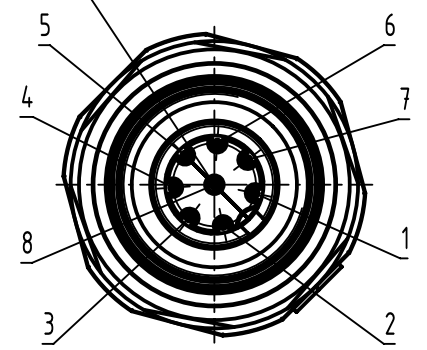

SW15  
width across flats: 15

panel thickness

Panel cut out (1:1)

min. 2 - max. 5

Ø16,3±0,2

14,3±0,2

recommended torque of counter nut: 2Nm  
order contacts separately

|  |  |                          |                           |                     |  |
|--|--|--------------------------|---------------------------|---------------------|--|
| 5,7-8,8mm                                    |  | AWG 26-22                |                           | 21 01 100 9025      |  |
| cable Ø                                      |  | wire gauge               |                           | contact part number |  |
| All Dimensions in mm<br>Original Size DIN A4 | Scale<br>1:1                                   | Free size tol.           |                           | Ref.                |  |
|  |  |                          |                           | Sub.                |  |
| All rights reserved<br>Department EL PD      | Created by<br>BALSAN                           | Inspected by<br>FARCASIU | Standardisation<br>ROEBEN | Date<br>2022-02-21  | State<br>Final Release                                   |
|  | Title<br>M12 PFT Crimp SD Female 8pole A-coded |                          |                           |                     | Doc-Key / ECM-Nr.<br>100708197/UGD/001/G<br>500000212208 |
| HARTING<br>D-32339 Espelkamp                 |  | Type<br>TB               | Number<br>21038212825     |                     | Rev.<br>G  |
|  |  |                          |                           |                     | Page<br>1/1  |