


1 MALE END VIEW




- 1. BU
- 2. RD
- 3. BN
- 4. GY
- 5. GN/YE
- 6. RD/BU
- 7. GN
- 8. GY/PK
- 9. WH/GN
- 10. WH/YE
- 11. WH/GY
- 12. BK
- 13. YE/BN
- 14. BN/GN
- 15. WH
- 16. YE
- 17. PK

HARTING P/N	Type of cable	Cable length(mm)
21373300F72050	PUR	5000 ⁺²⁰⁰ ₋₀
21373300F72100	PUR	10000 ⁺⁴⁰⁰ ₋₀
21373300F73050	PVC	5000 ⁺²⁰⁰ ₋₀
21373300F73100	PVC	10000 ⁺⁴⁰⁰ ₋₀

5 SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE	
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	
CONTACT MATERIAL/COLOR	BRASS/GOLD	
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL	
RATED CURRENT	9 A	
RATED VOLTAGE	150 V	
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK	PUR/BLACK
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS (AWG)	17X18AWG	
OPERATING TEMPERATURE	-40°C — +80°C	
PROTECTION CLASS	IEC IP67	

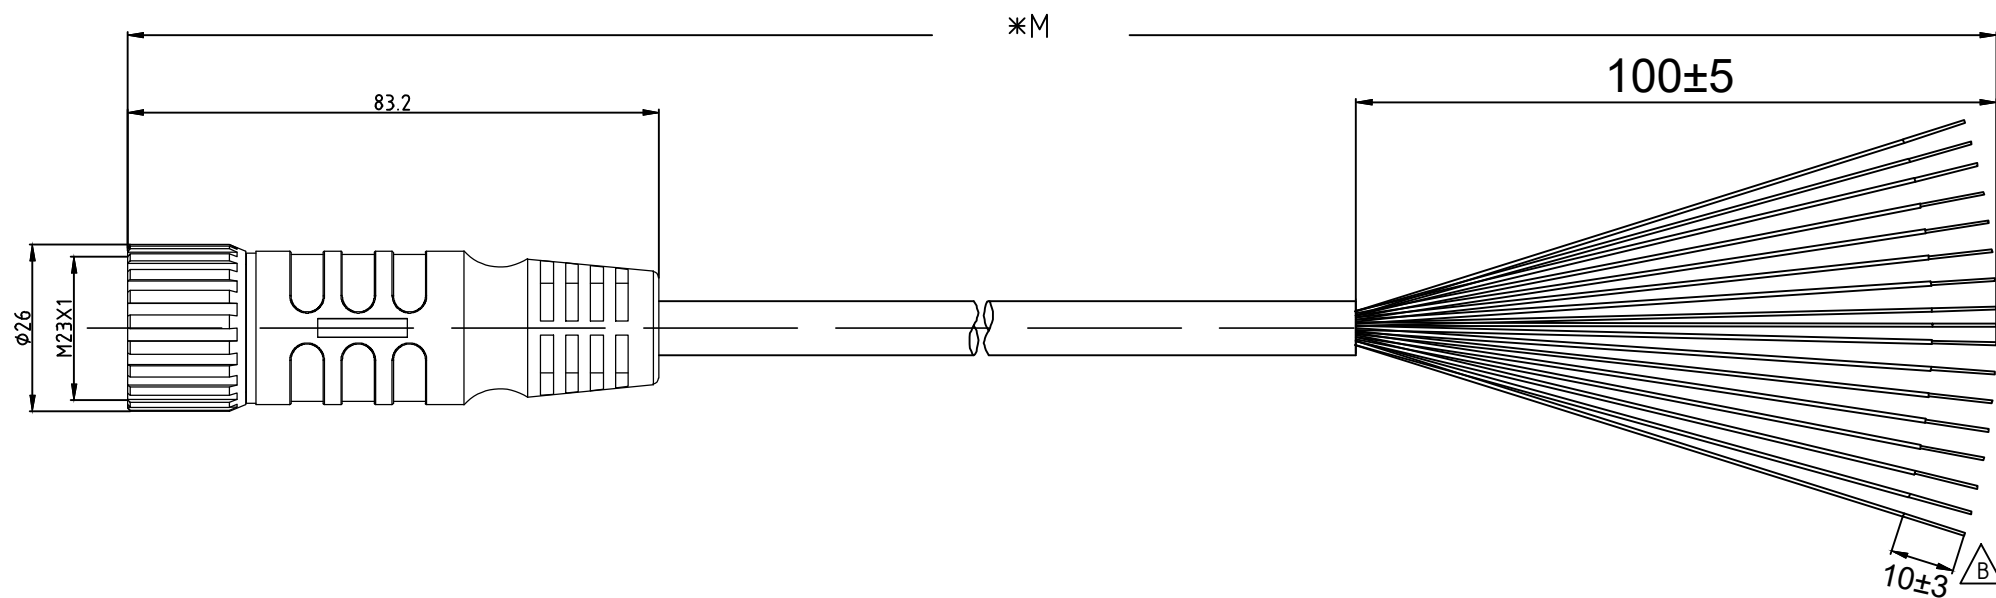

	All rights reserved	Created by LINI	Inspected by LIANL	Standardisation LIANL	Date 2021-09-03	State Final release	According to production drawing
Department HCS - CN		Title M23_17P MA,Int-thread,STR PVC/PUR cable,xxM				Doc-Key / ECM-Nr. /	
HARTING Customised Solutions		Type TB	Number 2137 33 00 F 7X XXX			Rev. B	Page 1/1
B	Revised stripping tolerance (ECN21405)	Ivy Lin	08/31/21	D-32339 Espelkamp			
A	First issue.	Lucy Zheng	06/25/19				
Rev.	Description	Appr.	Date				

*M


83.2

100±5

∅26
M23X1

10±3

B



All Dimensions
in mm

Tech. Character.

Free size tol.

According to production drawing



All rights reserved

Created by

LINI

Inspected by

LIANL

Standardisation

LIANL

Date

2021-09-03

State

Final release

Title

M23_17P MA,Int-thread,STR PVC/PUR cable,xxM

Doc-Key / ECM-Nr.

/

Type

TB

Number

2137 33 00 F 7X XXX

Rev.

B

Page

1/1