


3

HARTING P/N	Type of cable	Cable length(mm)
21373400D74050	PUR	5000 ⁺²⁰⁰ ₋₀
21373400D74100	PUR	10000 ⁺⁴⁰⁰ ₋₀
21373400D75050	PVC	5000 ⁺²⁰⁰ ₋₀
21373400D75100	PVC	10000 ⁺⁴⁰⁰ ₋₀

5

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE	
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	
CONTACT MATERIAL/COLOR	BRASS/GOLD	
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL	
RATED CURRENT	9A(PINS 6,12,19),2A(ALL OTHERS)	
RATED VOLTAGE	150 V	
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK	PUR/BLACK
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS (AWG)	3X18AWG+16X22AWG	
OPERATING TEMPERATURE	-40°C — +80°C	
PROTECTION CLASS	IEC IP67	

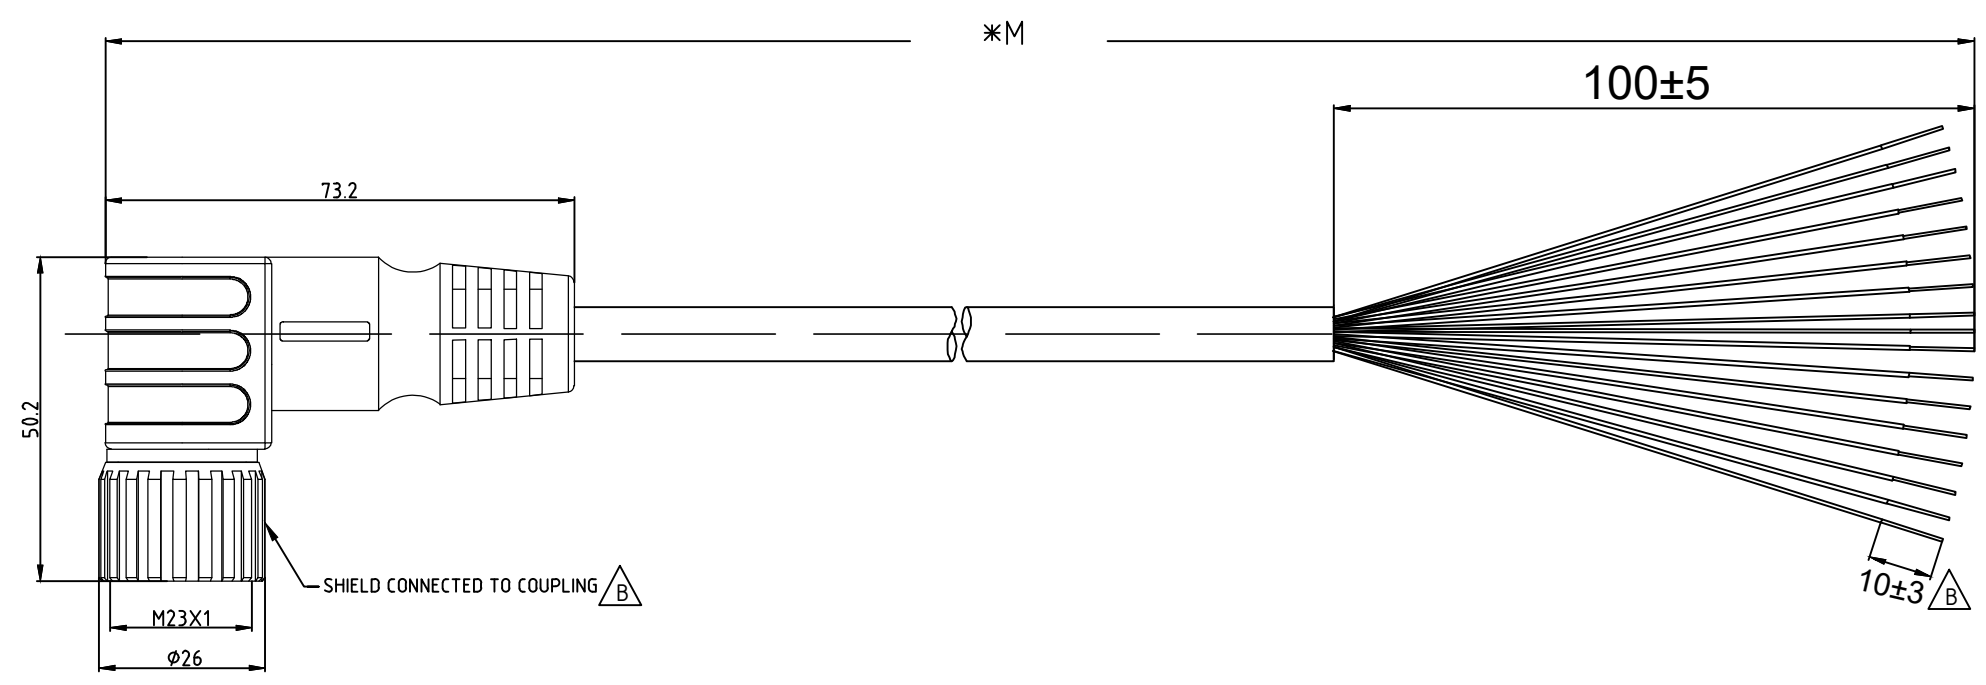

D

	All rights reserved	Created by LINI	Inspected by LIANL	Standardisation LIANL	Date 2021-09-02	State Final release	Doc-Key / ECM-Nr. /
Department HCS - CN		Title M23_19P MA,Int-thread,ANG PVC/PUR cable,xxM				Rev. B	
HARTING Customised Solutions		Type TB	Number 2137 34 00 D 7X XXX			Page 1/1	
D-32339 Espelkamp							

Rev.	Description	Appr.	Date
B	Revised stripping tolerance (ECN21405)	Ivy Lin	09/02/21
A	First issue.	Lucy Zheng	06/25/19