


A

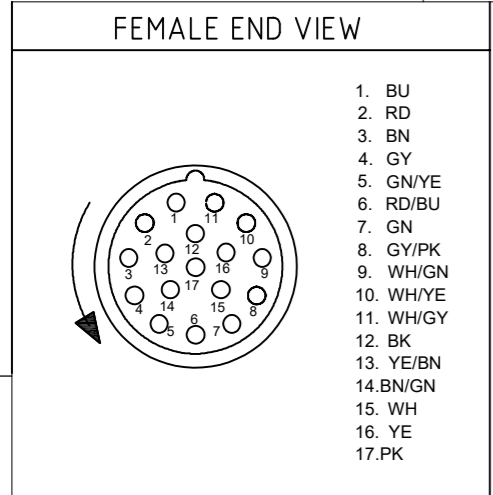


HARTING P/N	Type of cable	Cable length(mm)
21373500F72050	PUR	5000 <sup>+200</sup> <sub>-0</sub>
21373500F72100	PUR	10000 <sup>+4.00</sup> <sub>-0</sub>

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/COLOR	BRASS/SILVER
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
RATED CURRENT	9A(POWER);2A(SIGNAL)
RATED VOLTAGE	150 V
OUTER CABLR JACKET MATERIAL/COLOR	PUR/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	3x18AWG+16X22AWG(CUT OFF VT,GY/BN)
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

B

C

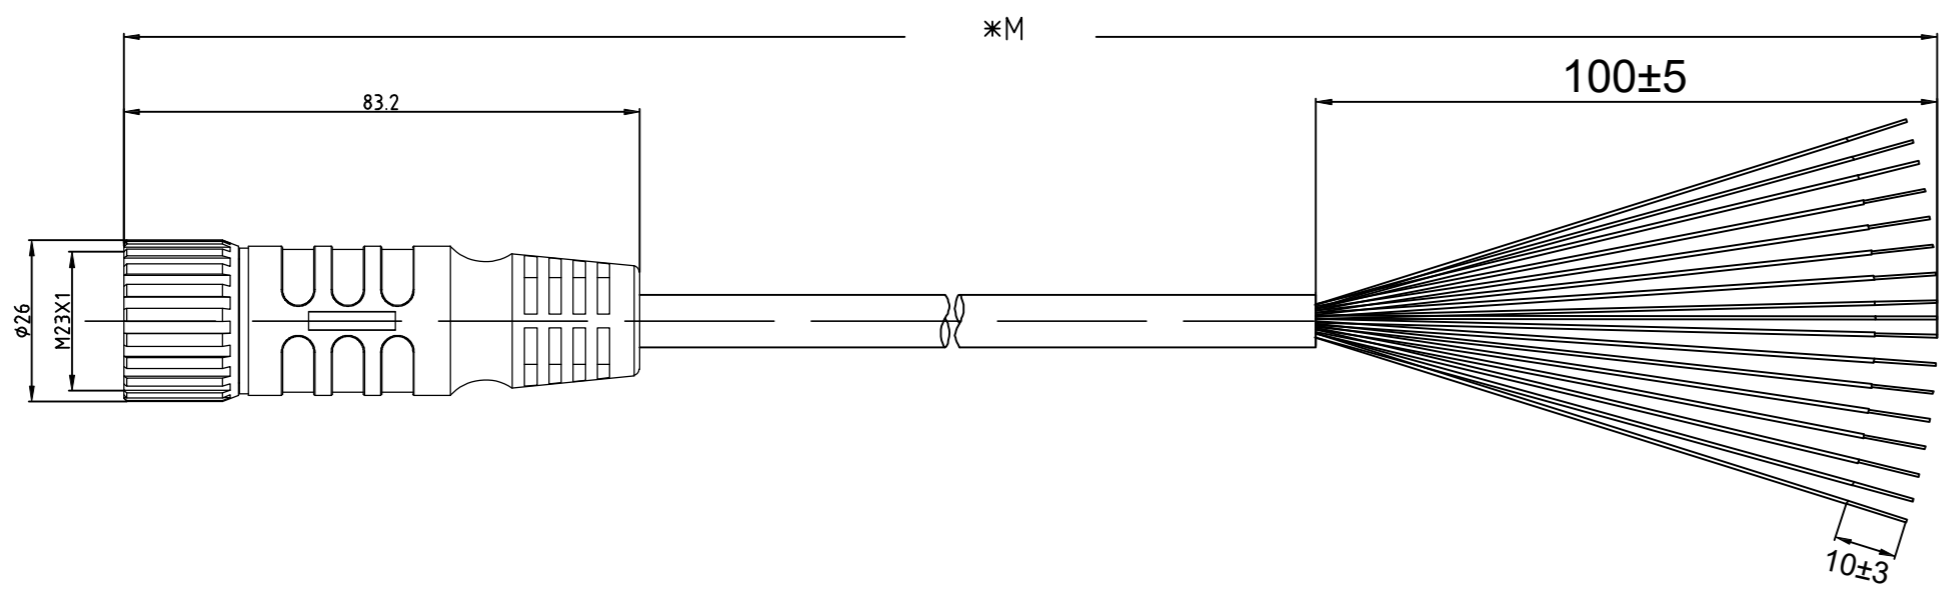

D

	All rights reserved Department HCS - CN	Created by LINI	Inspected by LIANL	Standardisation LIANL	Date 2022-11-02	State Final release	Doc-Key / ECM-Nr. /
HARTING Customised Solutions D-32339 Espelkamp		Title M23_17P FE,Int-thread,STR PUR cable,xxM	Type TB	Number 2137 35 00 F 72 XXX	Rev. <b>A</b> Page 1/1		

Rev.	Description	Appr.	Date
A	First issue.	Ivy Lin	11/02/22