


A

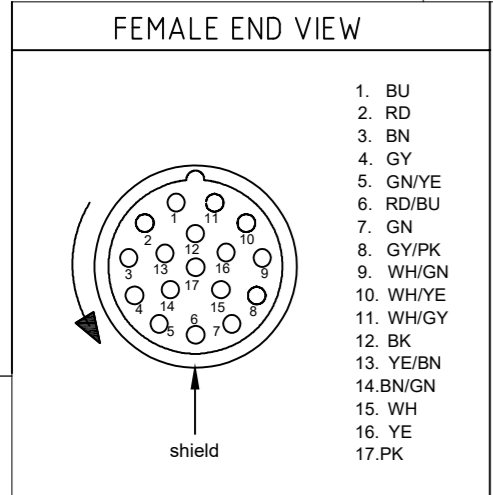


- 1. BU
- 2. RD
- 3. BN
- 4. GY
- 5. GN/YE
- 6. RD/BU
- 7. GN
- 8. GY/PK
- 9. WH/GN
- 10. WH/YE
- 11. WH/GY
- 12. BK
- 13. YE/BN
- 14. BN/GN
- 15. WH
- 16. YE
- 17. PK

HARTING P/N	Type of cable	Cable length(mm)
21373500F73050	PVC	5000 <sup>+200</sup> <sub>-0</sub>
21373500F73100	PVC	10000 <sup>+4.00</sup> <sub>-0</sub>

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/COLOR	BRASS/SILVER
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
RATED CURRENT	9A(POWER);2A(SIGNAL)
RATED VOLTAGE	150 V
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	3x18AWG+16X22AWG(CUT OFF VT,GY/BN)
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

B

C

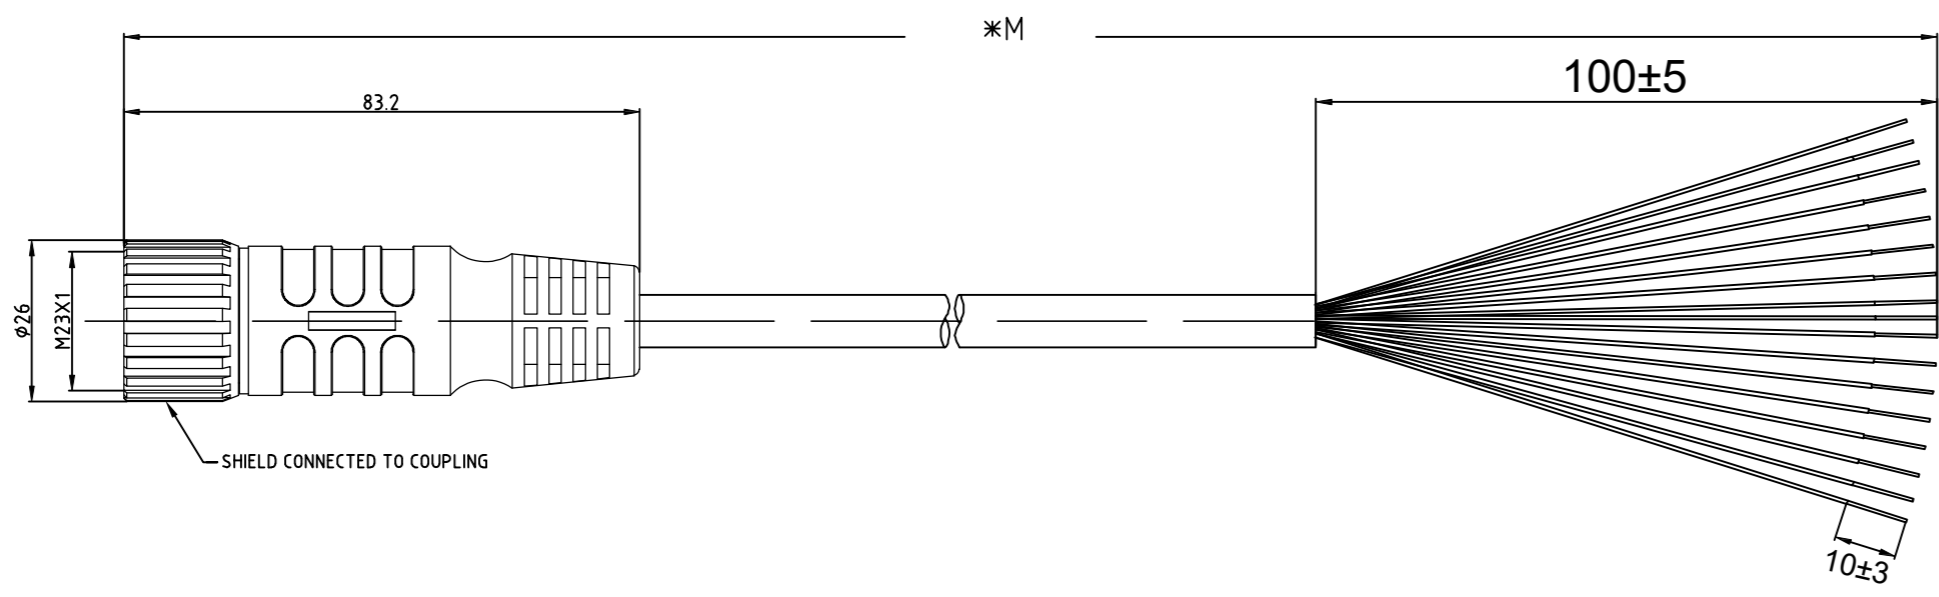

D

	All rights reserved Department HCS - CN	Created by LINI		Inspected by LIANL	Standardisation LIANL	Date 2022-11-02	State Final release	
HARTING Customised Solutions D-32339 Espelkamp		Title M23_17P FE,Int-thread,STR PVC cable,xxM					Doc-Key / ECM-Nr. /	
Rev.	Description	Appr.	Date	Type TB	Number 2137 35 00 F 73 XXX	Rev. A	Page 1/1	

A	First issue.	Ivy Lin	11/02/22
Rev.	Description	Appr.	Date