


1 2 3 4 5 6

FEMALE END VIEW




- 1. BN
- 2. BU
- 3. WH
- 4. GN/YE
- 5. OG
- 6. YE
- 7. GY
- 8. PK
- 9. RD
- 10. BN/WH
- 11. BU/WH
- 12. GN/WH

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE	
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	
CONTACT MATERIAL/COLOR	BRASS/SILVER	
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL	
RATED CURRENT	6 A	
RATED VOLTAGE	300 V	
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK	PUR/BLACK
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS (AWG)	12X18AWG	
OPERATING TEMPERATURE	-40°C — +80°C	
PROTECTION CLASS	IEC IP67	

HARTING P/N	Type of cable	Cable length(mm)
21373600C70050	PUR	5000 ⁺²⁰⁰ ₋₀
21373600C70100	PUR	10000 ⁺⁴⁰⁰ ₋₀
21373600C71050	PVC	5000 ⁺²⁰⁰ ₋₀
21373600C71100	PVC	10000 ⁺⁴⁰⁰ ₋₀

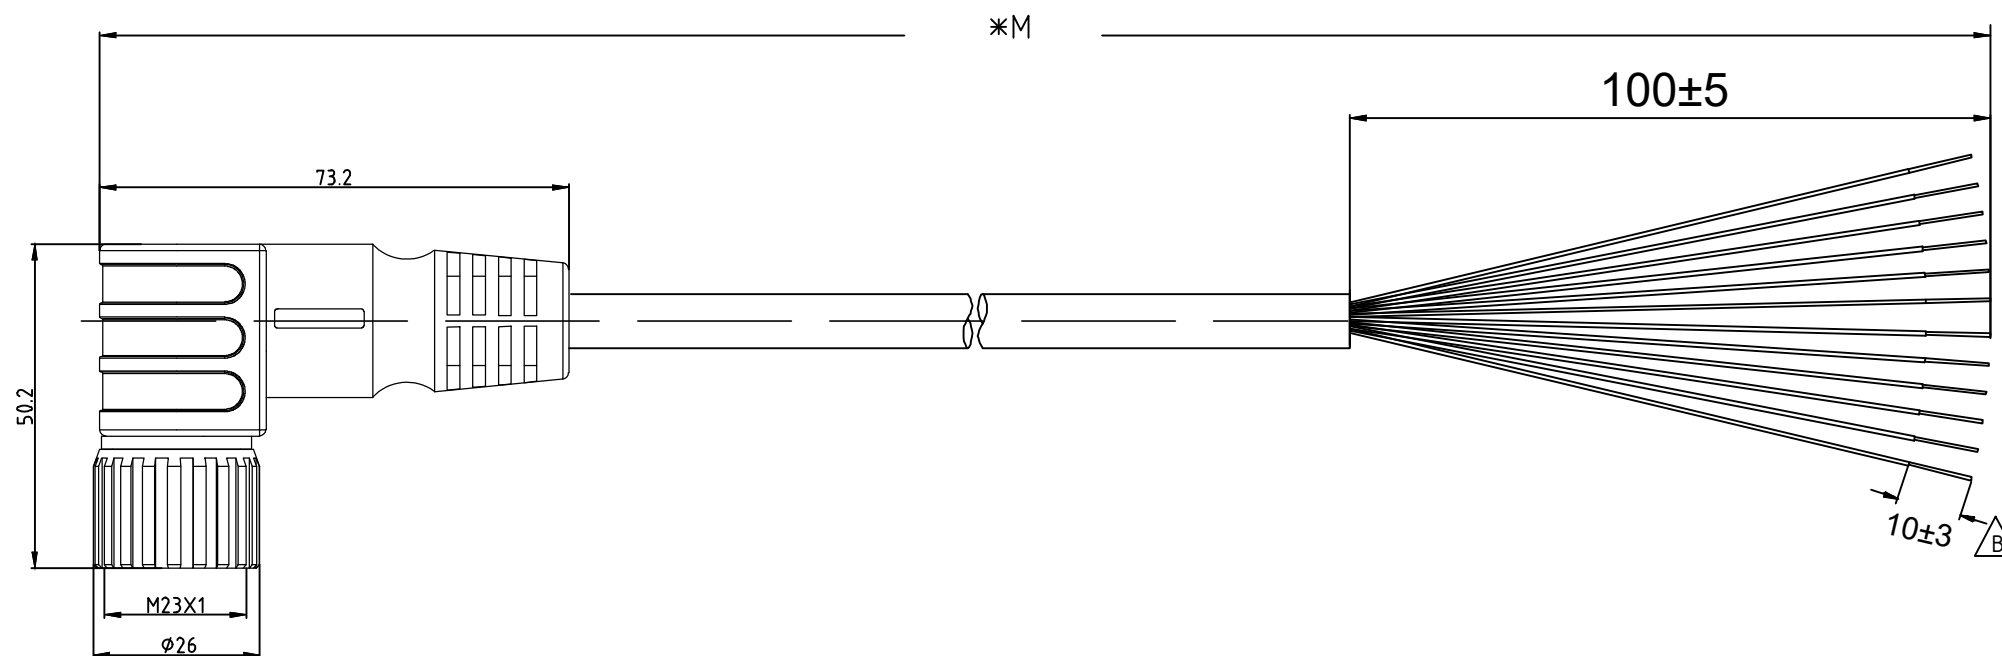

	All rights reserved Department HCS - CN	Created by LINI	Inspected by LIANL	Standardisation LIANL	Date 2021-08-31	State Final release	Doc-Key / ECM-Nr. /
All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
HARTING Customised Solutions D-32339 Espelkamp		Title M23_12P FE,Int-thread,ANG PVC/PUR cable,xxM Type TB Number 2137 36 00 C 7X XXX				Rev. B Page 1/1	

Rev.	Description	Appr.	Date
B	Revised stripping tolerance (ECN21405)	Ivy Lin	08/31/21
A	First issue.	Lucy Zheng	06/25/19