


HARTING P/N	Revision	Cable length(mm)
21373800G78050	00	5000 <sup>+200</sup> <sub>-0</sub>
21373800G78100	00	10000 <sup>+400</sup> <sub>-0</sub>

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/COLOR	BRASS/SILVER
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
RATED CURRENT	10A(PINSA-D) 30A(PINS1-4)
RATED VOLTAGE	250V(PINSA-D) 630V(PINS1-4)
OUTER CABLR JACKET MATERIAL/COLOR	PUR/DRANGE
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	4G1.5+2*(2*0.75)
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

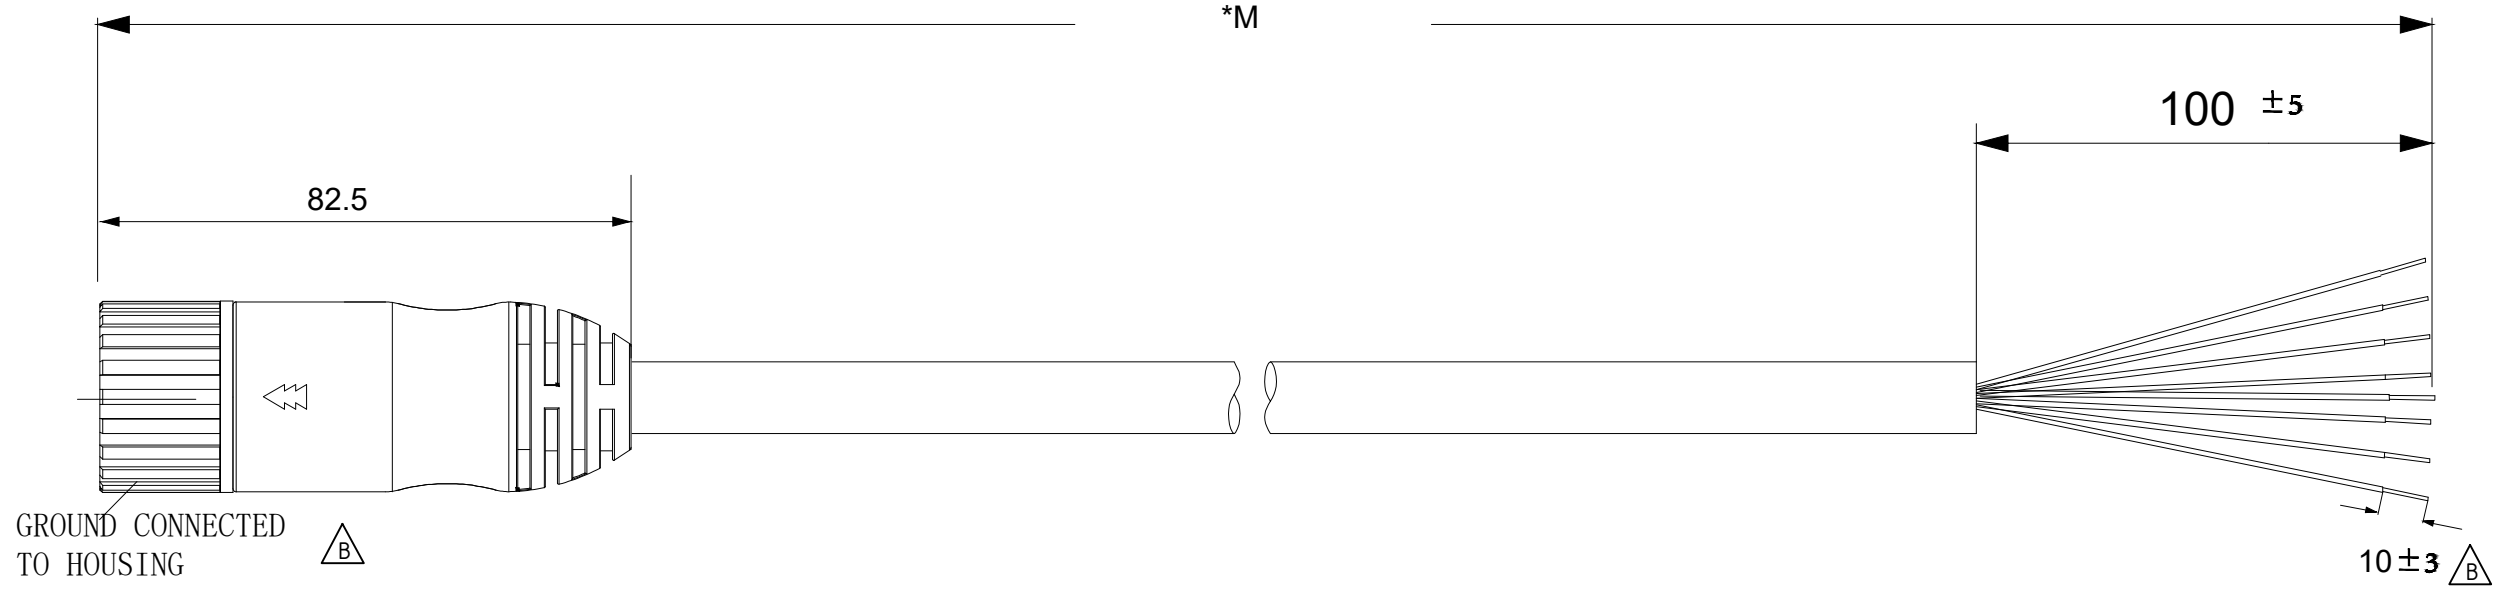

	All rights reserved	Created by LINI	Inspected by LIANL	Standardisation LIANL	Date 2021-09-03	State Final release	
	Department HCS - CN	Title M23_8P FE,int-thread,STR PUR cable,xxM				Doc-Key / ECM-Nr. /	
		Type TB				Number 2137 38 00 G 78 XXX	
						Rev. B	Page 1/1

Rev.	Description	Appr.	Date
B	Revised stripping tolerance (ECN21405)	Ivy Lin	09/03/21
A	First issue.	Lucy Zheng	06/04/19

HARTING Customised Solutions  
D-32339 Espelkamp