


Coaxial PCB Connector  
82\_MCX-50-0-17/111\_N\_-1

Description

Straight PCB jack

Interface Standards  
IEC 60169-36\_CECC 22220

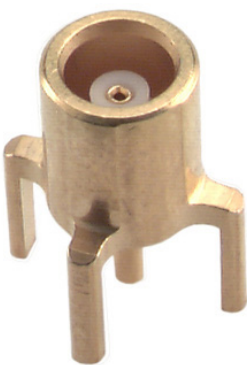

Technical Data

<b>Electrical Data</b>	
Impedance	50 Ω
Interface frequency max.	6 GHz
<b>Mechanical Data</b>	
Board mounting type	through holes
Weight	0.0007 kg
<b>Environmental Data</b>	
Operating temperature	-65 °C to 165 °C
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer contact	Brass	SUCOPRO Plating
Body	Brass	SUCOPRO Plating
Insulator	PFA / PTFE	

Related Documents

Outline drawing	DOU-00012981
Catalogue drawing	DCA-00012983

Ordering Information

Bulk 100 pcs package	82_MCX-50-0-17/111_NH-1
----------------------	-------------------------

Remarks

PCB connector without stand-offs