
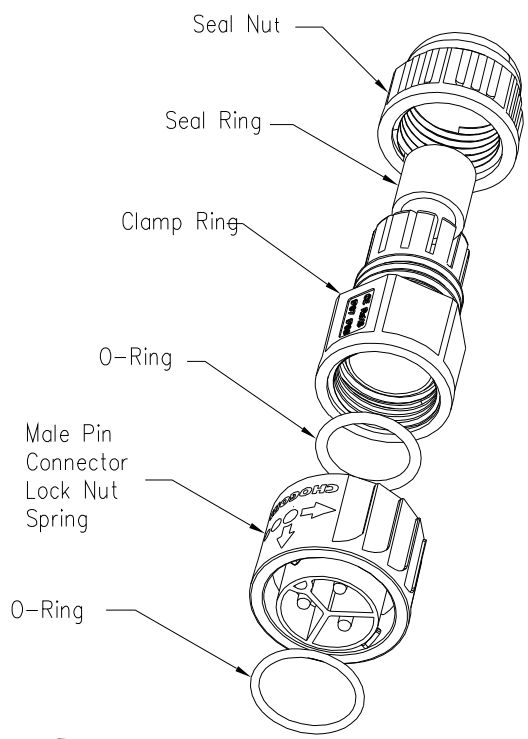





| REV. | ECN NO. | DESCRIPTION | SIGN | DATE |
|------|---------|-----------------|------|------------|
| C1 | N/A | INITIAL DRAWING | Liu | 2020/04/23 |

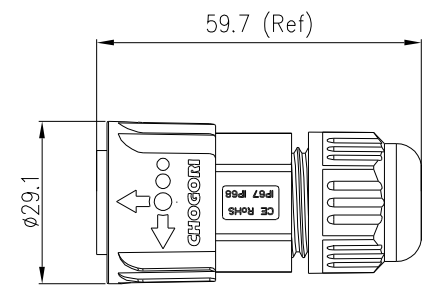

24XXX131-XX Cable Range OD
 01 OD: φ5.5mm~φ6.5mm
 02 OD: φ8.0mm~φ10.5mm
 Pin Number

- Specification:
- 1.Operation Temperature: -45°C~105°C.
 - 2.Insulation Resistance:100MΩ at DC500V.
 - 3.Contact Resistance:<10mΩ
 - 4.Withstand Voltage: 2000V AC
 - 5.Operating Current:20A
 - 6.Operating Voltage:AC 300V
 - 7.Waterproof Rate:IP67 (Mated)
 - 8.Seal Nut:Nylon, Black
 - 9.Seal Ring:Silicon, Black.
 - 10.Clamp Ring:Nylon, Black
 - 11.O-Ring:Silicon, Red
 - 12.Male Pin:Copper Alloy, Gold Plated
 - 13.Connector:Nylon+GF, Black
 - 14.Lock Nut:Nylon, Blue
 - 15.Spring:SUS
 - 16.O-Ring:Silicon, Red
 - 14.RoHS Compliant.
 - 15.Mating Cap:804-00008-00

| | |
|----------------------------|------------------|
| | |
| 2 Pin | 3 Pin |
| P/N: 24002131-0X | P/N: 24003131-0X |
| Pin Assignments Front View | |



CHOGORI®

| | | | | | | | | | |
|-----------|---|-------------|--|--------------------|-------------|-------------|-------|------|------------|
| UNIT:mm | | DESCRIPTION | Large Series Push Lock Male Plug With Male Pin | PART NO | 24XXX131-XX | DRAWN BY | Liu | DATE | 2020/04/23 |
| TOLERANCE | .X ±0.25 .XX ±0.15 .XXX ±0.05 ANGLES ±1° | SCALE | 1:1 | SHEET | 1 OF 1 | CHECKED BY | Mo | DATE | 2020/04/23 |
| REV. | C1 | SIZE | A4 | * :Inspection Item | | APPROVED BY | Adley | DATE | 2020/04/23 |

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.